

Engineering Data Book

Air to Water Heat Pump

ESTiA



Hydro Unit

-Wall Mounted Type-

- HWT-601XWHM3W-E
- HWT-601XWHM6W-E
- HWT-601XWHT6W-E
- HWT-1101XWHM3W-E
- HWT-1101XWHM6W-E
- HWT-1101XWHT6W-E

- HWT-1101XWHT9W-E
- HWT-1401XWHM3W-E
- HWT-1401XWHM6W-E
- HWT-1401XWHT6W-E
- HWT-1401XWHT9W-E

-All In One Type-

- HWT-602S21SM3W-E
- HWT-602S21SM6W-E
- HWT-602S21ST6W-E
- HWT-602S21MM3W-E
- HWT-602S21MM6W-E
- HWT-602S21MT6W-E
- HWT-1102S21SM3W-E
- HWT-1102S21SM6W-E
- HWT-1102S21MM3W-E
- HWT-1102S21MM6W-E
- HWT-1102S21ST6W-E

- HWT-1102S21ST9W-E
- HWT-1102S21MT6W-E
- HWT-1102S21MT9W-E
- HWT-1402S21SM3W-E
- HWT-1402S21MM3W-E
- HWT-1402S21SM6W-E
- HWT-1402S21MM6W-E
- HWT-1402S21ST6W-E
- HWT-1402S21MT6W-E
- HWT-1402S21ST9W-E
- HWT-1402S21MT9W-E



Outdoor Unit

- HWT-401HW-E
- HWT-601HW-E
- HWT-801HW-E
- HWT-1101HW-E
- HWT-1401HW-E
- HWT-801HRW-E
- HWT-1101HRW-E

- HWT-1401HRW-E
- HWT-801H8W-E
- HWT-1101H8W-E
- HWT-1401H8W-E
- HWT-801H8RW-E
- HWT-1101H8RW-E
- HWT-1401H8RW-E



Hot Water Cylinder

- HWS-1501CSHM3-E
- HWS-2101CSHM3-E

- HWS-3001CSHM3-E

Contents

1. SYSTEM OVERVIEW	3
1-1. System combination	4
1-2. System specifications	7
2. HYDRO UNIT	9
2-1. Specifications	10
2-1-1. Hydro unit specifications	10
Wall Mounted Type	10
All In One Type	13
2-1-2. Electrical supply / cable specifications	19
Wall Mounted Type	19
All In One Type	21
2-2. Dimension	23
Wall Mounted Type	23
All In One Type	24
2-3. Piping Diagram	25
Wall Mounted Type	25
All In One Type	27
2-4. Wiring Diagram	29
2-4-1. Wiring Diagram	29
Wall Mounted Type	29
All In One Type	30
2-4-2. Power line	33
Wall Mounted Type	33
All In One Type	35
2-4-3. Control line	36
Wall Mounted Type	36
All In One Type	37
2-4-4. External Device	39
Wall Mounted Type	39
All In One Type	39
2-5. Capacity Tables	42
2-6. Part Load Tables	66
2-7. Sound Data	130
2-7-1. Sound Characteristics (NC Curve)	130
2-7-2. Sound Power	132
3. OUTDOOR UNIT	134
3-1. Specifications	135
3-1-1. Outdoor unit specifications	135
3-2. Dimension	143

3-3. Piping Diagram	145
3-4. Wiring Diagram	147
3-4-1.Outdoor Unit (Single phase type)	147
3-4-2.Power line	151
3-4-3.Wiring between Hydro Unit and Outdoor Unit.	152
3-5. Operation Range	153
3-6. Sound Data	156
3-6-1.Sound Characteristics (NC Curve)	156
3-6-2.Sound Power	164
4. HOT WATER CYLINDER	172
4-1. Specifications	173
4-2. Dimension	174
4-3. Piping Diagram	175
4-4. Wiring Diagram	177

1. SYSTEM OVERVIEW

1-1. System combination

Combination

Outdoor Unit									
1 phase									
Standard									
with Heater									
Hydro Unit -Wall Mounted Type-	HWT-401HW-E	HWT-601HW-E	HWT-801HW-E	HWT-1101HW-E	HWT-1401HW-E	HWT-801HRW-E	HWT-1101HRW-E	HWT-1401HRW-E	Backup heater
HWT-601XWHM3W-E	○	○							~, 3 kW
HWT-601XWHM6W-E	○	○							~, 6 kW
HWT-601XWHT6W-E	○	○							3N ~, 6 kW
HWT-1101XWHM3W-E			○	○		○	○		~, 3 kW
HWT-1101XWHM6W-E			○	○		○	○		~, 6 kW
HWT-1101XWHT6W-E			○	○		○	○		3N ~, 6 kW
HWT-1101XWHT9W-E			○	○		○	○		3N ~, 9 kW
HWT-1401XWHM3W-E					○			○	~, 3 kW
HWT-1401XWHM6W-E					○			○	~, 6 kW
HWT-1401XWHT6W-E					○			○	3N ~, 6 kW
HWT-1401XWHT9W-E					○			○	3N ~, 9 kW
Hydro Unit -All In One Type-	HWT-401HW-E	HWT-601HW-E	HWT-801HW-E	HWT-1101HW-E	HWT-1401HW-E	HWT-801HRW-E	HWT-1101HRW-E	HWT-1401HRW-E	Backup heater
HWT-602S21SM3W-E	○	○							~, 3 kW
HWT-602S21SM6W-E	○	○							~, 6 kW
HWT-602S21MM3W-E	○	○							~, 3 kW
HWT-602S21MM6W-E	○	○							~, 6 kW
HWT-602S21ST6W-E	○	○							3N ~, 6 kW
HWT-602S21MT6W-E	○	○							3N ~, 6 kW
HWT-1102S21SM3W-E			○	○		○	○		~, 3 kW
HWT-1102S21SM6W-E			○	○		○	○		~, 6 kW
HWT-1102S21MM3W-E			○	○		○	○		~, 3 kW
HWT-1102S21MM6W-E			○	○		○	○		~, 6 kW
HWT-1102S21ST6W-E			○	○		○	○		3N ~, 6 kW
HWT-1102S21MT6W-E			○	○		○	○		3N ~, 6 kW
HWT-1102S21ST9W-E			○	○		○	○		3N ~, 9 kW
HWT-1102S21MT9W-E			○	○		○	○		3N ~, 9 kW
HWT-1402S21SM3W-E					○			○	~, 3 kW
HWT-1402S21SM6W-E					○			○	~, 6 kW
HWT-1402S21MM3W-E					○			○	~, 3 kW
HWT-1402S21MM6W-E					○			○	~, 6 kW
HWT-1402S21ST6W-E					○			○	3N ~, 6 kW
HWT-1402S21MT6W-E					○			○	3N ~, 6 kW
HWT-1402S21ST9W-E					○			○	3N ~, 9 kW
HWT-1402S21MT9W-E					○			○	3N ~, 9 kW



Outdoor Unit							
3 phase							
Standard				with Heater			
Hydro Unit -Wall Mounted Type-	HWT- 801H8W-E	HWT- 1101H8W-E	HWT- 1401H8W-E	HWT- 801H8RW-E	HWT- 1101H8RW-E	HWT- 1401H8RW-E	Backup heater
HWT-1101XWHM3W-E	○	○		○	○		~, 3 kW
HWT-1101XWHM6W-E	○	○		○	○		~, 6 kW
HWT-1101XWHT6W-E	○	○		○	○		3N ~, 6 kW
HWT-1101XWHT9W-E	○	○		○	○		3N ~, 9 kW
HWT-1401XWHM3W-E			○			○	~, 3 kW
HWT-1401XWHM6W-E			○			○	~, 6 kW
HWT-1401XWHT6W-E			○			○	3N ~, 6 kW
HWT-1401XWHT9W-E			○			○	3N ~, 9 kW
Hydro Unit -All In One Type-	HWT- 801H8W-E	HWT- 1101H8W-E	HWT- 1401H8W-E	HWT- 801H8RW-E	HWT- 1101H8RW-E	HWT- 1401H8RW-E	Backup heater
HWT-1102S21SM3W-E	○	○		○	○		~, 3 kW
HWT-1102S21SM6W-E	○	○		○	○		~, 6 kW
HWT-1102S21ST6W-E	○	○		○	○		3N ~, 6 kW
HWT-1102S21ST9W-E	○	○		○	○		3N ~, 9 kW
HWT-1102S21MM3W-E	○	○		○	○		~, 3 kW
HWT-1102S21MM6W-E	○	○		○	○		~, 6 kW
HWT-1102S21MT6W-E	○	○		○	○		3N ~, 6 kW
HWT-1102S21MT9W-E	○	○		○	○		3N ~, 9 kW
HWT-1402S21SM3W-E			○			○	~, 3 kW
HWT-1402S21SM6W-E			○			○	~, 6 kW
HWT-1402S21ST6W-E			○			○	3N ~, 6 kW
HWT-1402S21ST9W-E			○			○	3N ~, 9 kW
HWT-1402S21MM3W-E			○			○	~, 3 kW
HWT-1402S21MM6W-E			○			○	~, 6 kW
HWT-1402S21MT6W-E			○			○	3N ~, 6 kW
HWT-1402S21MT9W-E			○			○	3N ~, 9 kW

		Hot water cylinder		
		HWS-1501 CSHM3-E	HWS-2101 CSHM3-E	HWS-3001 CSHM3-E
Hydro unit	HWT-601XWHM3W-E	○		
	HWT-601XWHM6W-E			
	HWT-601XWHT6W-E			
	HWT-1101XWHM3W-E			
	HWT-1101XWHM6W-E			
	HWT-1101XWHT6W-E			
	HWT-1101XWHT9W-E			
	HWT-1401XWHM3W-E			
	HWT-1401XWHM6W-E			
	HWT-1401XWHT6W-E			
	HWT-1401XWHT9W-E			

Options

Description	Model name
2nd remote controller	HWS-AMSU51-E
ESTIA 0-10 V Interface	HWS-IFAIP01U-E
Open Protocol Modbus interface	BMS-IFMB0UEW-E
Open Protocol KN Interface	BMS-IFKX0UEW-E
Wireless interface	HWS-IWF01
Recirculation Pipe kit	HWS-CPR01W-E

1-2. System specifications

Wall Mounted Type

Outdoor unit			HWT-401HW-E	HWT-601HW-E	HWT-801H(R)W-E	HWT-1101H(R)W-E	HWT-1401H(R)W-E
Hydro unit			HWT-601XWH**W-E		HWT-1101XWH**W-E		HWT-1401XWH**W-E
Rated Heating condition LWT=35°C dT=5deg TO=7°C	Capacity	kW	4.0	6.0	8.0	11.0	14.0
	Input	kW	0.77	1.25	1.54	2.39	3.0
	COP	W/W	5.20	4.80	5.19	4.60	4.60
	Rated water flow rate	L/min	11.6	17.3	23.0	32.1	40.5
Rated Cooling condition LWT=7°C dT=5deg TO=35°C	Capacity	kW	4.0	5.0	6.0	8.0	10.0
	Input	kW	1.16	1.52	1.88	2.86	4.08
	COP	W/W	3.45	3.30	3.20	2.80	2.45
	Rated water flow rate	L/min	11.5	14.3	16.7	22.7	28.6
Power supply			~ 220-240 V 50 Hz				
Maximum current		A	14.6	14.6	20.3	20.3	28.8

Outdoor unit			HWT-801H8(R)W-E	HWT-1101H8(R)W-E	HWT-1401H8(R)W-E
Hydro unit			HWT-1101XWH**W-E	HWT-1101XWH**W-E	HWT-1401XWH**W-E
Rated Heating condition LWT=35°C dT=5deg TO=7°C	Capacity	kW	8.0	11.0	14.0
	Input	kW	1.55	2.30	3.04
	COP	W/W	5.06	4.74	4.60
	Rated water flow rate	L/min	23.0	32.1	40.5
Rated Cooling condition LWT=7°C dT=5deg TO=35°C	Capacity	kW	6.0	8.0	10.0
	Input	kW	1.94	2.88	4.08
	COP	W/W	2.87	2.62	2.45
	Rated water flow rate	L/min	16.7	22.7	28.6
Power supply			3N ~ 380-415 V 50 Hz		
Maximum current		A	13	13	13

* Rated condition capacity and power input are the data at rated compressor operating frequency.

* Power input does not include water pump power.

* Capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (°C)

LWT : Leaving water temperature (°C)

dT : Delta temperature (deg)

Leaving water temperature - Return water temperature (Heating)

Return water temperature - Leaving water temperature (Cooling)

All In One Type

Outdoor unit			HWT-401HW-E	HWT-601HW-E	HWT-801H(R)W-E	HWT-1101H(R)W-E	HWT-1401H(R)W-E
Hydro unit			HWT-602S21***W-E		HWT-1102S21***W-E		HWT-1402S21***W-E
Rated Heating condition LWT=35°C dT=5deg TO=7°C	Capacity	kW	4.0	6.0	8.0	11.0	14.0
	Input	kW	0.77	1.25	1.54	2.39	3.0
	COP	W/W	5.20	4.80	5.19	4.60	4.60
	Rated water flow rate	L/min	11.6	17.3	23.0	32.1	40.5
Rated Cooling condition LWT=7°C dT=5deg TO=35°C	Capacity	kW	4.0	5.0	6.0	8.0	10.0
	Input	kW	1.16	1.52	1.88	2.86	4.08
	COP	W/W	3.45	3.30	3.20	2.80	2.45
	Rated water flow rate	L/min	11.5	14.3	16.7	22.7	28.6
Power supply			~ 220-240 V 50 Hz				
Maximum current		A	14.6	14.6	20.3	20.3	28.8

Outdoor unit			HWT-801H8(R)W-E	HWT-1101H8(R)W-E	HWT-1401H8(R)W-E
Hydro unit			HWT-1102S21***W-E	HWT-1102S21***W-E	HWT-1402S21***W-E
Rated Heating condition LWT=35°C dT=5deg TO=7°C	Capacity	kW	8.0	11.0	14.0
	Input	kW	1.55	2.30	3.04
	COP	W/W	5.06	4.74	4.60
	Rated water flow rate	L/min	23.0	32.1	40.5
Rated Cooling condition LWT=7°C dT=5deg TO=35°C	Capacity	kW	6.0	8.0	10.0
	Input	kW	1.94	2.88	4.08
	COP	W/W	2.87	2.62	2.45
	Rated water flow rate	L/min	16.7	22.7	28.6
Power supply			3N ~ 380-415 V 50 Hz		
Maximum current		A	13	13	13

* Rated condition capacity and power input are the data at rated compressor operating frequency.

* Power input does not include water pump power.

* Capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (°C)

LWT : Leaving water temperature (°C)

dT : Delta temperature (deg)

Leaving water temperature - Return water temperature (Heating)

Return water temperature - Leaving water temperature (Cooling)

2. HYDRO UNIT

2-1. Specifications

2-1-1. Hydro unit specifications

Wall Mounted Type

Hydro unit			HWT-601XWHM3W-E	HWT-601XWHM6W-E	HWT-601XWHT6W-E
Back up heater	back up heater	kW	3.0	6.0	6.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	26	13 (13A*2P)
Hot water cylinder heater*	Power supply		~ 220-240 V 50 Hz		
	Maximum current	A	12		
Appearance	Color		White		
	Material		Painted steel sheet		
Outer dimension	Height	mm	720		
	Width	mm	450		
	Depth	mm	235		
Unit weight		kg	27		
Packing dimension	Height	mm	846		
	Width	mm	534		
	Depth	mm	309		
Total weight	Unit and packing	kg	30		
Heat exchanger	Type		Brazen plate		
	Water volume	litres	0.9		
	Minimum flow rate	L/min	11		
Water pump	Power input (Max)	W	60		
	Delivery head	m	7.5		
Expansion vessel	Volume	litres	8		
	Initial pressure	Mpa (bar)	0.1 (1)		
Pressure relief valve	Operating pressure	Mpa (bar)	0.43 (4.3)		
Sound pressure level (Cooling/Heating)	MAX	dB(A)	29/29		
	Rated	dB(A)	29/29		
	Low noise	dB(A)	29/29		
Sound power level (Cooling/Heating)	MAX	dB(A)	40/40		
	Rated	dB(A)	40/40		
	Low noise	dB(A)	40/40		
Operation water Temp.	heating	°C	20-55		
	Cooling	°C	7-25		
Water pipe	Outlet	mm	25.4		
	Inlet	mm	25.4		
Refrigerant pipe	Gas	mm	12.7		
	Liquid	mm	6.4		
Drain port		mm	16.0 inner diameter for drain hose		
Note			* The electric heater, incorporated in the hot water cylinder, requires separate supply to hydro unit.		

Wall Mounted Type

Hydro unit			HWT-1101XWHM3W-E	HWT-1101XWHM6W-E	HWT-1101XWHT6W-E	HWT-1101XWHT9W-E
Back up heater	back up heater	kW	3.0	6.0	6.0	9.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	26	13 (13A*2P)	13 (13A*3P)
Hot water cylinder heater*	Power supply		~ 220-240 V 50 Hz			
	Maximum current	A	12			
Appearance	Color		White			
	Material		Painted steel sheet			
Outer dimension	Height	mm	720			
	Width	mm	450			
	Depth	mm	235			
Unit weight		kg	27			
Packing dimension	Height	mm	846			
	Width	mm	534			
	Depth	mm	309			
Total weight	Unit and packing	kg	30			
Heat exchanger	Type		Brazed plate			
	Water volume	litres	0.9			
	Minimum flow rate	L/min	14			
Water pump	Power input (Max)	W	60			
	Delivery head	m	7.5			
Expansion vessel	Volume	litres	8			
	Initial pressure	Mpa (bar)	0.1 (1)			
Pressure relief valve	Operating pressure	Mpa (bar)	0.43 (4.3)			
Sound pressure level (Cooling/Heating)	MAX	dB(A)	29/29			
	Rated	dB(A)	29/29			
	Low noise	dB(A)	29/29			
Sound power level (Cooling/Heating)	MAX	dB(A)	40/40			
	Rated	dB(A)	40/40			
	Low noise	dB(A)	40/40			
Operation water Temp.	heating	°C	20-65			
	Cooling	°C	7-25			
Water pipe	Outlet	mm	25.4			
	Inlet	mm	25.4			
Refrigerant pipe	Gas	mm	15.9			
	Liquid	mm	6.4			
Drain port		mm	16.0 inner diameter for drain hose			
Note			* The electric heater, incorporated in the hot water cylinder, requires separate supply to hydro unit.			

Wall Mounted Type

Hydro unit			HWT-1401XWHM3W-E	HWT-1401XWHM6W-E	HWT-1401XWHT6W-E	HWT-1401XWHT9W-E
Back up heater	back up heater	kW	3.0	6.0	6.0	9.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	26	13 (13A*2P)	13 (13A*3P)
Hot water cylinder heater*	Power supply		~ 220-240 V 50 Hz			
	Maximum current	A	12			
Appearance	Color		White			
	Material		Painted steel sheet			
Outer dimension	Height	mm	720			
	Width	mm	450			
	Depth	mm	235			
Unit weight		kg	28			
Packing dimension	Height	mm	846			
	Width	mm	534			
	Depth	mm	309			
Total weight	Unit and packing	kg	31			
Heat exchanger	Type		Brazed plate			
	Water volume	litres	1.3			
	Minimum flow rate	L/min	18			
Water pump	Power input (Max)	W	75			
	Delivery head	m	7.5			
Expansion vessel	Volume	litres	8			
	Initial pressure	Mpa (bar)	0.1 (1)			
Pressure relief valve	Operating pressure	Mpa (bar)	0.43 (4.3)			
Sound pressure level (Cooling/Heating)	MAX	dB(A)	35/35			
	Rated	dB(A)	33/33			
	Low noise	dB(A)	33/33			
Sound power level (Cooling/Heating)	MAX	dB(A)	45/45			
	Rated	dB(A)	43/43			
	Low noise	dB(A)	43/43			
Operation water Temp.	heating	°C	20-65			
	Cooling	°C	7-25			
Water pipe	Outlet	mm	R1"			
	Inlet	mm	R1"			
Refrigerant pipe	Gas	mm	15.9			
	Liquid	mm	6.4			
Drain port		mm	16.0 inner diameter for drain hose			
Note			* The electric heater, incorporated in the hot water cylinder, requires separate supply to hydro unit.			

All In One Type

Hydro unit			HWT-602S21SM3W-E	HWT-602S21SM6W-E	HWT-602S21ST6W-E
Back up heater	back up heater	kW	3.0	6.0	6.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	26	13 (13A*2P)
Appearance	Color		White		
	Material		Painted steel sheet		
Outer dimension	Height	mm	1700		
	Width	mm	595		
	Depth	mm	670		
Unit weight		kg	116		
Packing dimension	Height	mm	1700		
	Width	mm	595		
	Depth	mm	670		
Total weight	Unit and packing	kg	131		
Heat exchanger	Type		Brazen plate		
	Water volume	litres	0.9		
	Minimum flow rate	L/min	11		
Water pump	Power input (Max)	W	75		
	Delivery head	m	7.5		
Expansion vessel	Volume	litres	10		
	Initial pressure	Mpa (bar)	0.05 (0.5)		
Pressure relief valve	Operating pressure	Mpa (bar)	0.25 (2.5)		
Sound pressure level (Cooling/Heating)	MAX	dB(A)	24/24		
	Rated	dB(A)	24/24		
	Low noise	dB(A)	24/24		
Sound power level (Cooling/Heating)	MAX	dB(A)	40/40		
	Rated	dB(A)	40/40		
	Low noise	dB(A)	40/40		
Operation water Temp.	heating	°C	20-55		
	Cooling	°C	7-25		
Water pipe	Outlet	mm	R3/4"		
	Inlet	mm	R3/4"		
Refrigerant pipe	Gas	mm	12.7		
	Liquid	mm	6.4		
Drain port		mm	16.0 inner diameter for drain hose		
Note			-		

All In One Type

Hydro unit			HWT-602S21MM3W-E	HWT-602S21MM6W-E	HWT-602S21MT6W-E
Back up heater	back up heater	kW	3.0	6.0	6.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	26	13 (13A*2P)
Appearance	Color		White		
	Material		Painted steel sheet		
Outer dimension	Height	mm	1700		
	Width	mm	595		
	Depth	mm	670		
Unit weight		kg	122		
Packing dimension	Height	mm	1700		
	Width	mm	595		
	Depth	mm	670		
Total weight	Unit and packing	kg	137		
Heat exchanger	Type		Brazen plate		
	Water volume	litres	0.9		
	Minimum flow rate	L/min	11		
Water pump	Power input (Max)	W	75 × 2		
	Delivery head	m	7.5		
Expansion vessel	Volume	litres	10		
	Initial pressure	Mpa (bar)	0.05 (0.5)		
Pressure relief valve	Operating pressure	Mpa (bar)	0.25 (2.5)		
Sound pressure level (Cooling/Heating)	MAX	dB(A)	30/30		
	Rated	dB(A)	30/30		
	Low noise	dB(A)	30/30		
Sound power level (Cooling/Heating)	MAX	dB(A)	45/45		
	Rated	dB(A)	45/45		
	Low noise	dB(A)	45/45		
Operation water Temp.	heating	°C	20-55		
	Cooling	°C	7-25		
Water pipe	Outlet	mm	R3/4"		
	Inlet	mm	R3/4"		
Refrigerant pipe	Gas	mm	12.7		
	Liquid	mm	6.4		
Drain port		mm	16.0 inner diameter for drain hose		
Note			-		

All In One Type

Hydro unit			HWT-1102S21SM3W-E	HWT-1102S21SM6W-E	HWT-1102S21ST6W-E	HWT-1102S21ST9W-E
Back up heater	back up heater	kW	3.0	6.0	6.0	9.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	13 (13A*2P)	13 (13A*2P)	13 (13A*3P)
Appearance	Color		White			
	Material		Painted steel sheet			
Outer dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Unit weight		kg	116			
Packing dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Total weight	Unit and packing	kg	131			
Heat exchanger	Type		Brazed plate			
	Water volume	litres	0.9			
	Minimum flow rate	L/min	14			
Water pump	Power input (Max)	W	75			
	Delivery head	m	7.5			
Expansion vessel	Volume	litres	10			
	Initial pressure	Mpa (bar)	0.05 (0.5)			
Pressure relief valve	Operating pressure	Mpa (bar)	0.25 (2.5)			
Sound pressure level (Cooling/Heating)	MAX	dB(A)	24/24			
	Rated	dB(A)	24/24			
	Low noise	dB(A)	24/24			
Sound power level (Cooling/Heating)	MAX	dB(A)	40/40			
	Rated	dB(A)	40/40			
	Low noise	dB(A)	40/40			
Operation water Temp.	heating	°C	20-65			
	Cooling	°C	7-25			
Water pipe	Outlet	mm	R3/4"			
	Inlet	mm	R3/4"			
Refrigerant pipe	Gas	mm	15.9			
	Liquid	mm	6.4			
Drain port		mm	16.0 inner diameter for drain hose			
Note			-			

All In One Type

Hydro unit			HWT-1102S21MM3W-E	HWT-1102S21MT6W-E	HWT-1102S21MT6W-E	HWT-1102S21MT9W-E
Back up heater	back up heater	kW	3.0	6.0	6.0	9.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	13 (13A*2P)	13 (13A*2P)	13 (13A*3P)
Appearance	Color		White			
	Material		Painted steel sheet			
Outer dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Unit weight		kg	122			123
Packing dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Total weight	Unit and packing	kg	131			
Heat exchanger	Type		Brazed plate			
	Water volume	litres	0.9			
	Minimum flow rate	L/min	14			
Water pump	Power input (Max)	W	75 × 2			
	Delivery head	m	7.5			
Expansion vessel	Volume	litres	10			
	Initial pressure	Mpa (bar)	0.05 (0.5)			
Pressure relief valve	Operating pressure	Mpa (bar)	0.25 (2.5)			
Sound pressure level (Cooling/Heating)	MAX	dB(A)	30/30			
	Rated	dB(A)	30/30			
	Low noise	dB(A)	30/30			
Sound power level (Cooling/Heating)	MAX	dB(A)	45/45			
	Rated	dB(A)	45/45			
	Low noise	dB(A)	45/45			
Operation water Temp.	heating	°C	20-65			
	Cooling	°C	7-25			
Water pipe	Outlet	mm	R3/4"			
	Inlet	mm	R3/4"			
Refrigerant pipe	Gas	mm	15.9			
	Liquid	mm	6.4			
Drain port		mm	16.0 inner diameter for drain hose			
Note			-			

All In One Type

Hydro unit			HWT-1402S21SM3W-E	HWT-1402S21SM6W-E	HWT-1402S21ST6W-E	HWT-1402S21ST9W-E
Back up heater	back up heater	kW	3.0	6.0	6.0	9.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	13 (13A*2P)	13 (13A*2P)	13 (13A*3P)
Appearance	Color		White			
	Material		Painted steel sheet			
Outer dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Unit weight		kg	117			
Packing dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Total weight	Unit and packing	kg	132			
Heat exchanger	Type		Brazed plate			
	Water volume	litres	1.3			
	Minimum flow rate	L/min	18			
Water pump	Power input (Max)	W	130			
	Delivery head	m	10.5			
Expansion vessel	Volume	litres	10			
	Initial pressure	Mpa (bar)	0.05 (0.5)			
Pressure relief valve	Operating pressure	Mpa (bar)	0.25 (2.5)			
Sound pressure level (Cooling/Heating)	MAX	dB(A)	24/24			
	Rated	dB(A)	24/24			
	Low noise	dB(A)	24/24			
Sound power level (Cooling/Heating)	MAX	dB(A)	40/40			
	Rated	dB(A)	40/40			
	Low noise	dB(A)	40/40			
Operation water Temp.	heating	°C	20-65			
	Cooling	°C	7-25			
Water pipe	Outlet	mm	R3/4"			
	Inlet	mm	R3/4"			
Refrigerant pipe	Gas	mm	15.9			
	Liquid	mm	6.4			
Drain port		mm	16.0 inner diameter for drain hose			
Note			-			

All In One Type

Hydro unit			HWT-1402S21MM3W-E	HWT-1402S21MT6W-E	HWT-1402S21MT6W-E	HWT-1402S21MT9W-E
Back up heater	back up heater	kW	3.0	6.0	6.0	9.0
	Power supply		~ 220-240 V 50 Hz	~ 220-240 V 50 Hz	3N ~ 380-415 V 50 Hz	3N ~ 380-415 V 50 Hz
	Maximum current	A	13	13 (13A*2P)	13 (13A*2P)	13 (13A*3P)
Appearance	Color		White			
	Material		Painted steel sheet			
Outer dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Unit weight		kg	123			124
Packing dimension	Height	mm	1700			
	Width	mm	595			
	Depth	mm	670			
Total weight		kg	132			139
Heat exchanger	Type		Brazed plate			
	Water volume	litres	1.3			
	Minimum flow rate	L/min	18			
Water pump	Power input (Max)	W	130 (Pump for 1zone), 75 (Pump for 2zone)			
	Delivery head	m	10.5 (Pump for 1zone), 7.5 (Pump for 2zone)			
Expansion vessel	Volume	litres	10			
	Initial pressure	Mpa (bar)	0.05 (0.5)			
Pressure relief valve	Operating pressure	Mpa (bar)	0.25 (2.5)			
Sound pressure level (Cooling/Heating)	MAX	dB(A)	24/24			
	Rated	dB(A)	24/24			
	Low noise	dB(A)	24/24			
Sound power level (Cooling/Heating)	MAX	dB(A)	40/40			
	Rated	dB(A)	40/40			
	Low noise	dB(A)	40/40			
Operation water Temp.	heating	°C	20-65			
	Cooling	°C	7-25			
Water pipe	Outlet	mm	R3/4"			
	Inlet	mm	R3/4"			
Refrigerant pipe	Gas	mm	15.9			
	Liquid	mm	6.4			
Drain port		mm	16.0 inner diameter for drain hose			
Note			-			

2-1-2. Electrical supply / cable specifications

Wall Mounted Type

▼ Wiring specifications

Description		Model name HWT-	POWER SUPPLY	Maximum current	Installation fuse rating	Power wire	Connection destination	
Outdoor Unit power	Power input	1401H(R)W-E	220-240 V ~ 50 Hz	28.8 A	32 A	4 mm ² or more	Ⓐ, Ⓒ	
		1101H(R)W-E	220-240 V ~ 50 Hz	20.3 A	25 A	2.5 mm ² or more		
		801H(R)W-E	220-240 V ~ 50 Hz	20.3 A	25 A	2.5 mm ² or more		
		601HW-E	220-240 V ~ 50 Hz	14.6 A	16 A	1.5 mm ² or more		
		401HW-E	220-240 V ~ 50 Hz	14.6 A	16 A	1.5 mm ² or more	Ⓐ, Ⓒ, Ⓓ, Ⓔ	
		801H8(R)W-E	380-415 V 3N ~ 50 Hz	13.0 A	16 A	2.5 mm ² or more		
		1101H8(R)W-E	380-415 V 3N ~ 50 Hz	13.0 A	16 A	2.5 mm ² or more		
		1401H8(R)W-E	380-415 V 3N ~ 50 Hz	13.0 A	16 A	2.5 mm ² or more		
Hydro inlet heater power	Power input for backup heater	1401XWHM3W-E	220-240 V ~ 50 Hz	13 A	16 A	1.5 mm ² or more	Ⓐ, Ⓒ	TB03
		1401XWHM6W-E	220-240 V ~ 50 Hz	26 A	32 A	6 mm ² or more		
		1401XWHT6W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 2P)	16 A	1.5 mm ² or more	Ⓐ, Ⓒ, Ⓓ, Ⓔ	
		1401XWHT9W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 3P)	16 A	1.5 mm ² or more		
		1101XWHM3W-E	220-240 V ~ 50 Hz	13 A	16 A	1.5 mm ² or more	Ⓐ, Ⓒ	
		1101XWHM6W-E	220-240 V ~ 50 Hz	26 A	32 A	6 mm ² or more	Ⓐ, Ⓒ	
		1101XWHT6W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 2P)	16 A	1.5 mm ² or more	Ⓐ, Ⓒ, Ⓓ, Ⓔ	
		1101XWHT9W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 3P)	16 A	1.5 mm ² or more		
		601XWHM3W-E	220-240 V ~ 50 Hz	13 A	16 A	1.5 mm ² or more	Ⓐ, Ⓒ	
		601XWHM6W-E	220-240 V ~ 50 Hz	26 A	32 A	6 mm ² or more	Ⓐ, Ⓒ	
		601XWHT6W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 2P)	16 A	1.5 mm ² or more	Ⓐ, Ⓒ, Ⓓ, Ⓔ	
	Power input for cylinder heater		220-240 V ~ 50 Hz	12 A	16 A	1.5 mm ² or more	Ⓐ, Ⓒ	
Outdoor-Hydro Unit		Connection				1.5 mm ² or more	①, ②, ③	TB01
Hydro-Cylinder		Connection				1.5 mm ² or more	①, ②	TB02

▼ Wiring specifications (control line)

Description	Line spec	Maximum current	Maximum length	Power wire	Connection destination
3-way valve control	2 line or 3 line	100 mA	12 m	0.75 mm ² or more	⑧, ⑨, ⑩ (CN23)
2-way valve control	2 line	100 mA	12 m	0.75 mm ² or more	③, ④ (CN23)
Mixing valve control	3 line	100 mA	12 m	0.75 mm ² or more	⑧, ⑨, ⑩ (CN22)
2-zone thermo sensor	2 line	100 mA	5 m	0.75 mm ² or more	③, ④ (CN20)
Cylinder thermo sensor	2+GND(shielded wire)	100 mA	5 m	0.75 mm ² or more	①, ② (CN20)
Second remote controller	2 line	50 mA	50 m	0.5 mm ² or more	(TB04)
Group control (total)	2 line	50 mA	50 m	0.5 mm ² or more	(TB04)
Open protocol interface	2 line	100 mA	50 m	0.5 mm ² or more	(TB04)

▼ Control parts specifications

	Power	Maximum current	Type
Motorized 3-way valve (for hot water)	AC 230 V	100 mA	Default: 2-wire spring return valve or 3 wire SPST valve Note: 3 wire SPDT valve can be used by changing DN 6B4.
Motorized 2-way valve (for cooling)	AC 230 V	100 mA	spring return type (normally open)
Motorized mixing valve (for 2-zone)	AC 230 V	100 mA	Default: Drive time = 60sec to 90° Note: 3 wire SPST or SPDT valves, with drive times between 30 and 240 seconds, can be used. Valve drive time can be changed using DN 0C

▼ Output line specifications

Description	Output	Maximum current	Max voltage	Maximum length	
External pump No.1	AC230 V	1 A	–	12 m	
External boost heater	AC230 V	1 A	–	12 m	Output as required when outdoor air temperature is -20 °C or less
Digital outputs from CN22	Non-voltage contacts	0.5 A	AC230 V	12 m	
		1 A	DC24 V	12 m	

▼ Input line specifications

Description	Input	Maximum length
Digital inputs to CN21	Non-voltage	12 m

All In One Type

▼ Wiring specifications

Description		Model name HWT-	POWER SUPPLY	Maximum current	Installation fuse rating	Power wire	Connection destination	
Outdoor Unit power	Power input	1401H(R)W-E	220-240 V ~ 50 Hz	28.8 A	32 A	4 mm ² or more	(L), (N)	
		1101H(R)W-E	220-240 V ~ 50 Hz	20.3 A	25 A	2.5 mm ² or more	(L), (N)	
		801H(R)W-E	220-240 V ~ 50 Hz	20.3 A	25 A	2.5 mm ² or more		
		601HW-E	220-240 V ~ 50 Hz	14.6 A	16 A	1.5 mm ² or more		
		401HW-E	220-240 V ~ 50 Hz	14.6 A	16 A	1.5 mm ² or more		
		801H8(R)W-E	380-415 V 3N~ 50 Hz	13.0 A	16 A	2.5 mm ² or more	(L1), (L2), (L3), (N)	
		1101H8(R)W-E	380-415 V 3N~ 50 Hz	13.0 A	16 A	2.5 mm ² or more		
		1401H8(R)W-E	380-415 V 3N~ 50 Hz	13.0 A	16 A	2.5 mm ² or more		
Hydro inlet heater power	Power input for backup heater	1402S21SM3W-E	220-240 V ~ 50 Hz	13 A	16 A	1.5 mm ² or more	(L), (N)	
		1402S21MM3W-E						
		1402S21SM6W-E	220-240 V ~ 50 Hz	26 A	32 A	6 mm ² or more	(L), (N)	
		1402S21MM6W-E						
		1402S21ST6W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 2P)	16 A	1.5 mm ² or more	(L1), (L2), (L3), (N)	
		1402S21MT6W-E						
		1402S21ST9W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 3P)	16 A	1.5 mm ² or more	(L1), (L2), (L3), (N)	
		1402S21MT9W-E						
		1102S21SM3W-E	220-240 V ~ 50 Hz	13 A	16 A	1.5 mm ² or more	(L), (N)	
		1102S21MM3W-E						
		1102S21SM6W-E	220-240 V ~ 50 Hz	26 A	32 A	6 mm ² or more	(L), (N)	
		1102S21MM6W-E						
		1102S21ST6W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 2P)	16 A	1.5 mm ² or more	(L1), (L2), (L3), (N)	
		1102S21MT6W-E						
		1102S21ST9W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 3P)	16 A	1.5 mm ² or more	(L1), (L2), (L3), (N)	
		1102S21MT9W-E						
		602S21SM3W-E	220-240 V ~ 50 Hz	13 A	16 A	1.5 mm ² or more	(L), (N)	
		602S21MM3W-E						
602S21SM6W-E	220-240 V ~ 50 Hz	26 A	32 A	6 mm ² or more	(L), (N)			
602S21MM6W-E								
602S21ST6W-E	380-415 V 3N ~ 50 Hz	13 A (13 A x 2P)	16 A	1.5 mm ² or more	(L1), (L2), (L3), (N)			
602S21MT6W-E								

TB03

▼ Wiring specifications (control line)

Description	Line spec	Maximum current	Maximum length	Power wire	Connection destination
2-way valve control	2 line	100 mA	12 m	0.75 mm ² or more	③, ④ (CN23)
Second remote controller	2 line	50 mA	50 m	0.5 mm ² or more	(TB04)
Group control (total)	2 line	50 mA	50 m	0.5 mm ² or more	(TB04)
Open protocol interface	2 line	100 mA	50 m	0.5 mm ² or more	(TB04)

▼ Control parts specifications

	Power	Maximum current	Type
Motorized 2-way valve (for cooling)	AC 230 V	100 mA	spring return type (normally open)

▼ Output line specifications

Description	Output	Maximum current	Max voltage	Maximum length	
External boost heater	AC230 V	1 A	–	12 m	Output as required when outdoor air temperature is -20 °C or less
Digital outputs from CN22	Non-voltage contacts	0.5 A	AC230 V	12 m	
		1 A	DC24 V	12 m	


▼ Input line specifications

Description	Input	Maximum length
Digital inputs to CN21	Non-voltage	12 m

2-2. Dimension

Hydro unit - Wall Mounted Type


HWT-601XWHM3W-E, HWT-601XWHM6W-E, HWT-601XWHT6W-E
 HWT-1101XWHM3W-E, HWT-1101XWHM6W-E, HWT-1101XWHT6W-E
 HWT-1101XWHT9W-E, HWT-1401XWHM3W-E, HWT-1401XWHM6W-E
 HWT-1401XWHT6W-E, HWT-1401XWHT9W-E

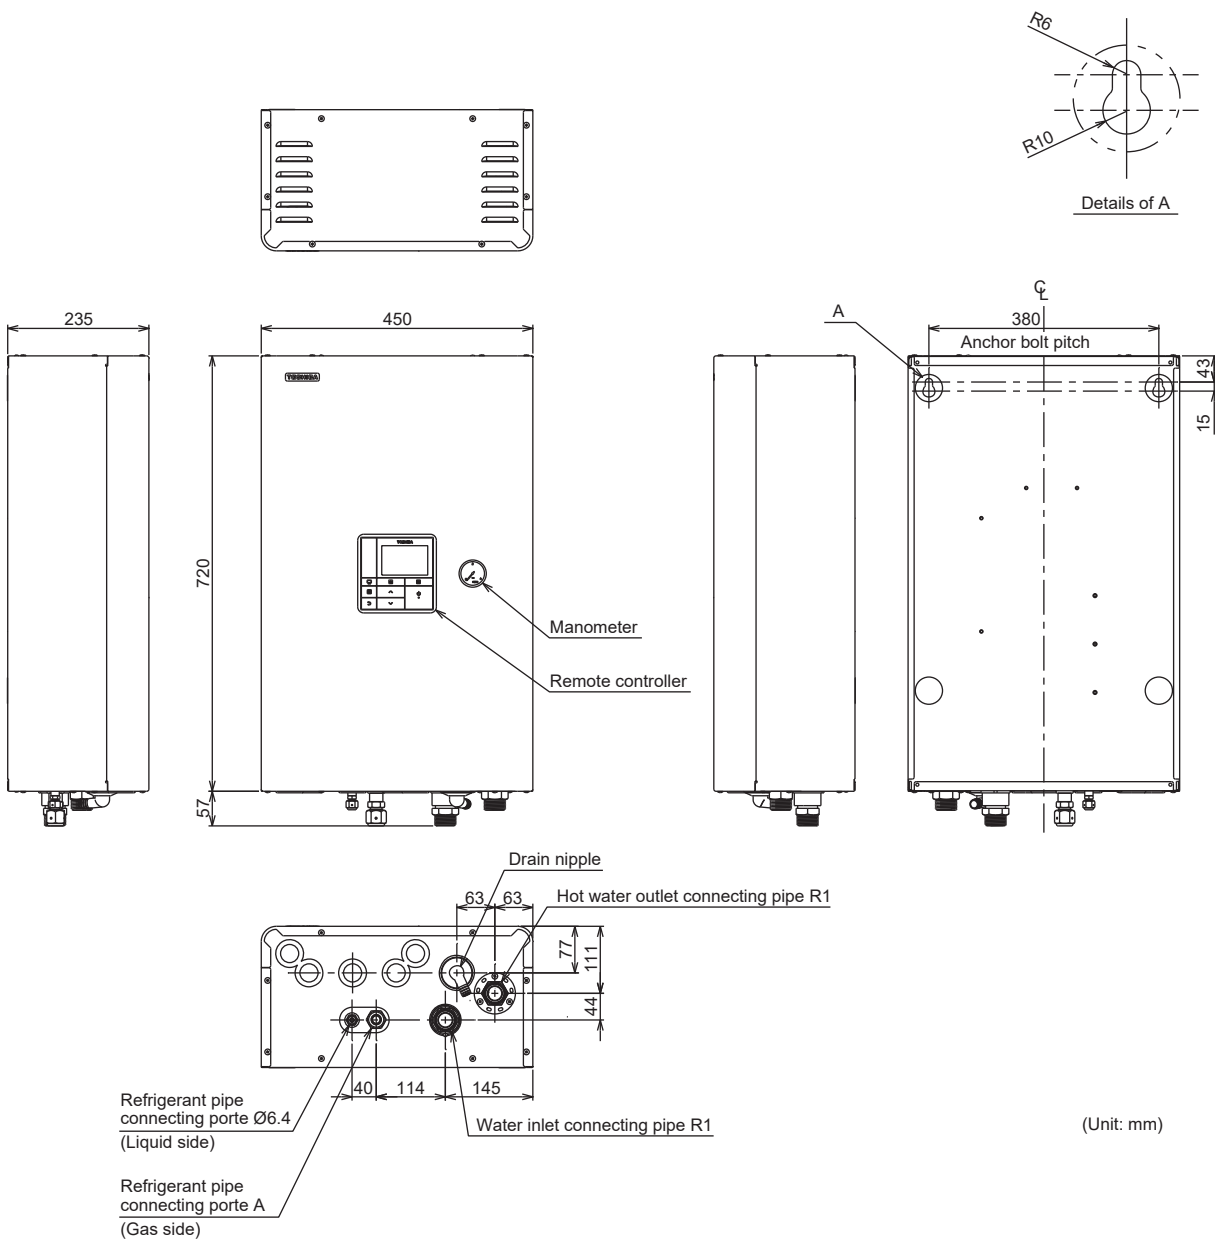

Model name	A
HWT-601	Ø12.7
HWT-1101	Ø15.9
HWT-1401	Ø15.9


Hydro unit - All In One Type

HWT-602S21SM3W-E, HWT-602S21SM6W-E, HWT-602S21ST6W-E, HWT-602S21MM3W-E
 HWT-602S21MM6W-E, HWT-602S21MT6W-E, HWT-1102S21SM3W-E, HWT-1102S21SM6W-E
 HWT-1102S21ST6W-E, HWT-1102S21ST9W-E, HWT-1102S21MM3W-E, HWT-1102S21MM6W-E
 HWT-1102S21MT6W-E, HWT-1102S21MT9W-E, HWT-1402S21SM3W-E, HWT-1402S21SM6W-E
 HWT-1402S21ST6W-E, HWT-1402S21ST9W-E, HWT-1402S21MM3W-E, HWT-1402S21MM6W-E
 HWT-1402S21MT6W-E, HWT-1402S21MT9W-E

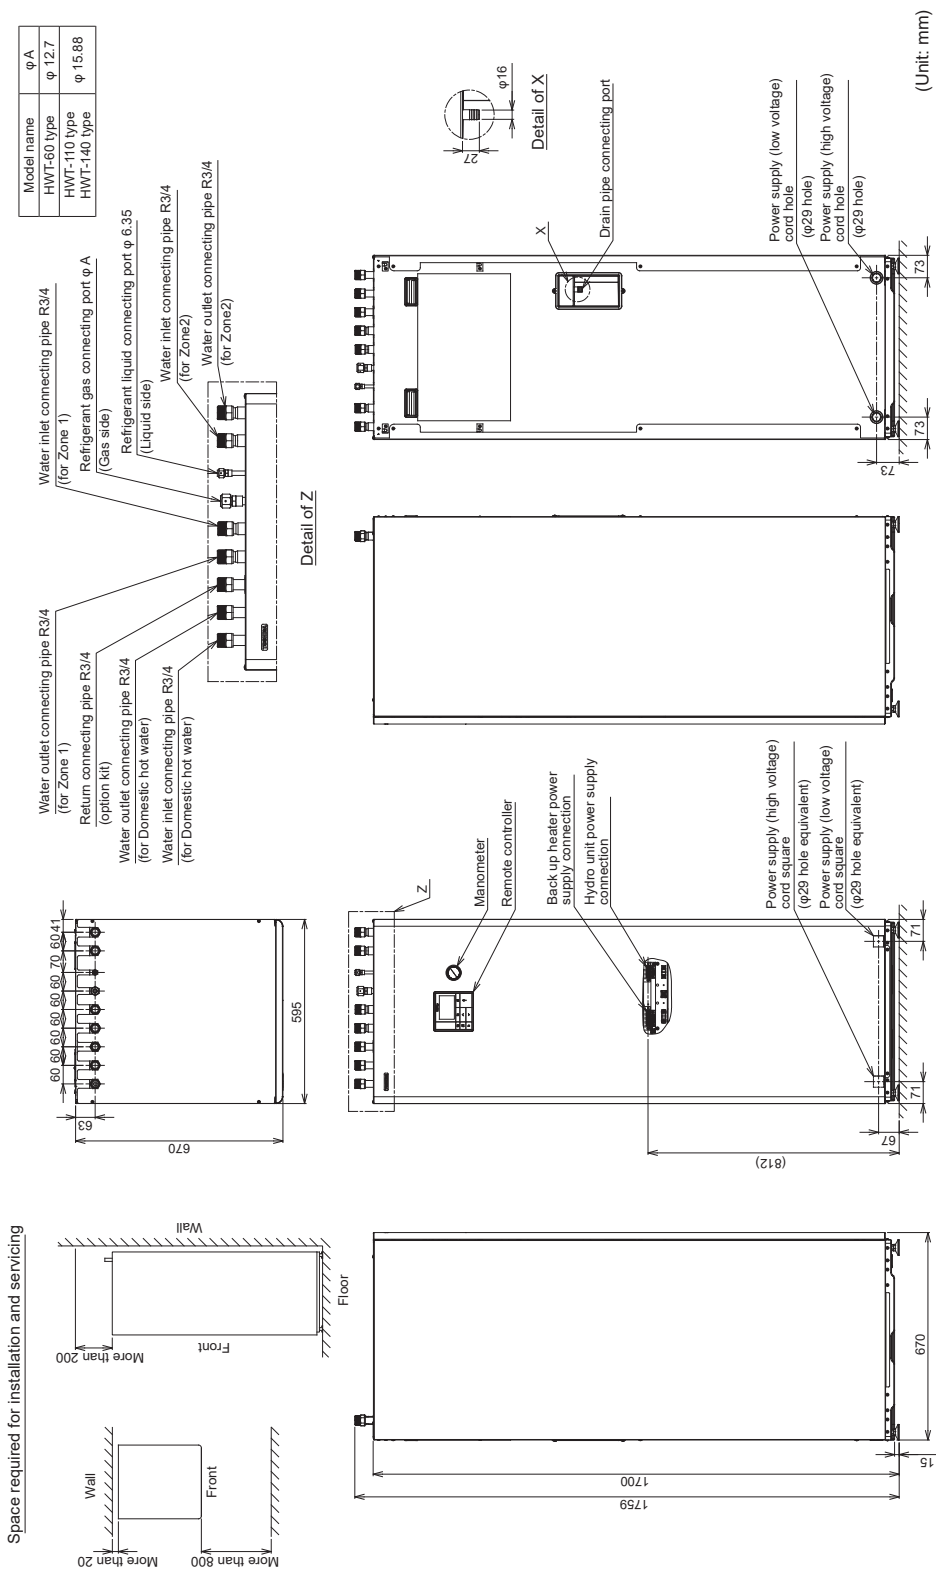

2-3. Piping Diagram


Water system diagram - Wall Mounted Type

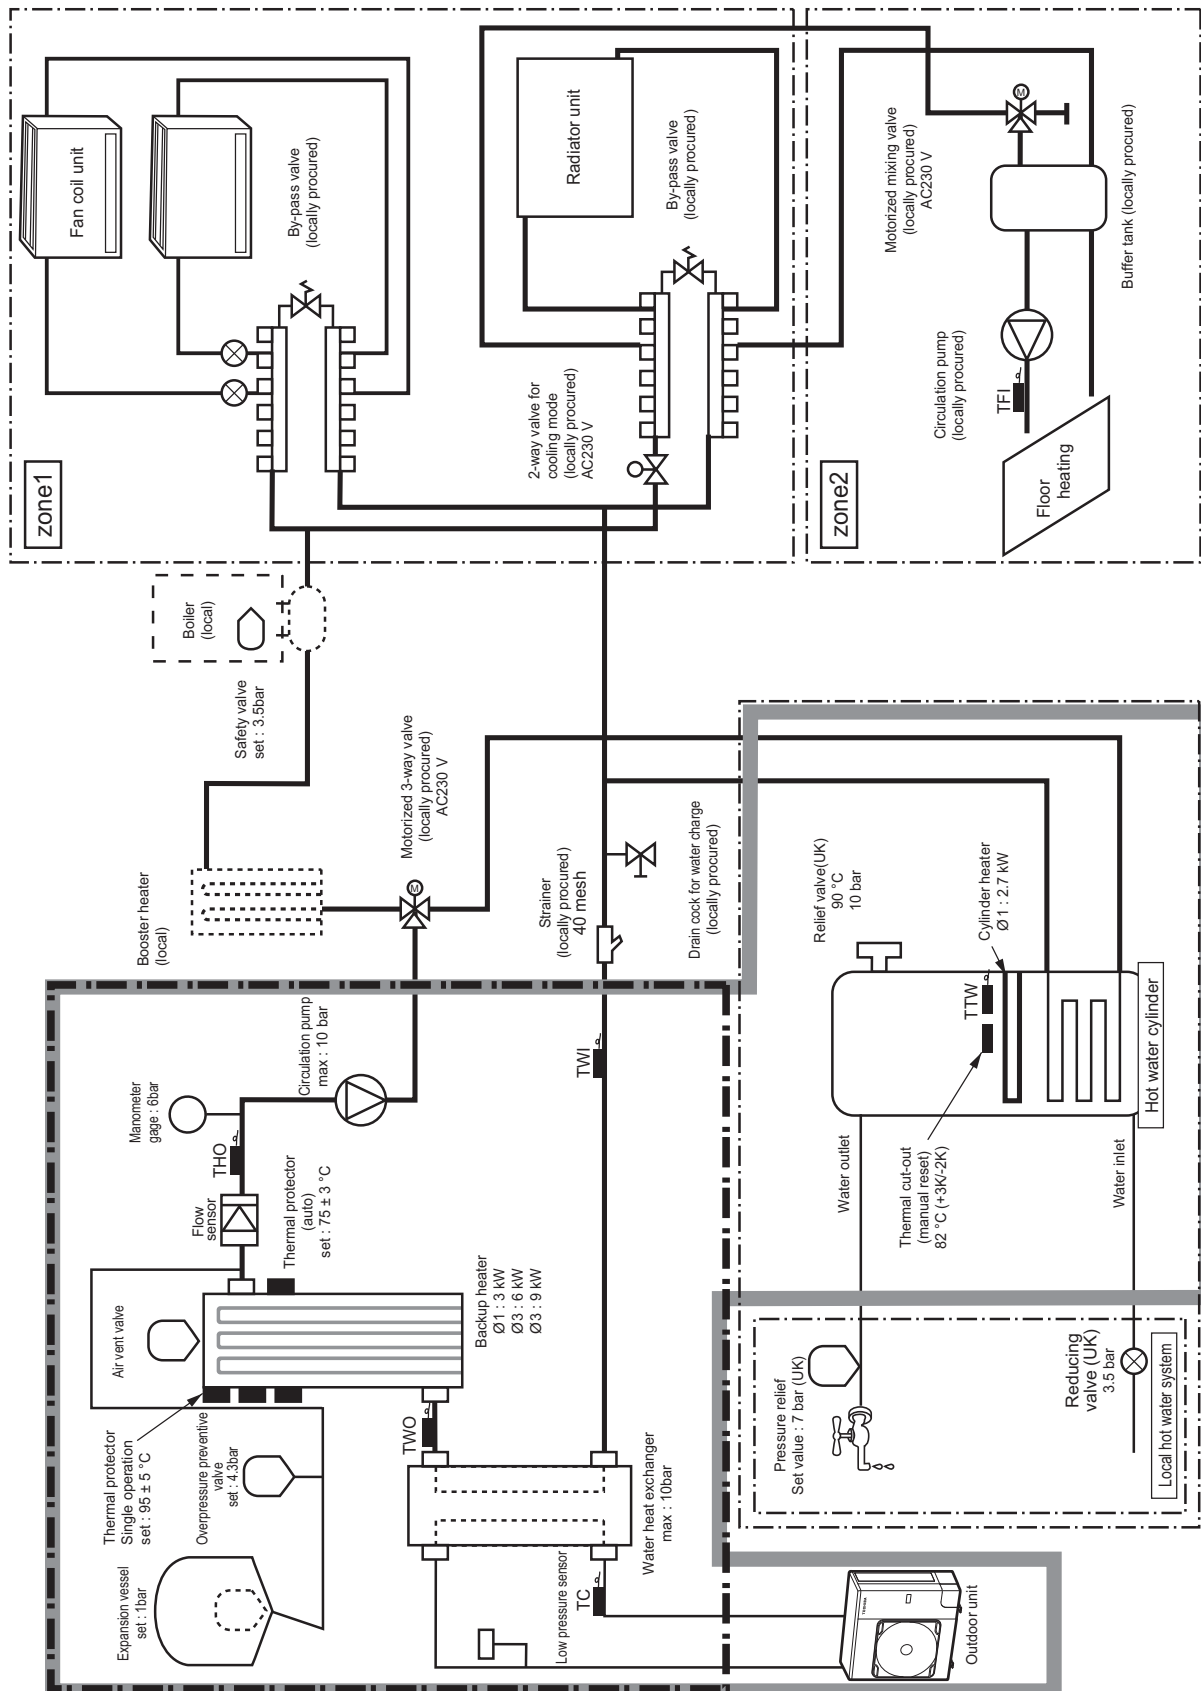

Refrigeration cycle system diagram - Wall Mounted Type

HWT-601XWH**W-E


HWT-401HW-E, HWT-601HW-E

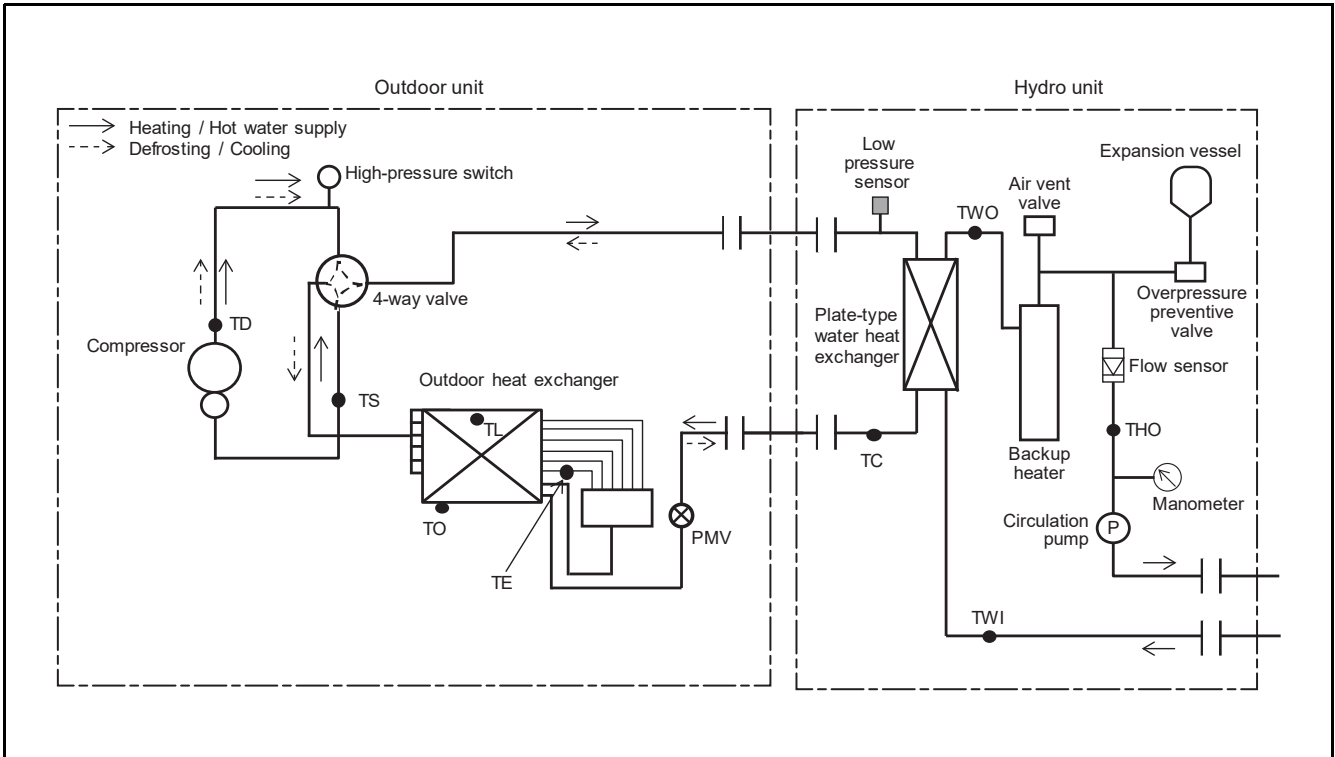

HWT-1101XWH**W-E, HWT-1401XWH**W-E


HWT-801H(R)W-E, HWT-1101H(R)W-E, HWT-1401H(R)W-E

HWT-801H8(R)W-E, HWT-1101H8(R)W-E, HWT-1401H8(R)W-E

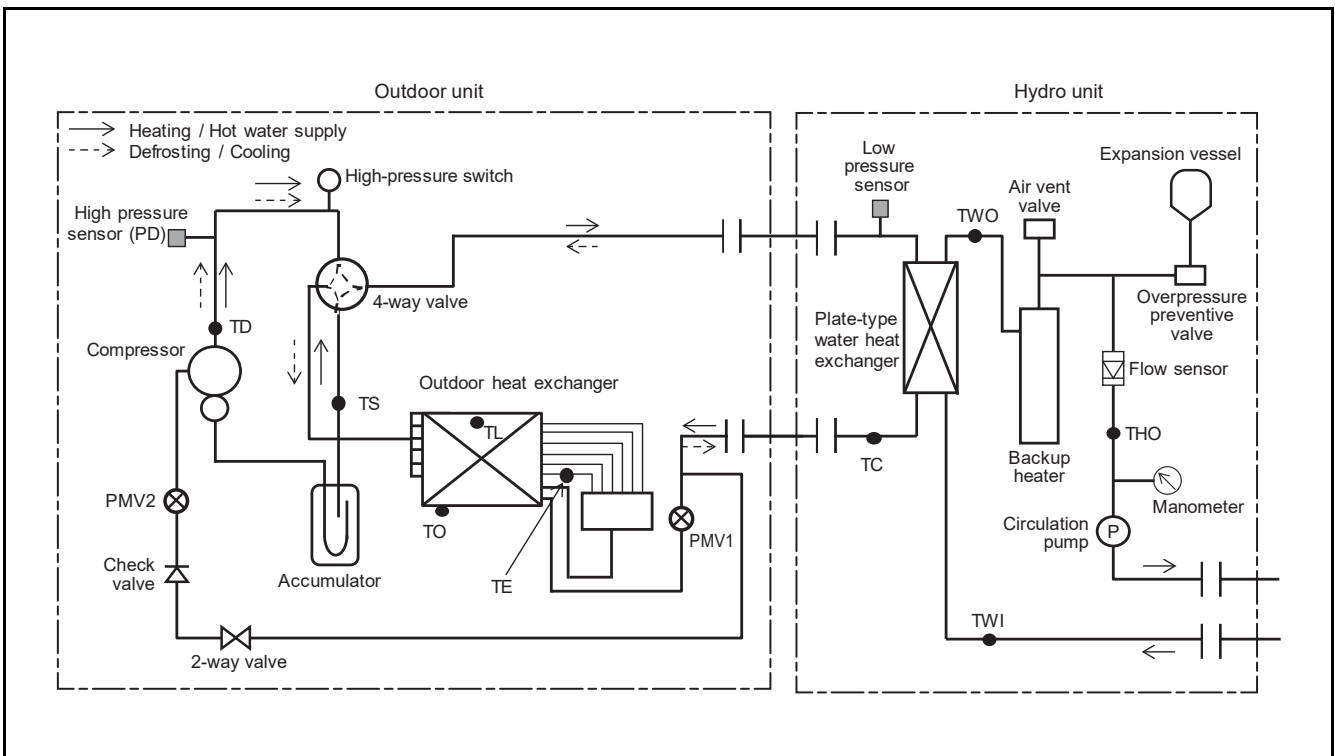

2


Water system diagram - All In One Type

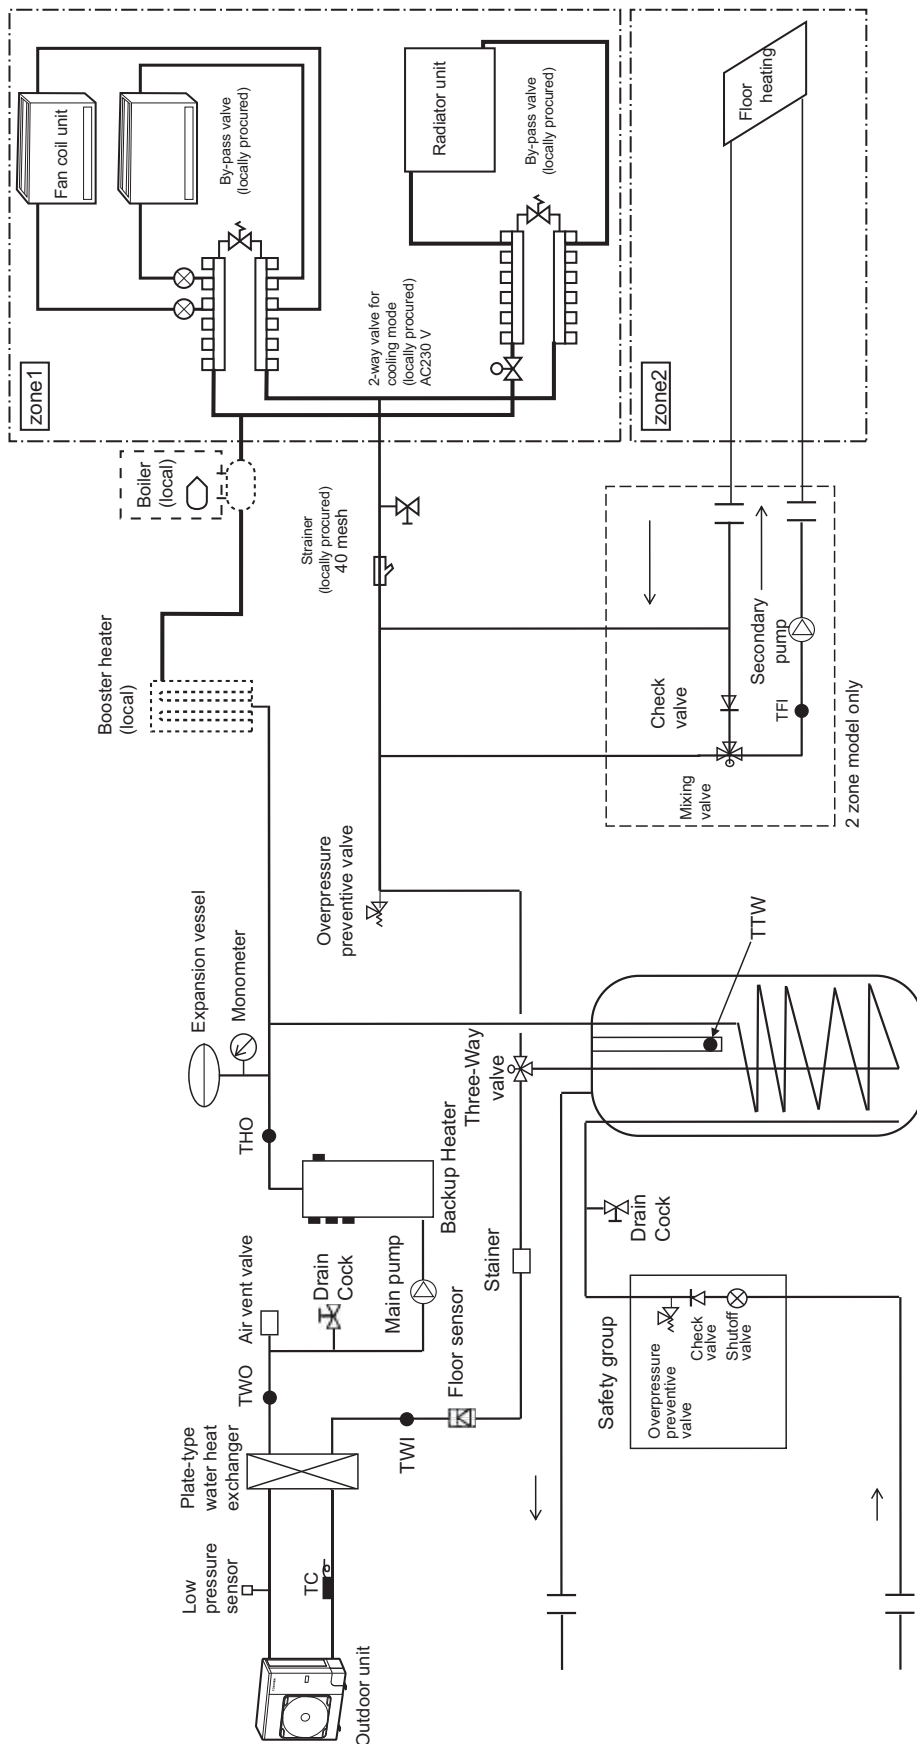

Refrigeration cycle system diagram - All In One Type

HWT-602S21***W-E

HWT-401HW-E, HWT-601HW-E

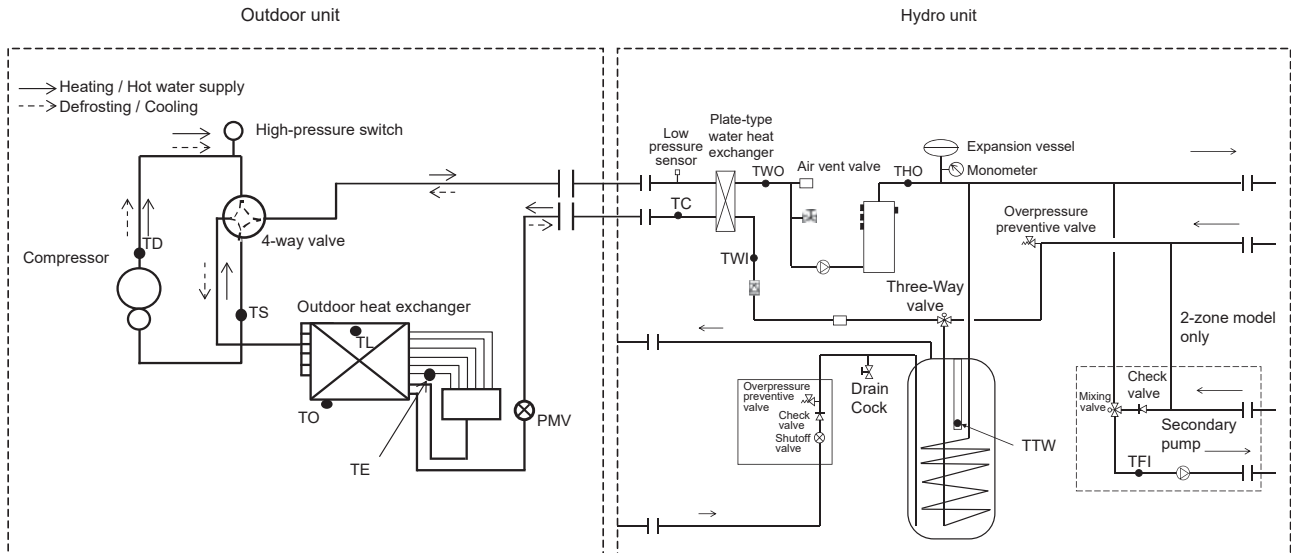


HWT-1102S21***W-E, HWT-1402S21***W-E

HWT-801H(R)W-E, HWT-1101H(R)W-E, HWT-1401H(R)W-E

HWT-801H8(R)W-E, HWT-1101H8(R)W-E, HWT-1401H8(R)W-E

2

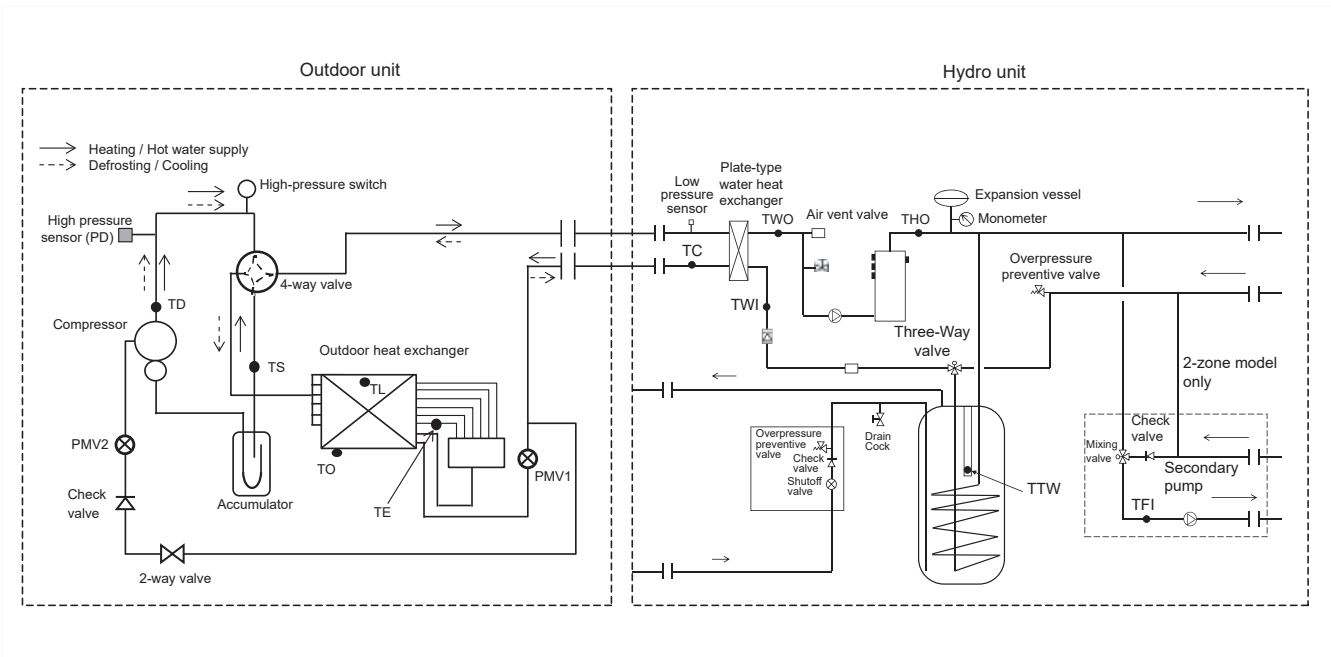


2-4. Wiring Diagram

2-4-1. Wiring Diagram

Hydro unit - Wall Mounted Type

HWT-601XWHM3W-E, HWT-601XWHM6W-E, HWT-601XWHT6W-E
 HWT-1101XWHM3W-E, HWT-1101XWHM6W-E, HWT-1101XWHT6W-E
 HWT-1101XWHT9W-E, HWT-1401XWHM3W-E, HWT-1401XWHM6W-E
 HWT-1401XWHT6W-E, HWT-1401XWHT9W-E

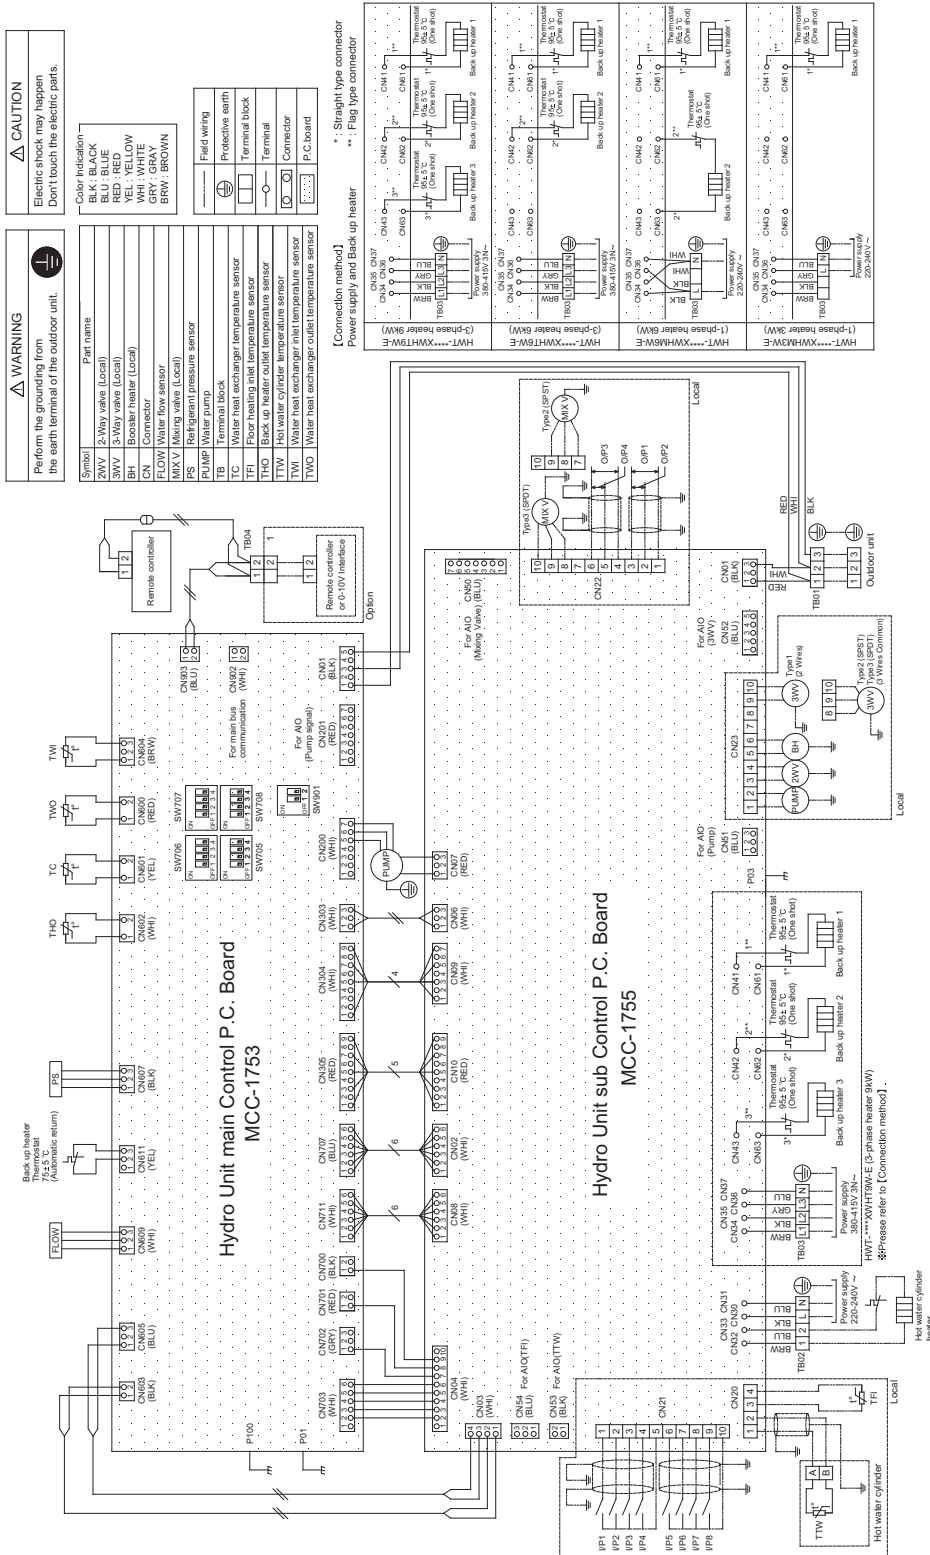


Hydro unit - All In One Type

HWT-602S21SM3W-E, HWT-602S21SM6W-E, HWT-602S21ST6W-E
 HWT-1102S21SM3W-E, HWT-1102S21SM6W-E, HWT-1102S21ST6W-E
 HWT-1102S21ST9W-E, HWT-1102S21MM3W-E, HWT-1102S21MM6W-E
 HWT-1102S21MT6W-E, HWT-1102S21MT9W-E

Be sure to turn off all main power supply switches or the circuit breaker before starting any electrical work.

⚠ WARNING	⚠ CAUTION
Perform the grounding from the earth terminal of the outdoor unit.	Electric shock may happen. Don't touch the electric parts.

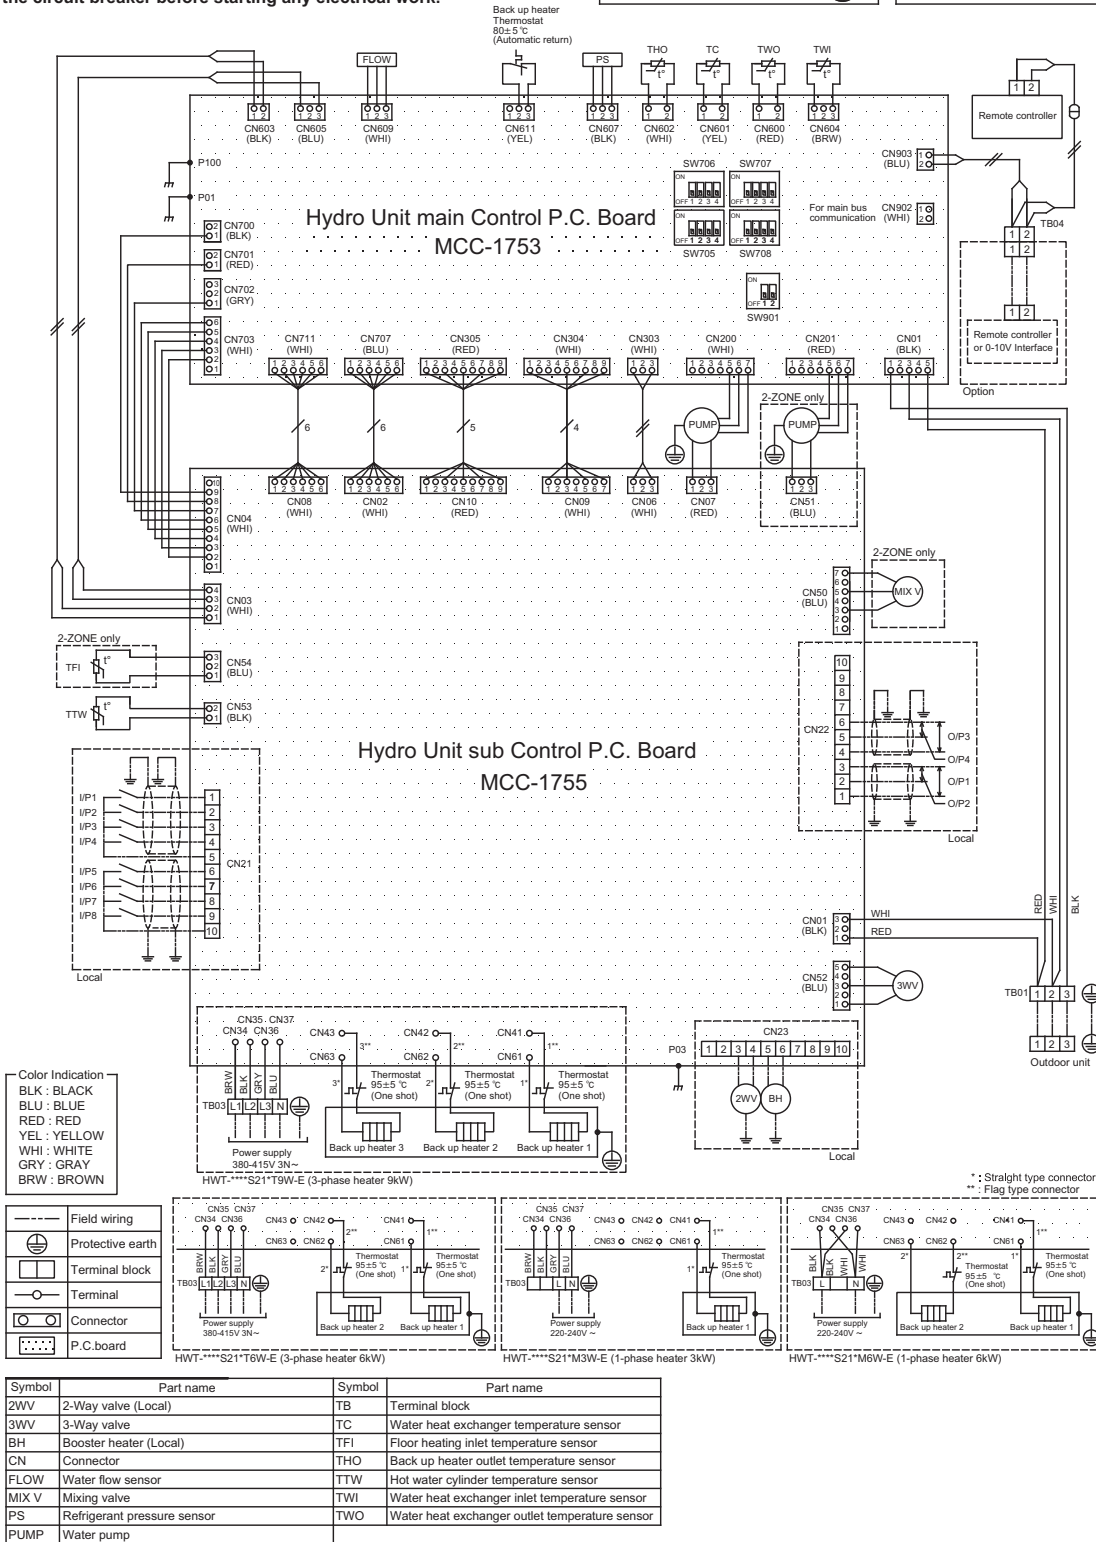


Hydro unit - All In One Type

HWT-602S21MM3W-E, HWT-602S21MM6W-E, HWT-602S21MT6W-E

Be sure to turn off all main power supply switches or the circuit breaker before starting any electrical work.




⚠ WARNING Perform the grounding from the earth terminal of the outdoor unit.	⚠ CAUTION Electric shock may happen. Don't touch the electric parts.
--	--

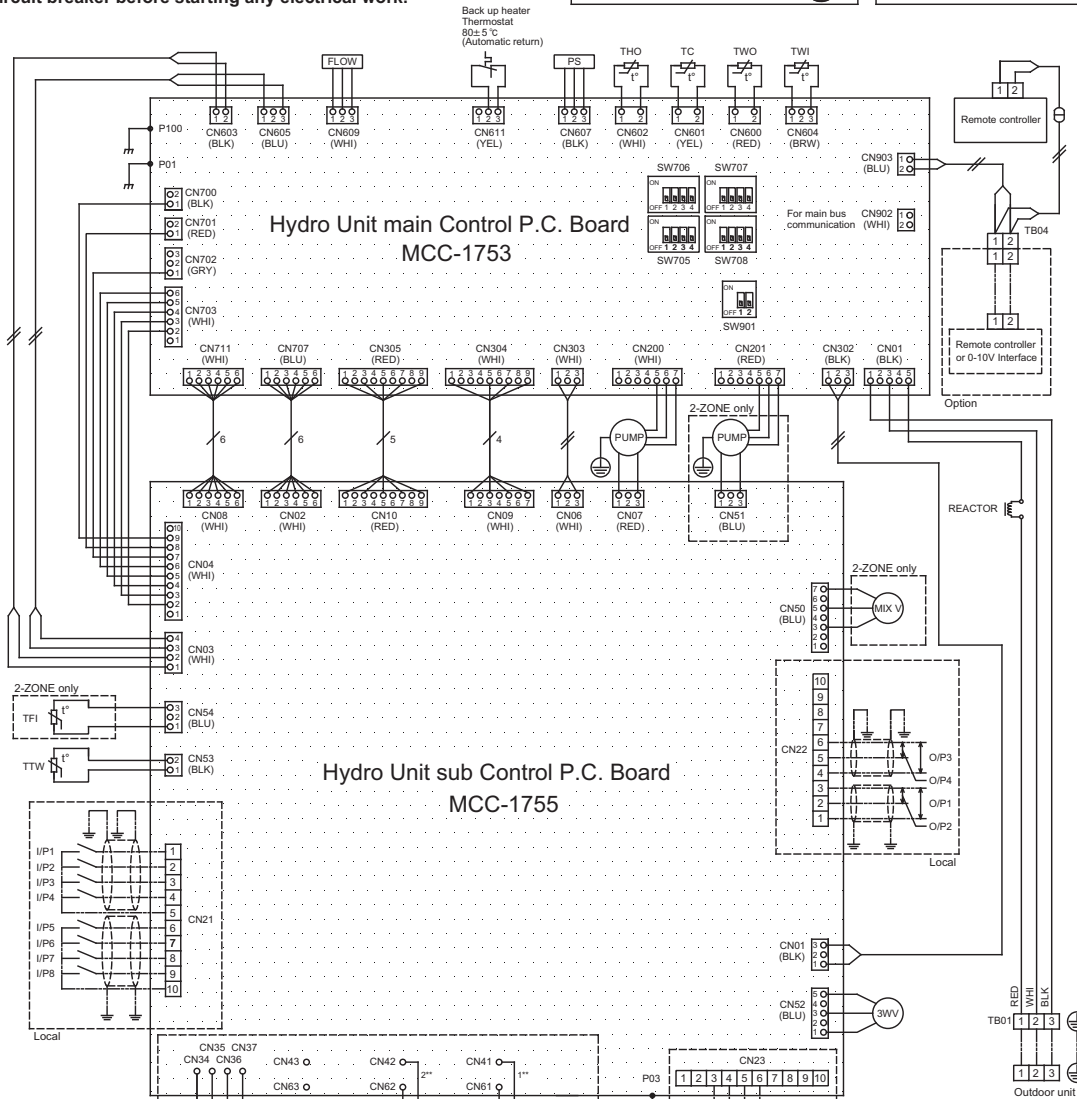

Color Indication

BLK	: BLACK
BLU	: BLUE
RED	: RED
YEL	: YELLOW
WHI	: WHITE
GRY	: GRAY
BRW	: BROWN

	Field wiring
	Protective earth
	Terminal block
	Terminal
	Connector
	P.C. board

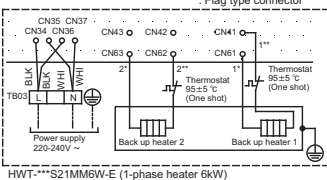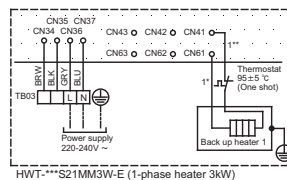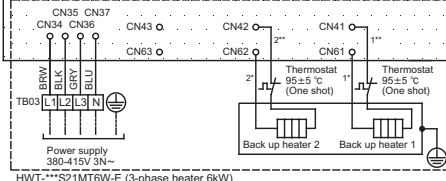

*: Straight type connector
 **: Flag type connector

Symbol	Part name	Symbol	Part name
2WV	2-Way valve (Local)	TB	Terminal block
3WV	3-Way valve	TC	Water heat exchanger temperature sensor
BH	Booster heater (Local)	TFI	Floor heating inlet temperature sensor
CN	Connector	THO	Back up heater outlet temperature sensor
FLOW	Water flow sensor	TWI	Water heat exchanger inlet temperature sensor
MIX V	Mixing valve	TWO	Water heat exchanger outlet temperature sensor
PS	Refrigerant pressure sensor		
PUMP	Water pump		


Hydro unit - All In One Type

HWT-1402S21SM3W-E, HWT-1402S21SM6W-E, HWT-1402S21ST6W-E
 HWT-1402S21ST9W-E, HWT-1402S21MM3W-E, HWT-1402S21MM6W-E
 HWT-1402S21MT6W-E, HWT-1402S21MT9W-E

Be sure to turn off all main power supply switches or the circuit breaker before starting any electrical work.

WARNING
 Perform the grounding from the earth terminal of the outdoor unit.

CAUTION
 Electric shock may happen. Don't touch the electric parts.

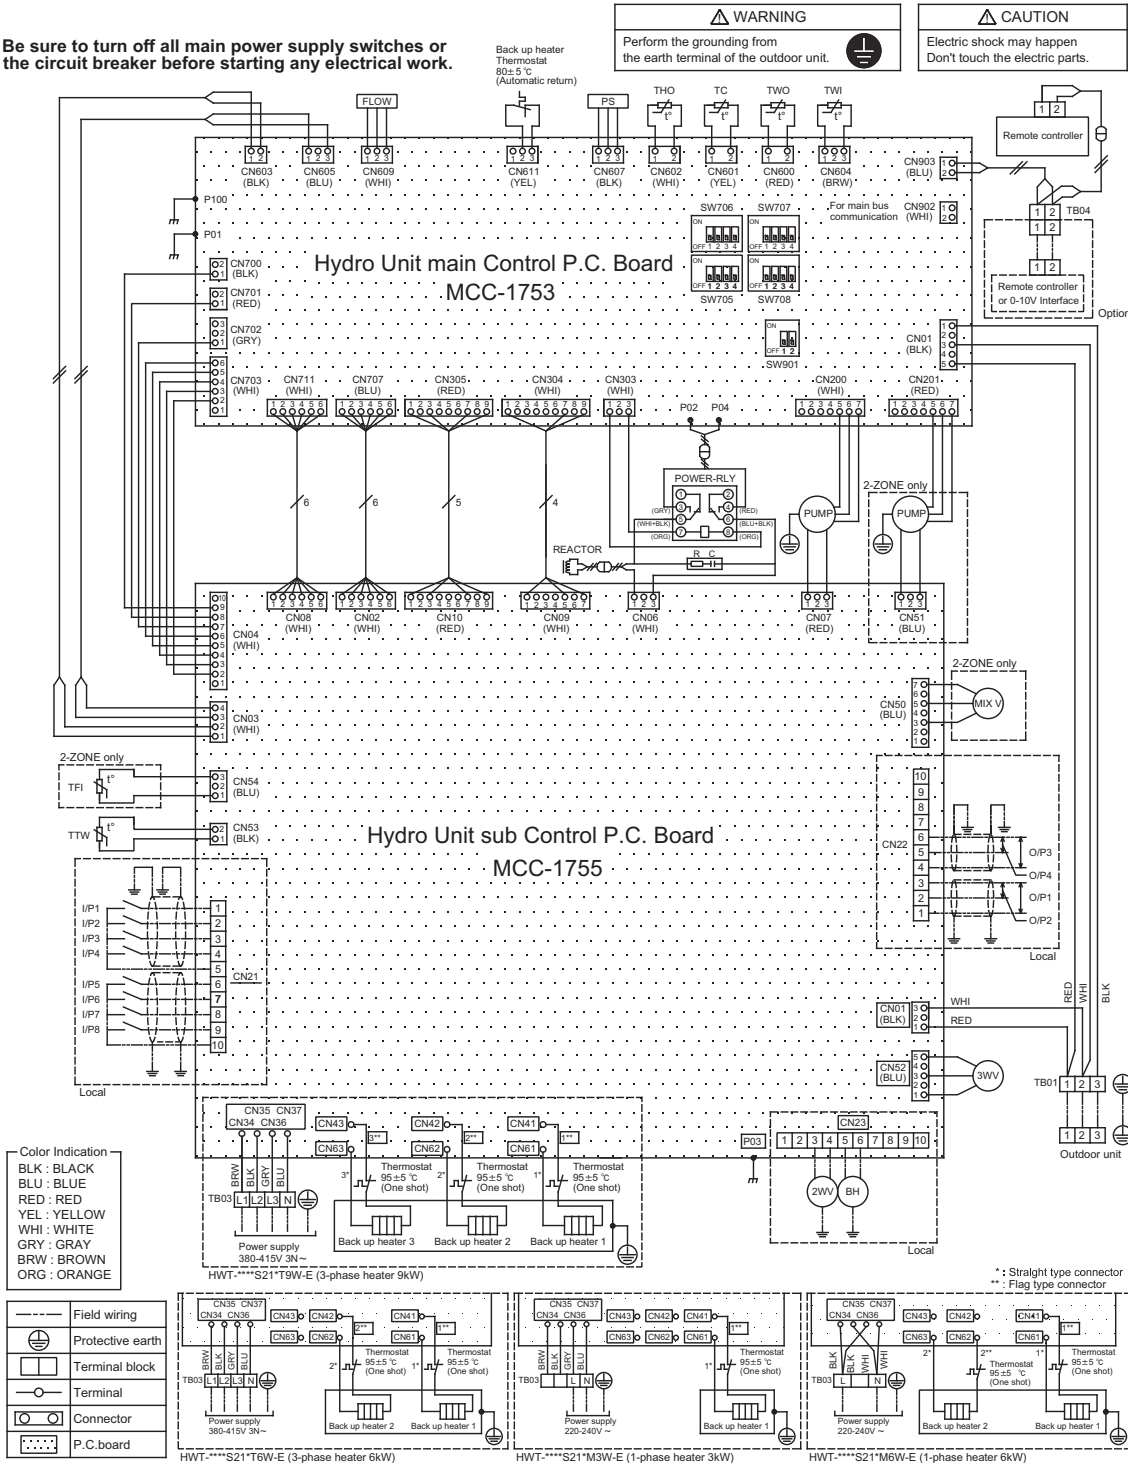

Color Indication
 BLK : BLACK
 BLU : BLUE
 RED : RED
 YEL : YELLOW
 WHI : WHITE
 GRY : GRAY
 BRW : BROWN
 ORG : ORANGE

Field wiring
 Protective earth
 Terminal block
 Terminal
 Connector
 P.C.board

Symbol	Part name	Symbol	Part name
2WV	2-Way valve (Local)	TB	Terminal block
3WV	3-Way valve	TC	Water heat exchanger temperature sensor
BH	Booster heater (Local)	TFI	Floor heating inlet temperature sensor
CN	Connector	THO	Back up heater outlet temperature sensor
FLOW	Water flow sensor	TTW	Hot water cylinder temperature sensor
MIX V	Mixing valve	TWI	Water heat exchanger inlet temperature sensor
PS	Refrigerant pressure sensor	TWO	Water heat exchanger outlet temperature sensor
PUMP	Water pump		

2-4-2. Power line


Hydro unit - Wall Mounted Type

Electrical connection to Hydro Unit

- Remove the front cover and the electrical box cover from the Hydro Unit.
- The Hydro Unit power cable must be sized in accordance with refer to “Electrical supply/cable specifications”.
- Connect the Hydro Unit power cable to Terminal 03 as shown below.

Backup heater
220-240 V ~ type
(3, 6 kW type)


Backup heater
380-415 V 3N~
type
(6, 9 kW type)

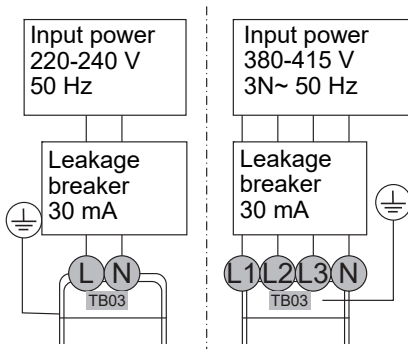



- Ensure the Hydro Unit power cable is secured using the cable clamp fitted in the electrical box.
- Ensure the Hydro Unit power cable connection terminals are tight.

Outdoor Unit to Hydro Unit electrical connection

- Outdoor unit input power 220-230 V ~, 50 Hz

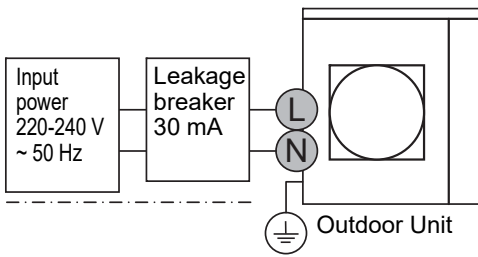

- Outdoor unit input power 380-400 V 3N ~, 50 Hz

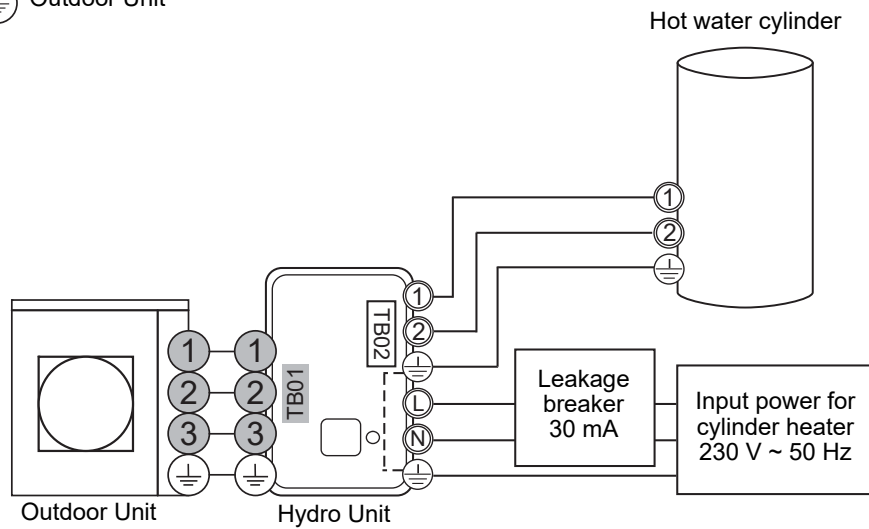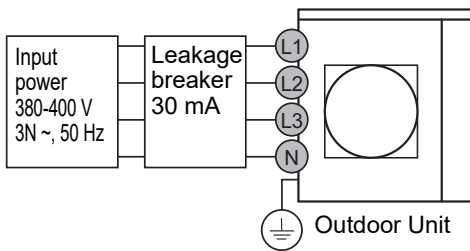

- Ensure electrical circuits are isolated before commencing work.
- The Outdoor Unit to Hydro Unit interconnecting cable must be sized in accordance with refer to “Electrical supply/ cable specifications”.
- Connect the Outdoor Unit to Hydro Unit interconnecting cable as shown in the diagram above.
- Ensure the Outdoor Unit to Hydro Unit interconnecting cable is secured using the cable clamp fitted in the electrical box.
- Ensure the Outdoor Unit to Hydro Unit interconnecting cable connection terminals are tight.


Hydro unit - All In One Type

Electrical connection to Hydro Unit for backup heater

- Remove the front cover and the electrical box cover from the Hydro Unit.
- The Hydro Unit power cable must be sized in accordance with refer to “Electrical supply/cable specifications”.
- Connect the Hydro Unit power cable to Terminal 03 as shown below.


Backup heater
220-240 V ~ type
(3, 6 kW type)

Backup heater
380-415 V 3N~
type
(6, 9 kW type)

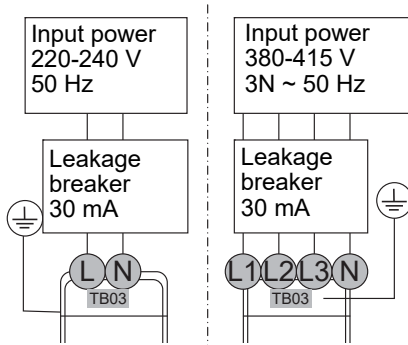


- Ensure the Hydro Unit power cable is secured using the cable clamp fitted in the electrical box.
- Ensure the Hydro Unit power cable connection terminals are tight.

3 kW, 6 kW type

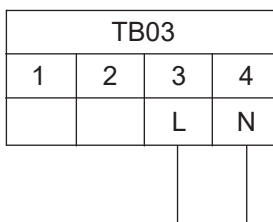


6 kW, 9 kW type


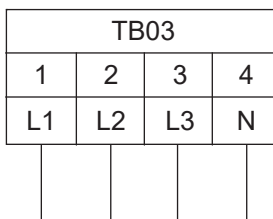


Outdoor Unit to Hydro Unit electrical connection

- Outdoor unit input power 220-230 V ~, 50 Hz

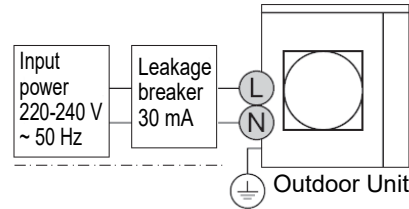


- Outdoor unit input power 380-400 V 3N ~, 50 Hz

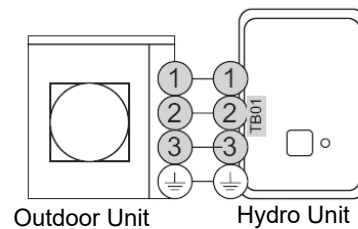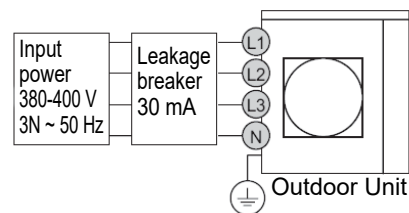


- Ensure electrical circuits are isolated before commencing work.
- The Outdoor Unit to Hydro Unit interconnecting cable must be sized in accordance with refer to “Electrical supply/cable specifications”.
- Connect the Outdoor Unit to Hydro Unit interconnecting cable as shown in the diagram above.
- Ensure the Outdoor Unit to Hydro Unit interconnecting cable is secured using the cable clamp fitted in the electrical box.
- Ensure the Outdoor Unit to Hydro Unit interconnecting cable connection terminals are tight.

2-4-3. Control line



Hydro unit - Wall Mounted Type

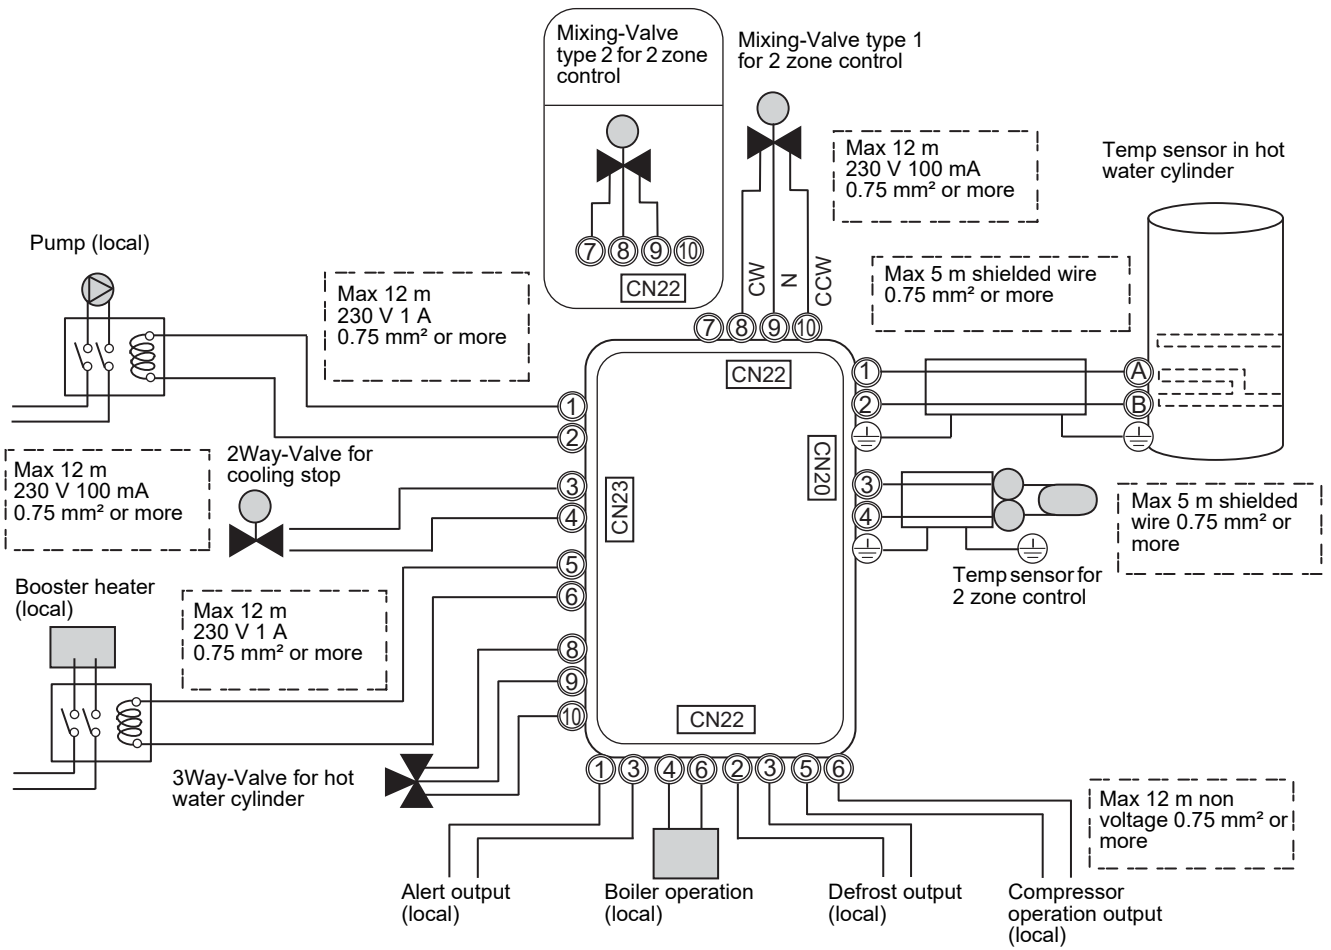


2

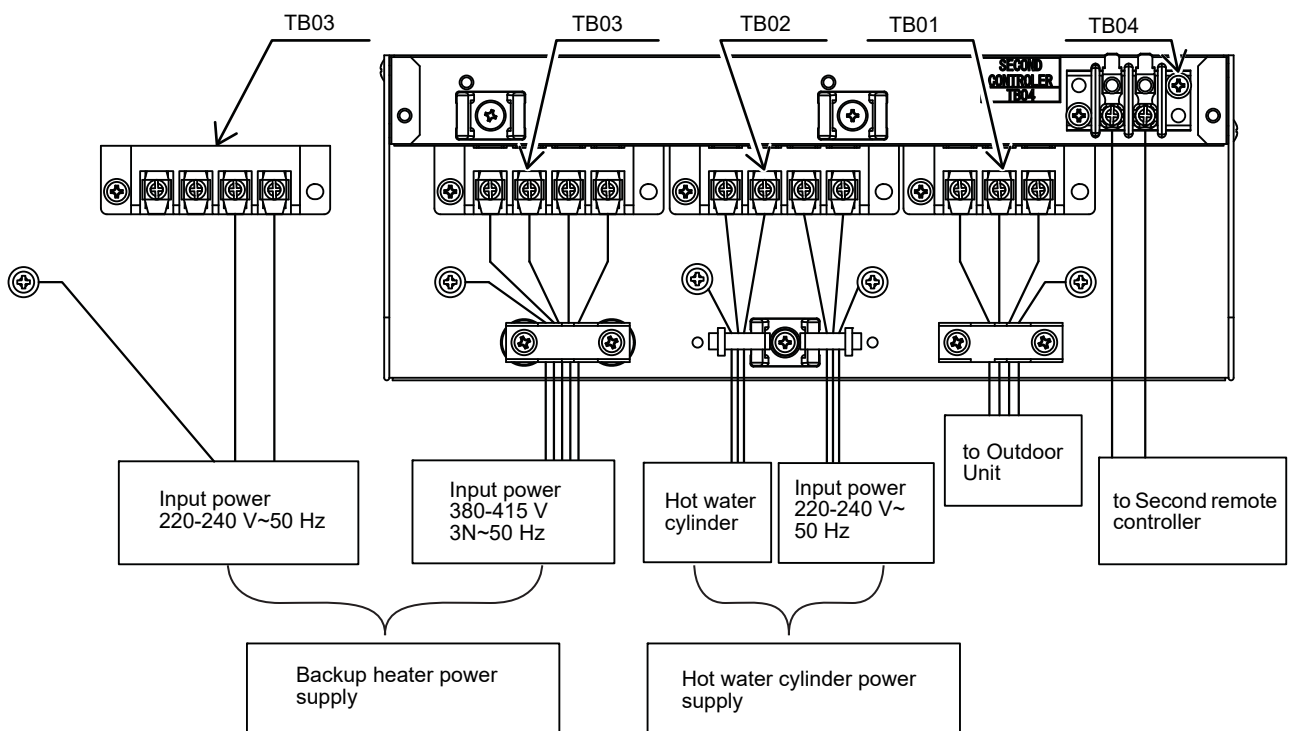


Hydro unit - All In One Type

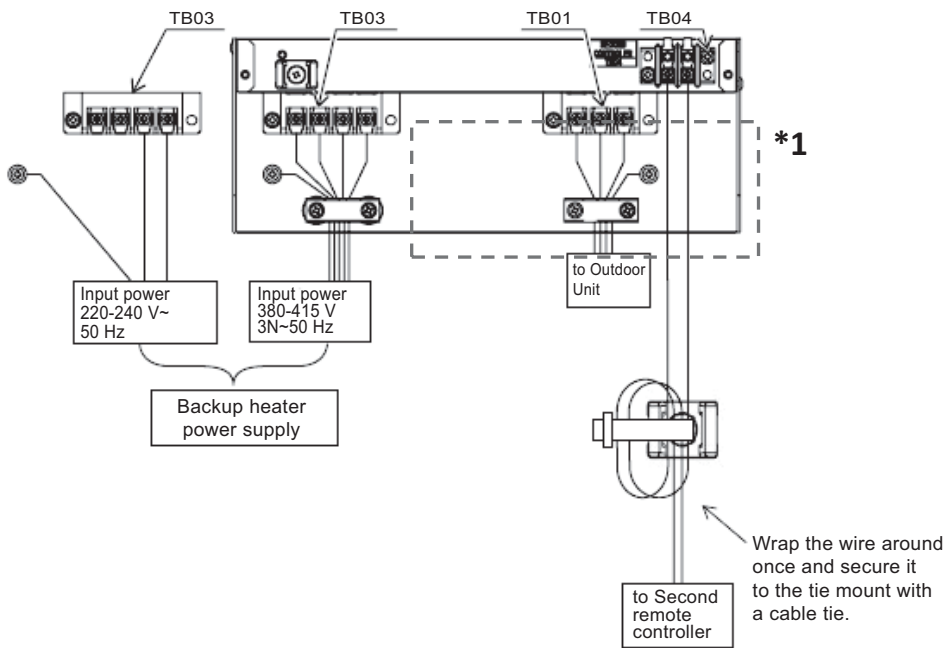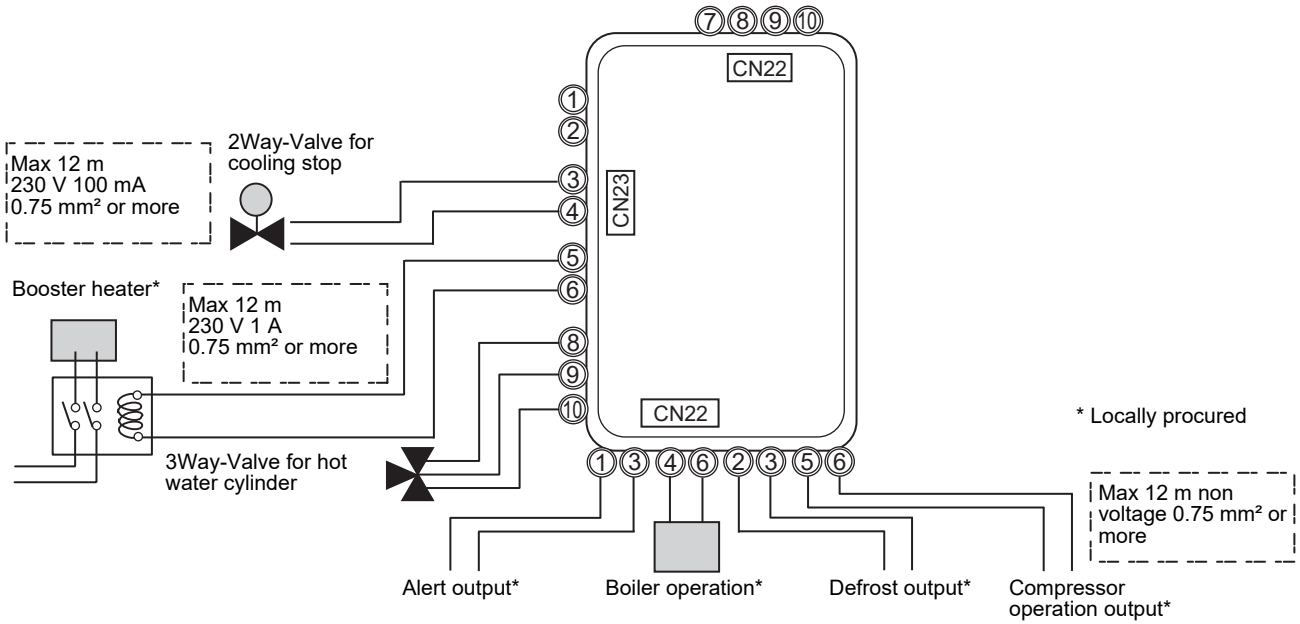

1Φ6kW Back up heater type only

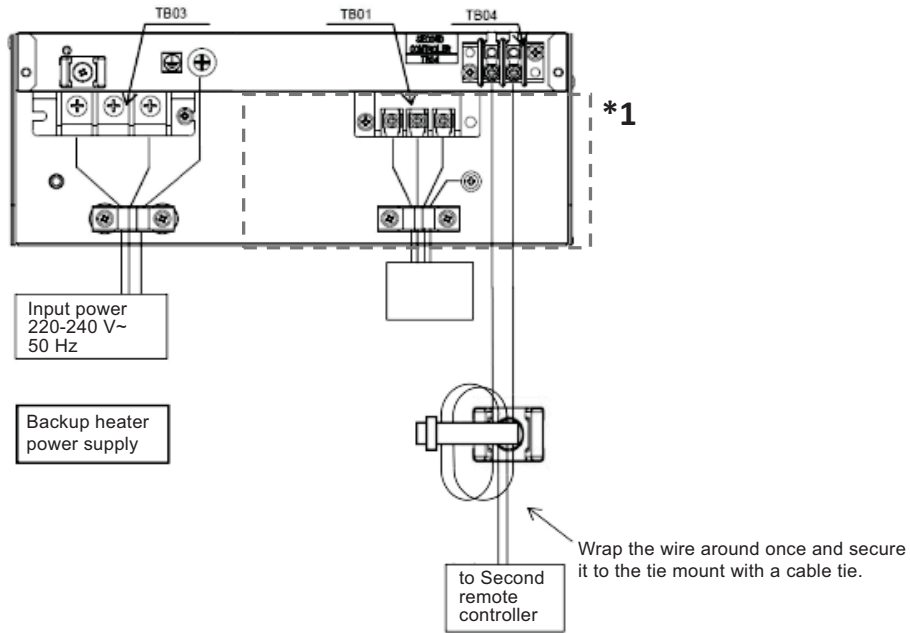


*1 The 14kW type TB01 is shown below.

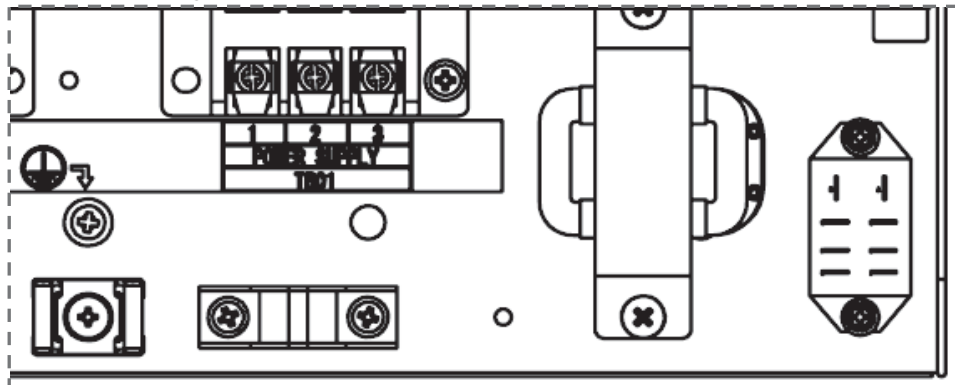


2-4-4. External Device

Hydro unit - Wall Mounted Type

Electrical connection for external booster heater

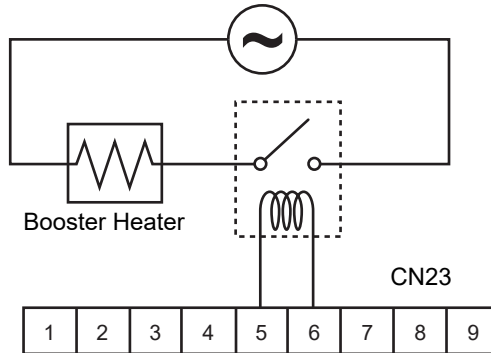


Electrical connection for external additional pumps

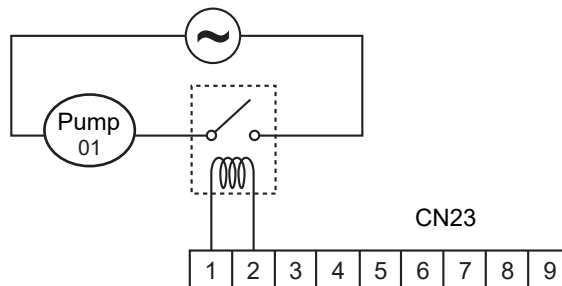

Hydro unit - All In One Type

Electrical connection for external booster heater

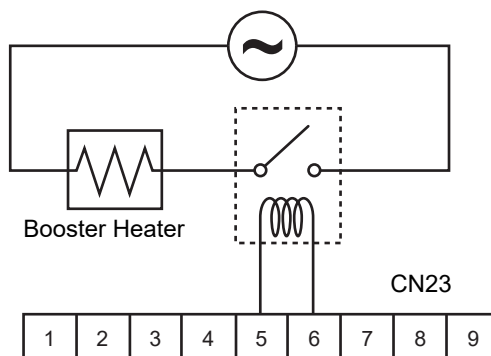

Hydro unit - Wall Mounted Type

3-way valve (diverter) connection

Required Valve Specification:

Electrical Specification: 230 V; 50 Hz; <100 mA

Valve Diameters: Port A, Port B: Ø 1 1/4"

Return Mechanism: 3 types of 3-way valve (diverter) can be used.

Set the 3-way valve in use with the DN 6B4.


		6B4
Type 1	2-wire spring return	0
Type 2	3-wire SPST	0
Type 3	3-wire SPDT	1

NOTE


Continuous operation of the valve motor at the fully open position is not recommended.

- The 3-way diverter valve is used to select either domestic hot water or space heating.
- Connect the 3-way diverter valve to terminals 8, 9 and 10 on CN23.
- Connect the 3-way diverter valve in accordance with the diagram below:


Type 1: SPRING RETURN

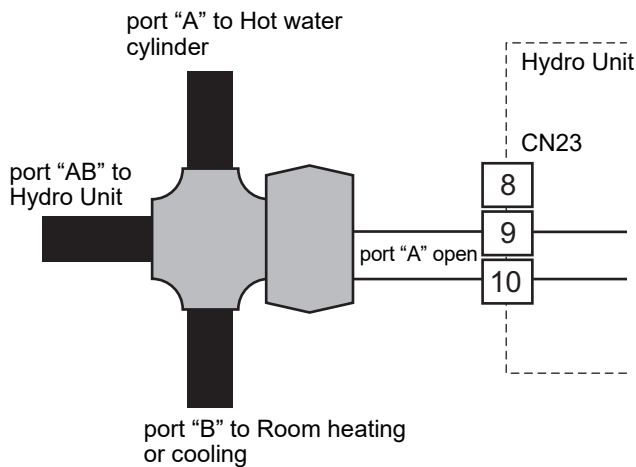

Type 2: SPST

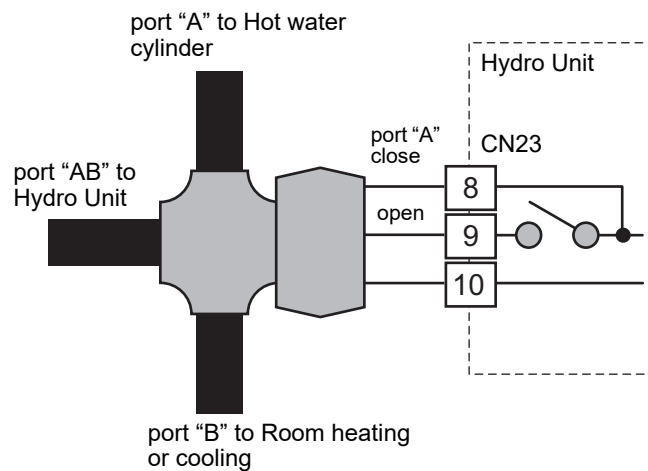

Type 3: SPDT

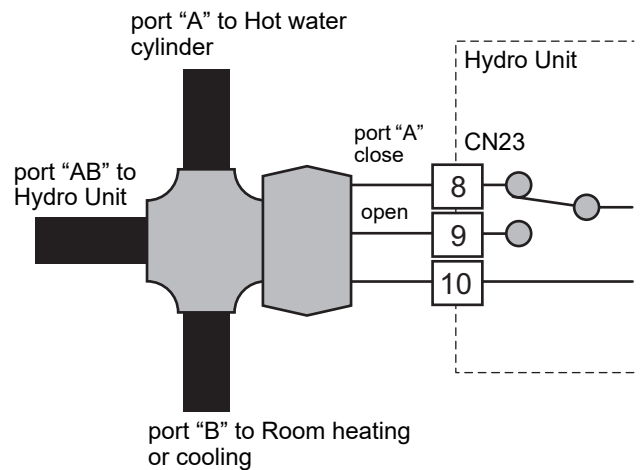

Hydro unit - Wall Mounted Type


3-way mixing valve connection

Required Actuator Specification


Electrical Specification: 230 V; 50 Hz; <100 mA
 The 3-way mixing valve is used to achieve the temperature differential needed in a 2-zone heating system.

- Connect the 3-way mixing valve to terminals 8, 9 and 10 on CN22 (for Type 1 mixing valve) or on terminals 7, 8 and 9 on CN22 (for Type 2 mixing valve).
- Connect the 3-way mixing valve in accordance with the diagrams below:

Type 1: SPDT

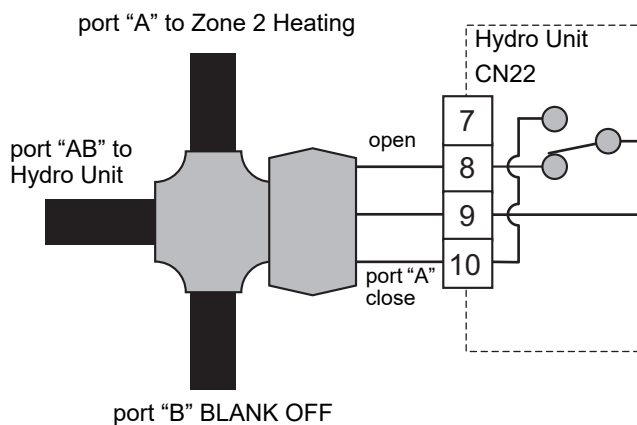

Type 2: SPST

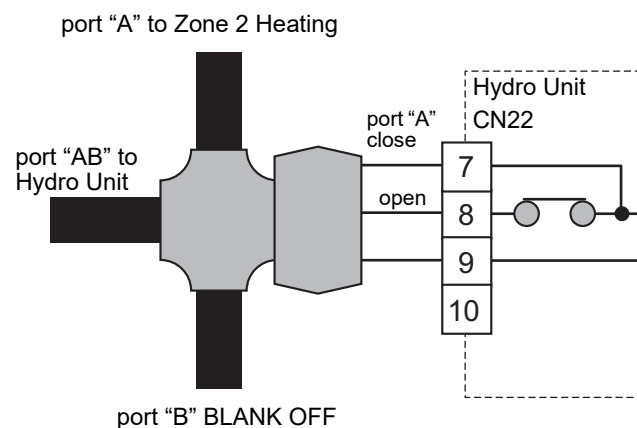


Hot water cylinder connection (optional)

- Please refer to “Electrical supply/cable specifications” for fuse/cable size and for connection details.


Electrical Connection (Hot Water Cylinder Electric Heater)

- The electric heater, incorporated in the hot water cylinder, requires a separate supply to Hydro Unit.
- Connect the hot water cylinder heater electrical supply in accordance with shown below:
 Live conductor: Terminal L on Terminal Block 02
 Neutral conductor: Terminal N on Terminal Block 02
 Earth Conductor: Earth terminal on Terminal Block 02
- Connect the hot water cylinder heater to the Hydro Unit as shown below:
 Live conductor to hot water cylinder: Terminal 1 on Terminal Block 03
 Neutral conductor to hot water cylinder: Terminal 2 on Terminal Block 03
 Earth conductor to hot water cylinder: Earth terminal on Terminal Block 03

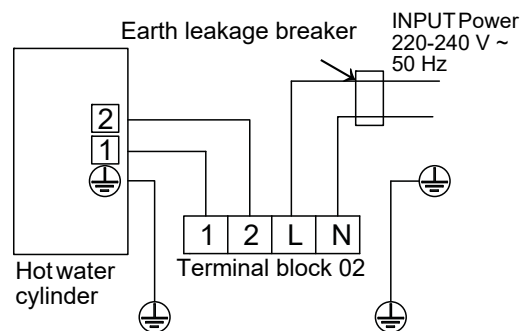

Electrical Connection (Hot Water Cylinder temperature Sensor)

- Connect the hot water cylinder temperature sensor as shown below to terminals 1 & 2 on CN20 in the Hydro Unit.
- Please ensure that the interconnecting cable, between the Hydro Unit and the hot water cylinder, is connected to earth at both ends of the cable using the shield wire.

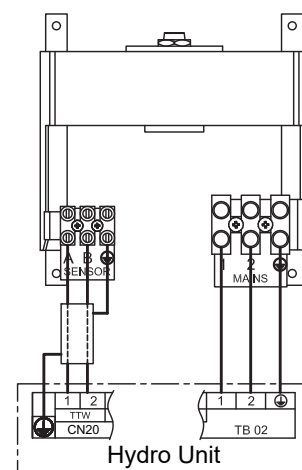

2-5. Capacity Tables

Outdoor unit: HWT-401HW-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	2.97	2.88	2.79	—	—	—
	-15	3.57	3.43	3.29	3.15	—	—
	-10	4.04	3.94	3.85	3.76	3.66	—
	-7	4.32	4.25	4.19	4.12	4.02	3.91
	-2	4.49	4.54	4.60	4.65	4.52	4.38
	2	4.63	4.78	4.93	5.08	4.92	4.76
	7	6.12	7.25	7.11	6.97	6.74	6.51
	10	8.11	7.95	7.80	7.64	7.41	7.18
	12	8.53	8.42	8.26	8.09	7.86	7.62
	15	8.76	8.63	8.47	8.31	8.05	7.79
20	9.13	8.98	8.83	8.67	8.37	8.06	

Power input (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	1.18	1.28	1.38	—	—	—
	-15	1.26	1.35	1.44	1.53	—	—
	-10	1.29	1.38	1.49	1.62	1.80	—
	-7	1.25	1.39	1.53	1.67	1.80	1.93
	-2	1.19	1.35	1.51	1.66	1.82	1.97
	2	1.14	1.31	1.49	1.66	1.84	2.01
	7	1.22	1.49	1.66	1.82	1.99	2.15
	10	1.31	1.48	1.66	1.83	2.00	2.17
	12	1.31	1.48	1.66	1.84	2.02	2.19
	15	1.31	1.48	1.66	1.84	2.02	2.19
20	1.31	1.48	1.67	1.85	2.02	2.18	

COP		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	2.52	2.25	2.02	—	—	—
	-15	2.83	2.54	2.28	2.06	—	—
	-10	3.14	2.86	2.59	2.31	2.04	—
	-7	3.45	3.06	2.74	2.47	2.23	2.03
	-2	3.79	3.38	3.06	2.80	2.48	2.22
	2	4.08	3.65	3.32	3.06	2.68	2.37
	7	5.02	4.87	4.30	3.83	3.40	3.03
	10	6.19	5.36	4.70	4.17	3.70	3.30
	12	6.51	5.69	4.97	4.40	3.90	3.48
	15	6.68	5.83	5.10	4.51	3.99	3.56
20	6.97	6.07	5.30	4.69	4.15	3.70	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-401HW-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	3.22	3.10	2.98	—	—	—
	-15	3.91	3.73	3.55	3.37	—	—
	-10	4.57	4.40	4.23	4.06	3.90	—
	-7	4.96	4.80	4.64	4.48	4.40	4.31
	-2	5.89	5.70	5.51	5.32	5.15	4.98
	2	6.64	6.42	6.21	5.99	5.76	5.52
	7	7.39	7.25	7.11	6.97	6.74	6.51
	10	8.11	7.95	7.80	7.64	7.41	7.18
	12	8.53	8.42	8.26	8.09	7.86	7.62
	15	8.76	8.63	8.47	8.31	8.05	7.79
20	9.13	8.98	8.83	8.67	8.37	8.06	

Power input (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	1.22	1.32	1.42	—	—	—
	-15	1.32	1.41	1.51	1.60	—	—
	-10	1.38	1.46	1.56	1.69	1.85	—
	-7	1.37	1.49	1.61	1.73	1.88	2.03
	-2	1.37	1.51	1.65	1.79	1.95	2.11
	2	1.37	1.52	1.68	1.83	2.00	2.17
	7	1.33	1.49	1.66	1.82	1.99	2.15
	10	1.31	1.48	1.66	1.83	2.00	2.17
	12	1.31	1.48	1.66	1.84	2.02	2.19
	15	1.31	1.48	1.66	1.84	2.02	2.19
20	1.31	1.48	1.67	1.85	2.02	2.18	

COP		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	2.64	2.35	2.10	—	—	—
	-15	2.97	2.65	2.36	2.11	—	—
	-10	3.30	3.01	2.71	2.41	2.11	—
	-7	3.62	3.22	2.88	2.59	2.34	2.12
	-2	4.31	3.78	3.35	2.98	2.65	2.36
	2	4.86	4.22	3.70	3.27	2.88	2.54
	7	5.58	4.87	4.30	3.83	3.40	3.03
	10	6.19	5.36	4.70	4.17	3.70	3.30
	12	6.51	5.69	4.97	4.40	3.90	3.48
	15	6.68	5.83	5.10	4.51	3.99	3.56
20	6.97	6.07	5.30	4.69	4.15	3.70	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-401HW-E

Cooling capacity and power input

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	5.47	5.86	6.24	6.62	7.19
	27	5.13	5.56	5.98	6.31	6.79
	30	4.98	5.43	5.87	6.17	6.62
	35	4.74	5.22	5.69	5.95	6.34
	40	4.00	4.58	5.16	5.44	5.87
	43	3.56	4.20	4.84	5.14	5.59

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	1.03	1.11	1.18	1.16	1.13
	27	1.20	1.25	1.30	1.29	1.28
	30	1.27	1.31	1.35	1.35	1.34
	35	1.39	1.41	1.43	1.44	1.45
	40	1.51	1.54	1.57	1.58	1.59
	43	1.58	1.62	1.65	1.66	1.68

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	5.31	5.30	5.29	5.71	6.36
	27	4.28	4.45	4.61	4.89	5.31
	30	3.92	4.15	4.36	4.59	4.93
	35	3.41	3.70	3.98	4.14	4.37
	40	2.65	2.98	3.29	3.45	3.68
	43	2.25	2.60	2.93	3.09	3.33

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-601HW-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	3.66	3.63	3.60	—	—	—
	-15	4.78	4.39	4.01	3.62	—	—
	-10	5.15	4.93	4.72	4.50	4.29	—
	-7	5.38	5.26	5.15	5.03	4.92	4.80
	-2	4.49	4.54	4.60	4.65	4.89	5.12
	2	4.63	4.78	4.93	5.08	5.23	5.37
	7	6.12	7.25	7.11	6.97	7.25	7.53
	10	8.11	7.95	7.80	7.64	7.82	8.00
	12	8.53	8.42	8.26	8.09	8.20	8.31
	15	8.76	8.63	8.47	8.31	8.26	8.22
20	9.13	8.98	8.83	8.67	8.37	8.06	

Power input (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	1.49	1.65	1.81	—	—	—
	-15	1.69	1.71	1.73	1.75	—	—
	-10	1.68	1.75	1.83	1.94	2.06	—
	-7	1.64	1.77	1.90	2.03	2.25	2.47
	-2	1.19	1.35	1.51	1.66	2.04	2.42
	2	1.14	1.31	1.49	1.66	2.02	2.38
	7	1.22	1.49	1.66	1.82	2.22	2.61
	10	1.31	1.48	1.66	1.83	2.22	2.60
	12	1.31	1.48	1.66	1.84	2.22	2.59
	15	1.31	1.48	1.66	1.84	2.14	2.44
20	1.31	1.48	1.67	1.85	2.02	2.18	

COP		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	2.46	2.20	1.99	—	—	—
	-15	2.83	2.57	2.32	2.07	—	—
	-10	3.07	2.82	2.57	2.32	2.08	—
	-7	3.28	2.97	2.71	2.48	2.18	1.94
	-2	3.79	3.38	3.06	2.80	2.39	2.11
	2	4.08	3.65	3.32	3.06	2.59	2.26
	7	5.02	4.87	4.30	3.83	3.27	2.89
	10	6.19	5.36	4.70	4.17	3.53	3.08
	12	6.51	5.69	4.97	4.40	3.70	3.21
	15	6.68	5.83	5.10	4.51	3.86	3.37
20	6.97	6.07	5.30	4.69	4.15	3.70	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-601HW-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	4.13	4.03	3.93	—	—	—
	-15	5.11	4.75	4.39	4.03	—	—
	-10	5.79	5.57	5.35	5.14	4.92	—
	-7	6.19	6.06	5.93	5.80	5.61	5.42
	-2	5.89	5.70	5.51	5.32	5.56	5.80
	2	6.64	6.42	6.21	5.99	6.05	6.10
	7	7.39	7.25	7.11	6.97	7.25	7.53
	10	8.11	7.95	7.80	7.64	7.82	8.00
	12	8.53	8.42	8.26	8.09	8.20	8.31
	15	8.76	8.63	8.47	8.31	8.26	8.22
20	9.13	8.98	8.83	8.67	8.37	8.06	

Power input (kW)		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	1.58	1.73	1.88	—	—	—
	-15	1.77	1.79	1.82	1.84	—	—
	-10	1.81	1.89	1.99	2.11	2.26	—
	-7	1.79	1.95	2.10	2.25	2.46	2.66
	-2	1.37	1.51	1.65	1.79	2.18	2.58
	2	1.37	1.52	1.68	1.83	2.18	2.52
	7	1.33	1.49	1.66	1.82	2.22	2.61
	10	1.31	1.48	1.66	1.83	2.22	2.60
	12	1.31	1.48	1.66	1.84	2.22	2.59
	15	1.31	1.48	1.66	1.84	2.14	2.44
20	1.31	1.48	1.67	1.85	2.02	2.18	

COP		LWT (°C)					
		30	35	40	45	50	55
TO (°C)	-20	2.61	2.33	2.09	—	—	—
	-15	2.90	2.65	2.42	2.19	—	—
	-10	3.20	2.94	2.69	2.43	2.18	—
	-7	3.45	3.12	2.83	2.58	2.29	2.04
	-2	4.31	3.78	3.35	2.98	2.55	2.25
	2	4.86	4.22	3.70	3.27	2.78	2.42
	7	5.58	4.87	4.30	3.83	3.27	2.89
	10	6.19	5.36	4.70	4.17	3.53	3.08
	12	6.51	5.69	4.97	4.40	3.70	3.21
	15	6.68	5.83	5.10	4.51	3.86	3.37
20	6.97	6.07	5.30	4.69	4.15	3.70	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-601HW-E

Cooling capacity and power input

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	5.72	6.18	6.63	6.98	7.51
	27	5.54	6.06	6.57	6.88	7.33
	30	5.46	6.01	6.55	6.83	7.25
	35	5.33	5.92	6.51	6.75	7.12
	40	4.81	5.42	6.04	6.26	6.60
	43	4.49	5.12	5.75	5.97	6.29

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	1.12	1.17	1.21	1.22	1.23
	27	1.40	1.44	1.48	1.49	1.51
	30	1.52	1.56	1.59	1.60	1.62
	35	1.72	1.75	1.78	1.80	1.82
	40	1.86	1.90	1.94	1.95	1.97
	43	1.94	1.99	2.03	2.04	2.06

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	5.11	5.30	5.48	5.73	6.11
	27	3.96	4.21	4.45	4.62	4.87
	30	3.59	3.86	4.12	4.26	4.47
	35	3.10	3.38	3.66	3.76	3.91
	40	2.59	2.86	3.12	3.21	3.35
	43	2.31	2.58	2.83	2.92	3.05

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-801H(R)W-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	4.04	4.06	4.08	4.10	4.17	4.23	4.11	—
	-20	5.00	5.01	5.03	4.70	5.08	5.11	4.93	—
	-15	5.95	5.96	5.98	6.00	6.00	5.99	5.75	—
	-10	6.80	6.74	6.77	6.80	6.66	6.52	6.24	—
	-7	7.31	7.21	7.25	7.28	7.06	6.83	6.54	—
	-2	8.13	8.08	8.08	8.08	7.99	7.90	7.07	—
	2	8.57	8.49	8.53	8.57	8.38	8.19	7.49	—
	7	12.39	11.90	11.83	11.75	10.86	9.96	9.07	5.08
	10	13.02	12.57	12.46	12.36	11.56	10.76	9.96	5.09
	12	13.44	13.01	12.89	12.77	12.03	11.29	10.55	5.09
	15	13.69	13.22	13.04	12.87	12.11	11.36	10.60	5.08
20	14.10	13.57	13.30	13.03	12.25	11.47	10.69	5.06	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	1.87	2.09	2.31	2.53	2.82	3.11	3.06	—
	-20	2.07	2.29	2.53	2.64	2.98	3.20	3.28	—
	-15	2.28	2.48	2.74	3.00	3.15	3.29	3.49	—
	-10	2.40	2.60	2.86	3.11	3.25	3.39	3.54	—
	-7	2.47	2.67	2.93	3.18	3.32	3.45	3.57	—
	-2	2.29	2.52	2.78	3.03	3.23	3.43	3.63	—
	2	2.19	2.41	2.72	3.02	3.15	3.28	3.31	—
	7	2.41	2.62	3.01	3.39	3.43	3.47	3.51	2.19
	10	2.42	2.63	3.00	3.38	3.42	3.47	3.52	2.06
	12	2.42	2.63	3.00	3.37	3.42	3.47	3.52	1.98
	15	2.42	2.63	3.01	3.39	3.42	3.46	3.49	1.90
20	2.42	2.62	3.02	3.42	3.43	3.44	3.45	1.76	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.16	1.94	1.77	1.62	1.48	1.36	1.34	—
	-20	2.41	2.19	1.99	1.78	1.70	1.60	1.51	—
	-15	2.61	2.40	2.18	2.00	1.91	1.82	1.65	—
	-10	2.83	2.59	2.37	2.18	2.05	1.92	1.76	—
	-7	2.95	2.70	2.48	2.29	2.13	1.98	1.83	—
	-2	3.54	3.21	2.91	2.67	2.47	2.30	1.95	—
	2	3.91	3.52	3.14	2.84	2.66	2.50	2.26	—
	7	5.14	4.54	3.94	3.47	3.16	2.87	2.58	2.32
	10	5.39	4.79	4.15	3.66	3.38	3.10	2.83	2.46
	12	5.55	4.95	4.30	3.79	3.52	3.25	3.00	2.57
	15	5.66	5.03	4.34	3.80	3.54	3.28	3.03	2.68
20	5.84	5.18	4.40	3.81	3.57	3.33	3.10	2.88	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-801H(R)W-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	4.37	4.43	4.49	4.55	4.61	4.67	4.51	—
	-20	5.40	5.45	5.50	5.27	5.54	5.54	5.31	—
	-15	6.42	6.46	6.50	6.54	6.48	6.41	6.10	—
	-10	7.60	7.49	7.47	7.45	7.23	7.00	6.67	—
	-7	8.30	8.11	8.06	8.00	7.68	7.35	7.01	—
	-2	9.35	9.24	9.20	9.15	8.97	8.79	7.78	—
	2	10.50	10.30	10.28	10.26	9.88	9.50	8.40	—
	7	12.39	11.90	11.83	11.75	10.86	9.96	9.07	5.08
	10	13.02	12.57	12.46	12.36	11.56	10.76	9.96	5.09
	12	13.44	13.01	12.89	12.77	12.03	11.29	10.55	5.09
	15	13.69	13.22	13.04	12.87	12.11	11.36	10.60	5.08
20	14.10	13.57	13.30	13.03	12.25	11.47	10.69	5.06	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	1.99	2.22	2.45	2.68	2.98	3.27	3.21	—
	-20	2.14	2.41	2.68	2.83	3.15	3.36	3.41	—
	-15	2.30	2.60	2.91	3.21	3.33	3.44	3.61	—
	-10	2.55	2.78	3.04	3.31	3.43	3.54	3.67	—
	-7	2.70	2.88	3.13	3.37	3.49	3.60	3.71	—
	-2	2.48	2.71	2.99	3.26	3.46	3.65	3.61	—
	2	2.57	2.77	3.08	3.38	3.47	3.56	3.53	—
	7	2.41	2.62	3.01	3.39	3.43	3.47	3.51	2.19
	10	2.42	2.63	3.00	3.38	3.42	3.47	3.52	2.06
	12	2.42	2.63	3.00	3.37	3.42	3.47	3.52	1.98
	15	2.42	2.63	3.01	3.39	3.42	3.46	3.49	1.90
20	2.42	2.62	3.02	3.42	3.43	3.44	3.45	1.76	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.20	2.00	1.83	1.70	1.55	1.43	1.40	—
	-20	2.52	2.26	2.05	1.86	1.76	1.65	1.56	—
	-15	2.80	2.48	2.24	2.04	1.95	1.86	1.69	—
	-10	2.98	2.70	2.46	2.25	2.11	1.98	1.82	—
	-7	3.07	2.82	2.58	2.37	2.20	2.04	1.89	—
	-2	3.78	3.41	3.08	2.81	2.60	2.41	2.16	—
	2	4.08	3.72	3.34	3.04	2.85	2.67	2.38	—
	7	5.14	4.54	3.94	3.47	3.16	2.87	2.58	2.32
	10	5.39	4.79	4.15	3.66	3.38	3.10	2.83	2.46
	12	5.55	4.95	4.30	3.79	3.52	3.25	3.00	2.57
	15	5.66	5.03	4.34	3.80	3.54	3.28	3.03	2.68
20	5.84	5.18	4.40	3.81	3.57	3.33	3.10	2.88	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-801H(R)W-E

Cooling capacity and power input

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	7.79	8.42	8.97	9.46	10.09
	27	7.30	7.90	8.49	8.91	9.51
	30	7.08	7.68	8.28	8.67	9.26
	35	6.73	7.31	7.94	8.27	8.85
	40	5.54	6.22	7.00	7.36	8.04
	43	4.82	5.57	6.43	6.81	7.56

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	1.71	1.71	1.77	1.71	1.71
	27	1.93	1.95	1.99	1.97	1.98
	30	2.03	2.05	2.09	2.08	2.10
	35	2.19	2.22	2.25	2.26	2.29
	40	2.40	2.44	2.50	2.50	2.54
	43	2.53	2.57	2.65	2.65	2.69

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	4.56	4.92	5.07	5.53	5.90
	27	3.77	4.06	4.26	4.53	4.80
	30	3.49	3.75	3.96	4.17	4.42
	35	3.07	3.30	3.53	3.66	3.86
	40	2.30	2.55	2.80	2.94	3.17
	43	1.91	2.16	2.43	2.57	2.81

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1101H(R)W-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	4.66	4.70	4.74	4.78	4.80	4.82	4.54	—
	-20	5.70	5.74	5.77	5.53	5.71	5.61	5.15	—
	-15	6.74	6.77	6.80	6.83	6.62	6.40	5.75	—
	-10	7.67	7.51	7.43	7.35	7.01	6.67	6.24	—
	-7	8.27	7.95	7.81	7.66	7.17	6.83	6.54	—
	-2	9.14	8.89	8.81	8.72	8.31	7.90	7.07	—
	2	9.55	9.28	9.08	8.87	8.53	8.19	7.49	—
	7	14.01	13.24	12.83	12.41	11.29	10.17	9.05	5.08
	10	14.62	13.86	13.39	12.92	11.88	10.84	9.80	5.09
	12	15.03	14.28	13.77	13.26	12.28	11.29	10.31	5.09
	15	15.30	14.51	13.87	13.23	12.30	11.36	10.42	5.08
20	15.76	14.90	14.05	13.19	12.33	11.47	10.61	5.06	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.19	2.43	2.68	2.92	3.20	3.48	3.44	—
	-20	2.44	2.71	2.97	3.19	3.37	3.50	3.47	—
	-15	2.70	2.98	3.27	3.55	3.54	3.52	3.49	—
	-10	2.92	3.07	3.28	3.49	3.49	3.48	3.54	—
	-7	3.05	3.13	3.30	3.46	3.47	3.45	3.57	—
	-2	2.74	2.88	3.14	3.39	3.41	3.43	3.43	—
	2	2.67	2.79	3.00	3.20	3.24	3.28	3.31	—
	7	3.03	3.15	3.43	3.71	3.67	3.62	3.58	2.19
	10	3.02	3.12	3.37	3.61	3.57	3.53	3.49	2.06
	12	3.01	3.10	3.33	3.55	3.51	3.47	3.43	1.98
	15	3.00	3.09	3.31	3.53	3.50	3.46	3.42	1.90
20	2.99	3.08	3.29	3.50	3.47	3.44	3.41	1.76	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.13	1.93	1.77	1.64	1.50	1.39	1.32	—
	-20	2.34	2.12	1.94	1.73	1.69	1.60	1.48	—
	-15	2.50	2.27	2.08	1.92	1.87	1.82	1.65	—
	-10	2.63	2.44	2.26	2.10	2.01	1.92	1.76	—
	-7	2.72	2.54	2.37	2.21	2.07	1.98	1.83	—
	-2	3.33	3.09	2.81	2.57	2.44	2.30	2.06	—
	2	3.58	3.33	3.03	2.77	2.63	2.50	2.26	—
	7	4.62	4.20	3.74	3.35	3.08	2.81	2.53	2.32
	10	4.84	4.44	3.98	3.57	3.33	3.07	2.81	2.46
	12	5.00	4.61	4.14	3.74	3.50	3.25	3.00	2.57
	15	5.10	4.69	4.19	3.75	3.52	3.28	3.04	2.68
20	5.27	4.84	4.27	3.77	3.55	3.33	3.11	2.88	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1101H(R)W-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	5.12	5.20	5.28	5.36	5.35	5.33	5.06	—
	-20	6.21	6.29	6.36	6.25	6.26	6.07	5.58	—
	-15	7.30	7.37	7.45	7.52	7.17	6.81	6.10	—
	-10	8.70	8.45	8.27	8.10	7.62	7.15	6.67	—
	-7	9.56	9.10	8.77	8.44	7.86	7.72	7.01	—
	-2	10.65	10.28	10.16	10.03	9.41	9.23	7.78	—
	2	11.95	11.46	11.06	10.66	10.08	9.98	8.40	—
	7	14.01	13.24	12.83	12.41	11.29	10.17	9.05	5.08
	10	14.62	13.86	13.39	12.92	11.88	10.84	9.80	5.09
	12	15.03	14.28	13.77	13.26	12.28	11.29	10.31	5.09
	15	15.30	14.51	13.87	13.23	12.30	11.36	10.42	5.07
20	15.76	14.90	14.05	13.19	12.33	11.47	10.61	5.06	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.32	2.60	2.89	3.17	3.43	3.69	3.63	—
	-20	2.58	2.89	3.19	3.49	3.59	3.68	3.62	—
	-15	2.85	3.17	3.50	3.82	3.75	3.67	3.61	—
	-10	3.17	3.32	3.53	3.74	3.68	3.63	3.67	—
	-7	3.35	3.41	3.55	3.69	3.68	3.78	3.71	—
	-2	3.05	3.17	3.43	3.69	3.67	3.83	3.61	—
	2	3.16	3.24	3.42	3.59	3.58	3.74	3.53	—
	7	3.03	3.15	3.43	3.71	3.67	3.62	3.58	2.19
	10	3.02	3.12	3.37	3.61	3.57	3.53	3.49	2.06
	12	3.01	3.10	3.33	3.55	3.51	3.47	3.43	1.98
	15	3.00	3.09	3.31	3.53	3.50	3.46	3.42	1.90
20	2.99	3.08	3.29	3.50	3.47	3.44	3.41	1.76	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.21	2.00	1.83	1.69	1.56	1.44	1.39	—
	-20	2.41	2.18	1.99	1.79	1.74	1.65	1.54	—
	-15	2.56	2.32	2.13	1.97	1.91	1.86	1.69	—
	-10	2.74	2.55	2.34	2.17	2.07	1.97	1.82	—
	-7	2.86	2.67	2.47	2.29	2.14	2.04	1.89	—
	-2	3.49	3.24	2.96	2.72	2.56	2.41	2.16	—
	2	3.78	3.54	3.24	2.97	2.82	2.67	2.38	—
	7	4.62	4.20	3.74	3.35	3.08	2.81	2.53	2.32
	10	4.84	4.44	3.98	3.57	3.33	3.07	2.81	2.46
	12	5.00	4.61	4.14	3.74	3.50	3.25	3.00	2.57
	15	5.10	4.69	4.19	3.75	3.52	3.28	3.04	2.67
20	5.27	4.84	4.27	3.77	3.55	3.33	3.11	2.88	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1101H(R)W-E**Cooling capacity and power input**

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	8.12	8.79	9.47	9.90	10.57
	27	7.91	8.60	9.37	9.74	10.43
	30	7.83	8.52	9.32	9.67	10.36
	35	8.00	8.38	9.25	9.56	10.26
	40	5.97	6.68	7.49	7.86	8.57
	43	4.95	5.66	6.43	6.85	7.56

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	1.85	1.84	1.83	1.81	1.80
	27	2.25	2.29	2.37	2.35	2.39
	30	2.42	2.48	2.60	2.58	2.64
	35	2.86	2.81	2.98	2.96	3.06
	40	2.69	2.72	2.77	2.79	2.83
	43	2.67	2.68	2.65	2.68	2.69

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	4.39	4.79	5.17	5.46	5.87
	27	3.52	3.76	3.96	4.14	4.37
	30	3.23	3.43	3.59	3.75	3.93
	35	2.80	2.99	3.10	3.22	3.35
	40	2.22	2.45	2.70	2.82	3.03
	43	1.85	2.12	2.43	2.55	2.81

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1401H(R)W-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	7.08	7.07	7.07	7.06	7.03	6.99	—	—
	-20	8.28	8.17	8.18	8.19	7.95	7.71	—	—
	-15	9.48	9.27	9.30	9.32	8.87	8.42	7.55	—
	-10	10.01	9.85	9.84	9.83	9.50	9.17	8.39	—
	-7	10.33	10.19	10.17	10.14	9.88	9.62	8.90	—
	-2	11.67	11.38	11.16	10.93	10.58	10.22	9.54	—
	2	10.81	10.80	10.68	10.56	10.66	10.76	10.09	—
	7	15.15	14.98	14.76	14.54	14.43	14.31	13.32	6.28
	10	18.95	18.20	17.44	16.68	15.95	15.22	14.14	6.25
	12	21.48	20.35	19.23	18.11	16.97	15.83	14.69	6.23
	15	20.80	19.71	18.57	17.44	16.37	15.31	14.25	6.73
20	19.68	18.63	17.47	16.31	15.38	14.45	13.52	7.57	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	3.29	3.53	3.77	4.01	4.33	4.64	—	—
	-20	3.47	3.69	3.95	4.21	4.43	4.65	—	—
	-15	3.65	3.85	4.13	4.41	4.54	4.66	4.68	—
	-10	3.70	3.89	4.13	4.37	4.50	4.62	4.66	—
	-7	3.74	3.91	4.13	4.35	4.48	4.60	4.65	—
	-2	3.82	3.94	4.11	4.27	4.35	4.42	4.54	—
	2	3.42	3.58	3.79	3.99	4.11	4.22	4.34	—
	7	4.01	4.14	4.28	4.42	4.55	4.68	4.67	2.82
	10	4.42	4.47	4.54	4.62	4.65	4.68	4.66	2.68
	12	4.69	4.69	4.72	4.75	4.72	4.68	4.65	2.59
	15	4.51	4.50	4.52	4.54	4.50	4.46	4.41	2.59
20	4.21	4.18	4.18	4.18	4.13	4.08	4.03	2.59	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.15	2.00	1.87	1.76	1.62	1.51	—	—
	-20	2.39	2.21	2.07	1.95	1.79	1.66	—	—
	-15	2.60	2.41	2.25	2.11	1.96	1.81	1.61	—
	-10	2.70	2.53	2.38	2.25	2.11	1.98	1.80	—
	-7	2.76	2.61	2.46	2.33	2.21	2.09	1.91	—
	-2	3.05	2.89	2.72	2.56	2.43	2.31	2.10	—
	2	3.16	3.02	2.82	2.65	2.60	2.55	2.32	—
	7	3.78	3.62	3.45	3.29	3.17	3.06	2.85	2.23
	10	4.29	4.07	3.84	3.61	3.43	3.25	3.04	2.33
	12	4.58	4.34	4.07	3.81	3.60	3.38	3.16	2.41
	15	4.61	4.38	4.11	3.84	3.64	3.44	3.23	2.60
20	4.68	4.46	4.18	3.90	3.72	3.54	3.35	2.92	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1401H(R)W-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	7.68	7.67	7.66	7.65	7.63	7.61	—	—
	-20	8.91	8.88	8.84	8.81	8.54	8.28	—	—
	-15	10.14	10.08	10.02	9.96	9.45	8.94	7.95	—
	-10	12.36	11.94	11.57	11.20	10.56	9.92	8.97	—
	-7	13.69	13.05	12.50	11.94	11.22	10.50	9.58	—
	-2	15.65	14.89	14.17	13.45	12.66	11.87	10.64	—
	2	16.93	16.13	15.45	14.77	13.85	12.93	11.53	—
	7	19.41	18.39	17.35	16.30	15.31	14.31	13.32	6.28
	10	20.65	19.57	18.48	17.39	16.30	15.22	14.14	6.25
	12	21.48	20.35	19.23	18.11	16.97	15.83	14.69	6.23
	15	20.80	19.71	18.57	17.44	16.37	15.31	14.25	6.73
20	19.68	18.63	17.47	16.31	15.38	14.45	13.52	7.57	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	3.46	3.70	3.95	4.19	4.50	4.81	—	—
	-20	3.62	3.88	4.13	4.38	4.60	4.82	—	—
	-15	3.79	4.05	4.31	4.57	4.70	4.82	4.81	—
	-10	4.21	4.35	4.54	4.73	4.78	4.82	4.82	—
	-7	4.46	4.53	4.68	4.83	4.83	4.82	4.82	—
	-2	4.66	4.69	4.76	4.83	4.82	4.80	4.81	—
	2	4.61	4.62	4.66	4.69	4.69	4.68	4.67	—
	7	4.74	4.73	4.72	4.70	4.69	4.68	4.67	2.82
	10	4.71	4.71	4.72	4.73	4.71	4.68	4.66	2.68
	12	4.69	4.69	4.72	4.75	4.72	4.68	4.65	2.59
	15	4.51	4.50	4.52	4.54	4.50	4.46	4.41	2.59
20	4.21	4.18	4.18	4.18	4.13	4.08	4.03	2.59	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.22	2.07	1.94	1.83	1.70	1.58	—	—
	-20	2.46	2.29	2.14	2.01	1.86	1.72	—	—
	-15	2.68	2.49	2.32	2.18	2.01	1.85	1.65	—
	-10	2.94	2.74	2.55	2.37	2.21	2.06	1.86	—
	-7	3.07	2.88	2.67	2.47	2.33	2.18	1.99	—
	-2	3.36	3.17	2.98	2.78	2.63	2.47	2.21	—
	2	3.68	3.49	3.32	3.15	2.96	2.76	2.47	—
	7	4.09	3.89	3.68	3.47	3.26	3.06	2.85	2.23
	10	4.38	4.16	3.92	3.68	3.47	3.25	3.04	2.33
	12	4.58	4.34	4.07	3.81	3.60	3.38	3.16	2.41
	15	4.61	4.38	4.11	3.84	3.64	3.44	3.23	2.60
20	4.68	4.46	4.18	3.90	3.72	3.54	3.35	2.92	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1401H(R)W-E

Cooling capacity and power input

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	11.60	12.46	13.44	13.90	14.76
	27	11.11	11.96	13.04	13.38	14.24
	30	10.89	11.74	12.87	13.16	14.01
	35	10.54	11.39	12.59	12.79	13.64
	40	7.09	8.01	9.02	9.54	10.47
	43	6.62	7.47	8.54	8.89	9.74

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	2.99	3.02	3.01	3.08	3.11
	27	3.65	3.70	3.78	3.79	3.84
	30	3.94	4.00	4.12	4.10	4.16
	35	4.41	4.48	4.67	4.61	4.68
	40	3.65	3.65	3.64	3.65	3.65
	43	3.65	3.65	3.64	3.65	3.65

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	3.88	4.12	4.47	4.52	4.75
	27	3.04	3.23	3.45	3.53	3.71
	30	2.77	2.94	3.13	3.21	3.37
	35	2.39	2.54	2.70	2.78	2.91
	40	1.94	2.19	2.48	2.61	2.87
	43	1.81	2.05	2.35	2.44	2.67

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-801H8(R)W-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	4.22	4.22	4.23	4.23	4.24	4.24	—	—
	-20	5.12	5.10	5.08	5.06	5.03	5.01	—	—
	-15	6.03	5.98	5.93	5.88	5.83	5.78	5.88	—
	-10	6.90	6.86	6.83	6.79	6.75	6.72	6.77	—
	-7	7.42	7.39	7.36	7.34	7.31	7.28	7.30	—
	-2	8.13	8.14	8.15	8.16	8.17	8.17	8.18	—
	2	8.70	8.74	8.78	8.82	8.85	8.89	8.89	—
	7	12.40	12.27	12.15	12.02	11.90	11.77	11.65	5.50
	10	13.00	12.86	12.72	12.58	12.45	12.31	12.17	5.95
	12	13.40	13.25	13.11	12.96	12.82	12.67	12.52	6.26
	15	14.00	13.84	13.68	13.53	13.37	13.21	13.05	6.71
20	13.68	13.63	13.58	13.54	13.49	13.44	13.39	7.47	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	1.95	2.13	2.32	2.50	2.69	2.87	—	—
	-20	2.04	2.23	2.42	2.62	2.81	3.01	—	—
	-15	2.13	2.33	2.53	2.74	2.94	3.14	3.42	—
	-10	2.16	2.40	2.63	2.87	3.10	3.34	3.50	—
	-7	2.19	2.44	2.70	2.95	3.21	3.46	3.55	—
	-2	2.23	2.47	2.71	2.95	3.20	3.44	3.63	—
	2	2.26	2.49	2.72	2.96	3.19	3.42	3.70	—
	7	2.40	2.68	2.96	3.24	3.51	3.79	4.07	2.54
	10	2.38	2.66	2.94	3.23	3.51	3.79	4.07	2.54
	12	2.36	2.65	2.93	3.22	3.50	3.79	4.08	2.54
	15	2.34	2.63	2.92	3.21	3.50	3.79	4.08	2.53
20	2.52	2.78	3.05	3.31	3.58	3.84	4.11	2.53	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.17	1.98	1.83	1.69	1.58	1.48	—	—
	-20	2.52	2.29	2.09	1.93	1.79	1.67	—	—
	-15	2.83	2.57	2.34	2.15	1.98	1.84	1.72	—
	-10	3.19	2.86	2.59	2.37	2.18	2.01	1.93	—
	-7	3.39	3.03	2.73	2.49	2.28	2.10	2.05	—
	-2	3.65	3.30	3.01	2.76	2.56	2.38	2.25	—
	2	3.85	3.51	3.22	2.98	2.78	2.60	2.40	—
	7	5.16	4.58	4.11	3.72	3.39	3.11	2.86	2.17
	10	5.46	4.83	4.32	3.90	3.55	3.25	2.99	2.35
	12	5.67	5.00	4.47	4.03	3.66	3.34	3.07	2.47
	15	5.98	5.26	4.69	4.21	3.82	3.49	3.20	2.65
20	5.44	4.90	4.46	4.09	3.77	3.50	3.26	2.95	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-801H8(R)W-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	4.78	4.76	4.75	4.73	4.72	4.70	—	—
	-20	5.68	5.64	5.60	5.56	5.52	5.49	—	—
	-15	6.58	6.52	6.46	6.40	6.33	6.27	6.28	—
	-10	7.65	7.59	7.53	7.47	7.41	7.35	7.42	—
	-7	8.29	8.23	8.17	8.12	8.06	8.00	8.11	—
	-2	9.65	9.58	9.51	9.45	9.38	9.31	9.25	—
	2	10.74	10.66	10.59	10.51	10.44	10.36	10.17	—
	7	12.40	12.27	12.15	12.02	11.90	11.77	11.65	5.50
	10	13.00	12.86	12.72	12.58	12.45	12.31	12.17	5.95
	12	13.40	13.25	13.11	12.96	12.82	12.67	12.52	6.26
	15	14.00	13.84	13.68	13.53	13.37	13.21	13.05	6.71
20	13.68	13.63	13.58	13.54	13.49	13.44	13.39	7.47	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.09	2.26	2.44	2.61	2.79	2.96	—	—
	-20	2.16	2.35	2.54	2.73	2.91	3.10	—	—
	-15	2.24	2.44	2.64	2.84	3.04	3.24	3.51	—
	-10	2.30	2.53	2.76	2.99	3.22	3.45	3.64	—
	-7	2.33	2.58	2.83	3.08	3.32	3.57	3.72	—
	-2	2.46	2.70	2.94	3.18	3.42	3.65	3.85	—
	2	2.57	2.80	3.03	3.26	3.49	3.72	3.96	—
	7	2.40	2.68	2.96	3.24	3.51	3.79	4.07	2.54
	10	2.38	2.66	2.94	3.23	3.51	3.79	4.07	2.54
	12	2.36	2.65	2.93	3.22	3.50	3.79	4.08	2.54
	15	2.34	2.63	2.92	3.21	3.50	3.79	4.08	2.53
20	2.52	2.78	3.05	3.31	3.58	3.84	4.11	2.53	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.29	2.11	1.95	1.81	1.69	1.59	—	—
	-20	2.63	2.40	2.21	2.04	1.90	1.77	—	—
	-15	2.94	2.67	2.45	2.25	2.08	1.94	1.79	—
	-10	3.33	3.00	2.73	2.50	2.30	2.13	2.04	—
	-7	3.55	3.19	2.89	2.64	2.43	2.24	2.18	—
	-2	3.91	3.55	3.24	2.97	2.75	2.55	2.40	—
	2	4.18	3.81	3.49	3.22	2.99	2.78	2.57	—
	7	5.16	4.58	4.11	3.72	3.39	3.11	2.86	2.17
	10	5.46	4.83	4.32	3.90	3.55	3.25	2.99	2.35
	12	5.67	5.00	4.47	4.03	3.66	3.34	3.07	2.47
	15	5.98	5.26	4.69	4.21	3.82	3.49	3.20	2.65
20	5.44	4.90	4.46	4.09	3.77	3.50	3.26	2.95	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-801H8(R)W-E**Cooling capacity and power input**

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	8.07	8.74	9.41	9.88	10.58
	27	8.25	8.94	9.63	10.11	10.82
	30	7.95	8.61	9.27	9.73	10.43
	35	7.44	8.06	8.68	9.11	9.76
	40	5.81	6.89	7.97	8.43	9.12
	43	4.83	6.19	7.54	8.02	8.73

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	1.95	1.90	1.85	1.85	1.84
	27	2.38	2.37	2.37	2.37	2.38
	30	2.48	2.49	2.50	2.51	2.53
	35	2.63	2.68	2.72	2.74	2.77
	40	2.85	2.92	3.00	3.02	3.05
	43	2.98	3.07	3.16	3.18	3.22

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	4.14	4.60	5.09	5.35	5.75
	27	3.46	3.77	4.07	4.26	4.54
	30	3.21	3.46	3.71	3.88	4.12
	35	2.83	3.01	3.19	3.33	3.52
	40	2.04	2.36	2.66	2.79	2.99
	43	1.62	2.01	2.39	2.52	2.71

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1101H8(R)W-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	5.43	5.37	5.31	5.26	5.20	5.14	—	—
	-20	6.45	6.40	6.35	6.30	6.25	6.20	—	—
	-15	7.48	7.43	7.39	7.34	7.30	7.25	7.28	—
	-10	8.43	8.41	8.39	8.37	8.35	8.33	8.29	—
	-7	9.00	8.99	8.99	8.98	8.98	8.97	8.89	—
	-2	9.32	9.43	9.55	9.67	9.79	9.91	9.90	—
	2	9.57	9.79	10.01	10.23	10.44	10.66	10.70	—
	7	15.63	15.50	15.37	15.24	15.10	14.97	14.84	5.50
	10	16.31	16.17	16.03	15.89	15.74	15.60	15.46	5.95
	12	16.77	16.62	16.47	16.32	16.17	16.02	15.87	6.26
	15	17.45	17.29	17.13	16.97	16.81	16.65	16.49	6.71
20	16.88	16.81	16.75	16.68	16.62	16.55	16.49	7.47	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.27	2.54	2.82	3.09	3.37	3.64	—	—
	-20	2.40	2.68	2.96	3.23	3.51	3.79	—	—
	-15	2.54	2.82	3.10	3.38	3.65	3.93	4.26	—
	-10	2.61	2.91	3.21	3.51	3.81	4.11	4.34	—
	-7	2.65	2.96	3.28	3.59	3.91	4.22	4.38	—
	-2	2.63	2.94	3.26	3.57	3.88	4.19	4.46	—
	2	2.62	2.93	3.24	3.55	3.86	4.17	4.52	—
	7	3.35	3.66	3.97	4.28	4.59	4.90	5.21	2.54
	10	3.30	3.63	3.95	4.27	4.60	4.92	5.25	2.54
	12	3.27	3.60	3.94	4.27	4.60	4.94	5.27	2.54
	15	3.22	3.57	3.92	4.27	4.61	4.96	5.31	2.53
20	3.40	3.72	4.04	4.36	4.68	5.00	5.32	2.53	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.40	2.11	1.89	1.70	1.54	1.41	—	—
	-20	2.68	2.39	2.15	1.95	1.78	1.64	—	—
	-15	2.94	2.63	2.38	2.17	2.00	1.84	1.71	—
	-10	3.23	2.89	2.61	2.38	2.19	2.02	1.91	—
	-7	3.40	3.04	2.74	2.50	2.30	2.13	2.03	—
	-2	3.54	3.21	2.93	2.71	2.52	2.36	2.22	—
	2	3.65	3.34	3.09	2.88	2.71	2.56	2.37	—
	7	4.67	4.23	3.87	3.56	3.29	3.06	2.85	2.17
	10	4.94	4.46	4.06	3.72	3.42	3.17	2.95	2.35
	12	5.13	4.61	4.18	3.82	3.51	3.24	3.01	2.47
	15	5.42	4.84	4.37	3.98	3.64	3.36	3.11	2.65
20	4.96	4.52	4.14	3.83	3.55	3.31	3.10	2.95	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1101H8(R)W-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	6.14	6.02	5.90	5.79	5.67	5.55	—	—
	-20	7.12	7.03	6.94	6.85	6.76	6.67	—	—
	-15	8.09	8.03	7.97	7.91	7.84	7.78	7.80	—
	-10	9.64	9.57	9.49	9.42	9.35	9.27	9.25	—
	-7	10.57	10.49	10.41	10.33	10.25	10.17	10.12	—
	-2	12.34	12.21	12.07	11.94	11.80	11.66	11.57	—
	2	13.76	13.58	13.40	13.22	13.04	12.86	12.73	—
	7	15.63	15.50	15.37	15.24	15.10	14.97	14.84	5.50
	10	16.31	16.17	16.03	15.89	15.74	15.60	15.46	5.95
	12	16.77	16.62	16.47	16.32	16.17	16.02	15.87	6.26
	15	17.45	17.29	17.13	16.97	16.81	16.65	16.49	6.71
20	16.88	16.81	16.75	16.68	16.62	16.55	16.49	7.47	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.43	2.70	2.97	3.24	3.50	3.77	—	—
	-20	2.56	2.83	3.10	3.38	3.65	3.93	—	—
	-15	2.68	2.96	3.24	3.52	3.80	4.08	4.43	—
	-10	2.82	3.13	3.44	3.75	4.06	4.37	4.61	—
	-7	2.90	3.23	3.56	3.89	4.21	4.54	4.72	—
	-2	3.12	3.42	3.72	4.02	4.31	4.61	4.90	—
	2	3.30	3.57	3.85	4.12	4.40	4.67	5.04	—
	7	3.35	3.66	3.97	4.28	4.59	4.90	5.21	2.54
	10	3.30	3.63	3.95	4.27	4.60	4.92	5.25	2.54
	12	3.27	3.60	3.94	4.27	4.60	4.94	5.27	2.54
	15	3.22	3.57	3.92	4.27	4.61	4.96	5.31	2.53
20	3.40	3.72	4.04	4.36	4.68	5.00	5.32	2.53	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.52	2.23	1.99	1.79	1.62	1.47	—	—
	-20	2.78	2.48	2.23	2.03	1.85	1.70	—	—
	-15	3.02	2.71	2.46	2.25	2.06	1.91	1.76	—
	-10	3.42	3.06	2.76	2.51	2.30	2.12	2.01	—
	-7	3.64	3.25	2.93	2.66	2.43	2.24	2.15	—
	-2	3.96	3.57	3.25	2.97	2.74	2.53	2.36	—
	2	4.18	3.80	3.49	3.21	2.97	2.75	2.53	—
	7	4.67	4.23	3.87	3.56	3.29	3.06	2.85	2.17
	10	4.94	4.46	4.06	3.72	3.42	3.17	2.95	2.35
	12	5.13	4.61	4.18	3.82	3.51	3.24	3.01	2.47
	15	5.42	4.84	4.37	3.98	3.64	3.36	3.11	2.65
20	4.96	4.52	4.14	3.83	3.55	3.31	3.10	2.95	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1101H8(R)W-E

Cooling capacity and power input

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	9.40	10.17	10.94	11.49	12.32
	27	9.68	10.48	11.28	11.83	12.65
	30	9.35	10.13	10.91	11.43	12.21
	35	8.81	9.55	10.28	10.76	11.47
	40	6.90	8.06	9.22	9.81	10.70
	43	5.75	7.17	8.58	9.24	10.23

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	2.33	2.35	2.36	2.33	2.28
	27	2.92	2.96	2.99	2.99	2.99
	30	3.06	3.11	3.15	3.17	3.19
	35	3.29	3.36	3.42	3.46	3.52
	40	3.50	3.60	3.70	3.75	3.81
	43	3.62	3.75	3.87	3.92	3.99

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	4.03	4.34	4.64	4.94	5.40
	27	3.32	3.55	3.77	3.95	4.23
	30	3.06	3.26	3.46	3.61	3.83
	35	2.68	2.85	3.01	3.11	3.26
	40	1.97	2.24	2.49	2.62	2.80
	43	1.59	1.91	2.22	2.36	2.56

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1401H8(R)W-E

Average heating capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	7.08	7.07	7.02	6.97	6.92	6.87	—	—
	-20	8.28	8.17	8.06	7.95	7.84	7.73	—	—
	-15	9.48	9.27	9.30	9.32	9.35	9.37	9.49	—
	-10	10.01	9.85	10.07	10.30	10.52	10.75	10.14	—
	-7	10.33	10.19	10.54	10.88	11.23	11.57	11.30	—
	-2	11.67	11.38	11.79	12.19	12.60	13.00	13.30	—
	2	10.81	10.80	10.86	10.92	10.98	11.04	11.71	—
	7	15.15	14.98	15.11	15.24	15.37	15.50	15.63	6.28
	10	18.95	18.20	18.19	18.18	18.17	18.16	18.15	6.25
	12	21.48	20.35	20.25	20.14	20.04	19.93	19.83	6.23
	15	21.25	20.35	20.09	19.83	19.58	19.32	19.06	6.73
20	20.86	20.35	19.84	19.33	18.81	18.30	17.79	7.57	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	3.29	3.53	3.77	4.01	4.24	4.48	—	—
	-20	3.47	3.69	3.92	4.16	4.39	4.62	—	—
	-15	3.65	3.85	4.12	4.40	4.67	4.94	5.38	—
	-10	3.70	3.89	4.20	4.51	4.83	5.14	5.38	—
	-7	3.74	3.91	4.25	4.59	4.92	5.26	5.66	—
	-2	3.82	3.94	4.32	4.70	5.07	5.45	6.02	—
	2	3.42	3.58	3.90	4.23	4.55	4.87	5.38	—
	7	4.01	4.14	4.51	4.87	5.24	5.60	5.97	2.82
	10	4.42	4.47	4.85	5.23	5.61	5.99	6.37	2.68
	12	4.69	4.69	5.08	5.47	5.86	6.25	6.64	2.59
	15	4.54	4.64	4.98	5.32	5.66	6.01	6.35	2.59
20	4.29	4.55	4.81	5.08	5.34	5.60	5.86	2.59	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.15	2.00	1.86	1.74	1.63	1.53	—	—
	-20	2.39	2.21	2.05	1.91	1.79	1.67	—	—
	-15	2.60	2.41	2.25	2.12	2.00	1.90	1.76	—
	-10	2.70	2.53	2.40	2.28	2.18	2.09	1.89	—
	-7	2.76	2.61	2.48	2.37	2.28	2.20	2.00	—
	-2	3.05	2.89	2.73	2.60	2.48	2.39	2.21	—
	2	3.16	3.02	2.78	2.58	2.41	2.27	2.18	—
	7	3.78	3.62	3.35	3.13	2.94	2.77	2.62	2.23
	10	4.29	4.07	3.75	3.48	3.24	3.03	2.85	2.33
	12	4.58	4.34	3.99	3.68	3.42	3.19	2.99	2.41
	15	4.68	4.39	4.03	3.73	3.46	3.22	3.00	2.60
20	4.87	4.47	4.12	3.81	3.52	3.27	3.03	2.92	

* Heating capacity and power input are include defrost cycle data.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1401H8(R)W-E

Heating peak capacity and power input

Capacity (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	7.68	7.67	7.68	7.69	7.69	7.70	—	—
	-20	8.91	8.88	8.82	8.77	8.72	8.67	—	—
	-15	10.14	10.08	10.07	10.07	10.06	10.05	10.20	—
	-10	12.36	11.94	11.90	11.86	11.82	11.78	11.82	—
	-7	13.69	13.05	12.99	12.93	12.87	12.81	12.86	—
	-2	15.65	14.89	14.79	14.68	14.58	14.47	14.43	—
	2	16.93	16.13	16.15	16.17	16.18	16.20	15.72	—
	7	19.41	18.39	18.27	18.14	18.02	17.89	17.77	6.28
	10	20.65	19.57	19.45	19.34	19.23	19.11	19.00	6.25
	12	21.48	20.35	20.25	20.14	20.04	19.93	19.83	6.23
	15	21.25	20.35	20.09	19.83	19.58	19.32	19.06	6.73
20	20.86	20.35	19.84	19.33	18.81	18.30	17.79	7.57	

Power input (kW)		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	3.46	3.70	3.95	4.20	4.44	4.69	—	—
	-20	3.62	3.88	4.12	4.37	4.62	4.87	—	—
	-15	3.79	4.05	4.32	4.60	4.87	5.14	5.62	—
	-10	4.21	4.35	4.61	4.88	5.14	5.40	5.87	—
	-7	4.46	4.53	4.79	5.05	5.30	5.56	6.10	—
	-2	4.66	4.69	4.96	5.23	5.50	5.77	6.32	—
	2	4.61	4.62	4.99	5.36	5.73	6.10	6.46	—
	7	4.74	4.73	5.10	5.46	5.83	6.19	6.56	2.82
	10	4.71	4.71	5.09	5.47	5.85	6.23	6.61	2.68
	12	4.69	4.69	5.08	5.47	5.86	6.25	6.64	2.59
	15	4.54	4.64	4.98	5.32	5.66	6.01	6.35	2.59
20	4.29	4.55	4.81	5.08	5.34	5.60	5.86	2.59	

COP		LWT (°C)							
		30	35	40	45	50	55	60	65
TO (°C)	-25	2.22	2.07	1.94	1.83	1.73	1.64	—	—
	-20	2.46	2.29	2.14	2.01	1.89	1.78	—	—
	-15	2.68	2.49	2.33	2.19	2.07	1.96	1.81	—
	-10	2.94	2.74	2.58	2.43	2.30	2.18	2.02	—
	-7	3.07	2.88	2.71	2.56	2.43	2.30	2.11	—
	-2	3.36	3.17	2.98	2.81	2.65	2.51	2.28	—
	2	3.68	3.49	3.24	3.02	2.82	2.66	2.43	—
	7	4.09	3.89	3.58	3.32	3.09	2.89	2.71	2.23
	10	4.38	4.16	3.82	3.54	3.29	3.07	2.88	2.33
	12	4.58	4.34	3.99	3.68	3.42	3.19	2.99	2.41
	15	4.68	4.39	4.03	3.73	3.46	3.22	3.00	2.60
20	4.87	4.47	4.12	3.81	3.52	3.27	3.03	2.92	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Outdoor unit: HWT-1401H8(R)W-E

Cooling capacity and power input

Capacity (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	11.60	12.46	13.44	13.90	14.76
	27	11.11	11.96	13.04	13.38	14.24
	30	10.89	11.74	12.87	13.16	14.01
	35	10.54	11.39	12.59	12.79	13.64
	40	9.26	10.31	11.35	11.58	11.92
	43	8.49	9.55	10.61	10.72	10.89

Power input (kW)		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	2.99	3.02	3.01	3.08	3.11
	27	3.65	3.70	3.78	3.79	3.84
	30	3.94	4.00	4.12	4.10	4.16
	35	4.41	4.48	4.67	4.61	4.68
	40	4.71	4.76	4.81	4.68	4.48
	43	4.89	4.90	4.90	4.68	4.36

COP		LWT (°C)				
		7	10	13	15	18
TO (°C)	20	3.88	4.12	4.47	4.52	4.75
	27	3.04	3.23	3.45	3.53	3.71
	30	2.77	2.94	3.13	3.21	3.37
	35	2.39	2.54	2.70	2.78	2.91
	40	1.97	2.16	2.36	2.47	2.66
	43	1.74	1.95	2.17	2.29	2.50

* Cooling capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

2-6. Part Load Tables

Specifications part load heating capacity and input (Peak)LWT (°C) =35°C

Outdoor unit HWT-401HW-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	3.10	2.80	2.49	2.19	1.88	1.58	1.28	0.98	0.98	0.98
	-15	3.73	3.37	3.00	2.64	2.27	1.91	1.54	1.17	1.17	1.17
	-10	4.40	3.99	3.57	3.16	2.75	2.34	1.89	1.45	1.45	1.45
	-7	4.80	4.36	3.92	3.47	3.03	2.59	2.08	1.61	1.61	1.61
	-2	5.70	5.11	4.51	3.92	3.33	2.78	2.20	1.64	1.50	1.50
	2	6.42	5.71	4.99	4.28	3.56	2.93	2.30	1.67	1.04	1.04
	7	7.25	6.47	5.69	4.90	4.12	3.45	2.79	2.12	1.46	0.79
	10	7.95	7.08	6.20	5.33	4.46	3.74	3.03	2.31	1.60	0.88
	12	8.42	7.49	6.55	5.62	4.68	3.93	3.18	2.44	1.69	0.94
	15	8.63	7.70	6.77	5.84	4.91	4.13	3.36	2.58	1.80	1.03
	20	8.98	8.06	7.14	6.21	5.29	4.47	3.64	2.82	1.99	1.17

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	1.32	1.21	1.09	0.98	0.86	0.75	0.64	0.52	0.52	0.52
	-15	1.41	1.28	1.16	1.03	0.91	0.78	0.67	0.55	0.55	0.55
	-10	1.46	1.34	1.21	1.08	0.94	0.81	0.69	0.56	0.56	0.56
	-7	1.49	1.36	1.22	1.09	0.95	0.82	0.70	0.57	0.57	0.57
	-2	1.51	1.35	1.19	1.04	0.88	0.75	0.62	0.49	0.48	0.48
	2	1.52	1.35	1.17	1.00	0.82	0.69	0.56	0.43	0.30	0.30
	7	1.49	1.31	1.13	0.95	0.77	0.65	0.54	0.42	0.30	0.23
	10	1.48	1.30	1.12	0.94	0.76	0.65	0.54	0.43	0.31	0.22
	12	1.48	1.30	1.12	0.94	0.76	0.65	0.54	0.43	0.32	0.21
	15	1.48	1.30	1.12	0.93	0.75	0.64	0.53	0.42	0.31	0.20
	20	1.48	1.30	1.11	0.93	0.74	0.63	0.52	0.41	0.30	0.19

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	2.35	2.32	2.28	2.24	2.18	2.11	2.02	1.88	1.88	1.88
	-15	2.65	2.62	2.59	2.56	2.51	2.45	2.32	2.13	2.13	2.13
	-10	3.01	2.98	2.96	2.94	2.91	2.89	2.73	2.56	2.56	2.56
	-7	3.22	3.21	3.20	3.19	3.18	3.16	3.00	2.82	2.82	2.82
	-2	3.78	3.78	3.78	3.78	3.78	3.72	3.55	3.34	3.14	3.14
	2	4.22	4.24	4.26	4.30	4.34	4.25	4.11	3.88	3.47	3.47
	7	4.87	4.94	5.03	5.16	5.35	5.29	5.21	5.08	4.85	3.43
	10	5.36	5.43	5.52	5.65	5.83	5.75	5.62	5.44	5.11	4.04
	12	5.69	5.76	5.85	5.97	6.16	6.05	5.90	5.67	5.28	4.48
	15	5.83	5.93	6.06	6.25	6.52	6.43	6.30	6.10	5.77	5.07
	20	6.07	6.22	6.43	6.72	7.15	7.09	7.00	6.87	6.65	6.16

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (Peak)LWT (°C) =45°C**Outdoor unit HWT-401HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	3.37	3.41	3.08	2.76	2.43	1.75	1.40	1.05	1.05	1.05
	-10	4.06	3.68	3.30	2.92	2.54	2.16	1.73	1.29	1.29	1.29
	-7	4.48	4.06	3.65	3.23	2.82	2.40	1.92	1.44	1.44	1.44
	-2	5.32	4.76	4.21	3.66	3.10	2.68	2.22	1.77	1.77	1.77
	2	5.99	5.33	4.66	4.00	3.33	2.90	2.46	2.03	2.03	2.03
	7	6.97	6.18	5.39	4.60	3.81	3.13	2.44	2.44	2.44	2.44
	10	7.64	6.78	5.93	5.07	4.21	3.45	2.69	2.69	2.69	2.69
	12	8.09	7.19	6.29	5.38	4.48	3.67	2.86	2.86	2.86	2.86
	15	8.31	7.41	6.51	5.61	4.72	3.85	2.98	2.98	2.98	2.98
	20	8.67	7.78	6.89	6.00	5.11	4.14	3.17	3.17	3.17	3.17

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	1.60	1.46	1.32	1.18	1.04	0.90	0.77	0.64	0.63	0.63
	-10	1.69	1.54	1.39	1.23	1.08	0.95	0.82	0.67	0.67	0.67
	-7	1.73	1.58	1.43	1.27	1.12	0.97	0.83	0.69	0.68	0.68
	-2	1.79	1.60	1.42	1.24	1.06	0.93	0.80	0.67	0.67	0.67
	2	1.83	1.63	1.42	1.22	1.01	0.89	0.78	0.66	0.66	0.66
	7	1.82	1.61	1.40	1.19	0.98	0.83	0.68	0.68	0.68	0.68
	10	1.83	1.62	1.41	1.19	0.98	0.82	0.67	0.67	0.67	0.67
	12	1.84	1.63	1.41	1.20	0.98	0.82	0.66	0.66	0.66	0.66
	15	1.84	1.63	1.41	1.19	0.98	0.82	0.66	0.66	0.66	0.66
	20	1.85	1.63	1.41	1.19	0.97	0.81	0.65	0.65	0.65	0.65

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	2.11	2.33	2.33	2.34	2.34	1.94	1.82	1.64	1.67	1.67
	-10	2.41	2.39	2.38	2.36	2.35	2.28	2.10	1.92	1.92	1.92
	-7	2.59	2.58	2.56	2.54	2.51	2.47	2.31	2.09	2.12	2.12
	-2	2.98	2.97	2.96	2.95	2.93	2.89	2.78	2.63	2.64	2.64
	2	3.27	3.28	3.28	3.29	3.30	3.24	3.17	3.08	3.08	3.08
	7	3.83	3.84	3.85	3.87	3.89	3.77	3.59	3.59	3.59	3.59
	10	4.17	4.19	4.22	4.25	4.30	4.19	4.03	4.03	4.03	4.03
	12	4.40	4.42	4.46	4.50	4.57	4.48	4.33	4.33	4.33	4.33
	15	4.51	4.55	4.62	4.71	4.83	4.71	4.54	4.54	4.54	4.54
	20	4.69	4.77	4.89	5.04	5.27	5.11	4.88	4.88	4.88	4.88

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (Peak)LWT (°C) =55°C**Outdoor unit HWT-401HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	—	—	—	—	—	—	—	—	—	—
	-10	—	—	—	—	—	—	—	—	—	—
	-7	4.31	3.86	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40
	-2	4.98	4.49	4.01	3.72	3.44	3.15	2.92	2.92	2.92	2.92
	2	5.52	5.01	4.49	3.98	3.46	2.95	2.54	2.54	2.54	2.54
	7	6.51	5.77	5.04	4.30	3.56	3.11	2.67	2.22	2.22	2.22
	10	7.18	6.37	5.57	4.77	3.96	3.31	2.66	2.48	2.48	2.48
	12	7.62	6.77	5.93	5.08	4.23	3.44	2.65	2.65	2.65	2.65
	15	7.79	6.94	6.09	5.24	4.39	3.59	2.80	2.80	2.80	2.80
	20	8.06	7.21	6.36	5.51	4.66	3.85	3.04	3.04	3.04	3.04

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	—	—	—	—	—	—	—	—	—	—
	-10	—	—	—	—	—	—	—	—	—	—
	-7	2.03	1.87	1.71	1.71	1.71	1.71	1.71	1.71	1.71	1.71
	-2	2.11	1.93	1.75	1.64	1.53	1.43	1.36	1.36	1.36	1.36
	2	2.17	1.98	1.78	1.59	1.39	1.20	1.08	1.08	1.08	1.08
	7	2.15	1.91	1.67	1.43	1.19	1.07	0.96	0.84	0.84	0.84
	10	2.17	1.93	1.68	1.44	1.19	1.07	0.95	0.90	0.90	0.90
	12	2.19	1.94	1.69	1.44	1.19	1.07	0.94	0.94	0.94	0.94
	15	2.19	1.94	1.69	1.44	1.20	1.05	0.90	0.90	0.90	0.90
	20	2.18	1.94	1.70	1.45	1.21	1.02	0.83	0.83	0.83	0.83

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	—	—	—	—	—	—	—	—	—	—
	-10	—	—	—	—	—	—	—	—	—	—
	-7	2.12	2.06	1.99	1.99	1.99	1.99	1.99	1.99	1.99	1.99
	-2	2.36	2.33	2.29	2.27	2.24	2.21	2.15	2.15	2.15	2.15
	2	2.54	2.53	2.52	2.51	2.48	2.46	2.35	2.35	2.35	2.35
	7	3.03	3.02	3.01	3.01	2.99	2.90	2.79	2.64	2.64	2.64
	10	3.30	3.31	3.31	3.32	3.33	3.10	2.81	2.75	2.75	2.75
	12	3.48	3.49	3.51	3.53	3.55	3.23	2.82	2.82	2.82	2.82
	15	3.56	3.58	3.60	3.63	3.67	3.43	3.11	3.11	3.11	3.11
	20	3.70	3.72	3.75	3.79	3.85	3.77	3.66	3.66	3.66	3.66

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-401HW-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-20	1.35	—	—
	-15	1.54	1.40	—
	-10	1.63	1.46	—
	-7	1.68	1.49	1.30
	-2	2.04	1.82	1.61
	2	2.32	2.09	1.86
	7	2.85	2.53	2.20
	10	3.00	2.74	2.43
	12	3.10	2.88	2.58
	15	3.24	3.09	2.80
	20	3.49	3.44	3.18

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-20	0.64	—	—
	-15	0.66	0.77	—
	-10	0.61	0.72	—
	-7	0.58	0.70	0.81
	-2	0.59	0.71	0.84
	2	0.59	0.73	0.87
	7	0.59	0.77	0.94
	10	0.59	0.76	0.94
	12	0.58	0.76	0.94
	15	0.58	0.76	0.94
	20	0.57	0.75	0.94

COP		LWT (°C)		
		35	45	55
TO (°C)	-20	2.11	—	—
	-15	2.33	1.82	—
	-10	2.69	2.02	—
	-7	2.90	2.14	1.60
	-2	3.48	2.55	1.91
	2	3.93	2.86	2.14
	7	4.83	3.30	2.34
	10	5.12	3.59	2.58
	12	5.32	3.79	2.74
	15	5.62	4.09	2.98
	20	6.12	4.59	3.38

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C

Outdoor unit HWT-401HW-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.47	4.92	4.38	3.83	3.24	2.65	2.07	1.48	0.89	0.89
	27	5.13	4.64	4.16	3.67	3.17	2.61	2.06	1.51	0.96	0.96
	30	4.98	4.41	3.96	3.50	3.02	2.50	1.98	1.46	0.99	0.99
	35	4.74	4.33	3.91	3.50	3.08	2.57	2.06	1.55	1.04	1.04
	40	4.00	3.64	3.28	2.91	2.55	2.13	1.70	1.28	1.09	1.09
	43	3.56	3.23	2.90	2.56	2.23	1.86	1.49	1.12	1.12	1.12

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.03	0.89	0.76	0.62	0.53	0.43	0.34	0.24	0.15	0.15
	27	1.20	1.07	0.93	0.80	0.69	0.59	0.48	0.37	0.27	0.27
	30	1.27	1.14	1.01	0.87	0.76	0.66	0.55	0.42	0.33	0.33
	35	1.39	1.26	1.14	1.01	0.88	0.76	0.64	0.52	0.40	0.40
	40	1.51	1.38	1.24	1.11	0.98	0.89	0.77	0.57	0.53	0.53
	43	1.58	1.45	1.31	1.18	1.04	0.97	0.84	0.60	0.60	0.60

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.31	5.51	5.78	6.18	6.16	6.14	6.11	6.06	5.93	5.93
	27	4.28	4.36	4.46	4.59	4.58	4.47	4.31	4.05	3.60	3.60
	30	3.92	3.88	3.94	4.01	3.99	3.82	3.63	3.49	3.03	3.03
	35	3.41	3.43	3.44	3.47	3.50	3.38	3.22	2.98	2.60	2.60
	40	2.65	2.64	2.63	2.62	2.60	2.39	2.22	2.25	2.08	2.08
	43	2.25	2.23	2.21	2.18	2.14	1.93	1.77	1.87	1.87	1.87

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C**Outdoor unit HWT-401HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	6.24	5.66	5.08	4.50	3.91	3.31	2.72	2.13	1.53	0.94
	27	5.98	5.44	4.89	4.35	3.80	3.21	2.62	2.03	1.45	1.13
	30	5.87	5.27	4.75	4.22	3.69	3.13	2.56	2.00	1.43	1.19
	35	5.69	5.19	4.68	4.18	3.67	3.09	2.51	1.93	1.35	1.35
	40	5.16	4.71	4.25	3.80	3.35	2.85	2.36	1.86	1.37	1.37
	43	4.84	4.42	4.00	3.57	3.15	2.71	2.27	1.82	1.38	1.38

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.18	0.99	0.80	0.61	0.53	0.44	0.36	0.27	0.19	0.10
	27	1.30	1.13	0.96	0.80	0.69	0.58	0.48	0.38	0.27	0.23
	30	1.35	1.20	1.04	0.88	0.76	0.65	0.54	0.43	0.32	0.29
	35	1.43	1.29	1.15	1.01	0.87	0.75	0.62	0.50	0.37	0.37
	40	1.57	1.42	1.28	1.14	1.00	0.87	0.75	0.62	0.50	0.50
	43	1.65	1.51	1.36	1.22	1.07	0.95	0.83	0.70	0.58	0.58

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.29	5.72	6.35	7.38	7.44	7.53	7.66	7.88	8.29	9.40
	27	4.61	4.81	5.08	5.46	5.53	5.51	5.48	5.43	5.34	5.01
	30	4.36	4.40	4.58	4.82	4.88	4.82	4.73	4.61	4.41	4.10
	35	3.98	4.02	4.07	4.13	4.22	4.15	4.05	3.90	3.65	3.65
	40	3.29	3.30	3.32	3.34	3.36	3.27	3.15	2.98	2.73	2.73
	43	2.93	2.94	2.94	2.94	2.94	2.86	2.75	2.59	2.38	2.38

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C**Outdoor unit HWT-401HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	7.19	6.45	5.72	4.98	4.34	3.69	3.05	2.41	1.76	1.12
	27	6.79	6.09	5.38	4.67	4.06	3.46	2.85	2.24	1.64	1.29
	30	6.62	5.89	5.20	4.51	3.92	3.33	2.74	2.15	1.63	1.37
	35	6.34	5.67	4.99	4.32	3.75	3.19	2.62	2.06	1.49	1.49
	40	5.87	5.23	4.59	3.95	3.42	2.90	2.37	1.84	1.63	1.63
	43	5.59	4.97	4.35	3.73	3.23	2.72	2.22	1.71	1.71	1.71

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.13	0.95	0.78	0.60	0.52	0.43	0.35	0.26	0.18	0.09
	27	1.28	1.09	0.91	0.72	0.63	0.53	0.44	0.35	0.25	0.21
	30	1.34	1.16	0.97	0.78	0.68	0.58	0.48	0.39	0.30	0.27
	35	1.45	1.25	1.06	0.86	0.76	0.65	0.55	0.44	0.34	0.34
	40	1.59	1.39	1.19	0.99	0.87	0.75	0.63	0.52	0.48	0.48
	43	1.68	1.47	1.27	1.06	0.94	0.81	0.69	0.56	0.56	0.56

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	6.36	6.77	7.36	8.30	8.42	8.59	8.84	9.26	10.08	12.44
	27	5.31	5.57	5.93	6.48	6.48	6.48	6.48	6.49	6.49	6.25
	30	4.93	5.07	5.35	5.76	5.74	5.70	5.65	5.58	5.37	5.09
	35	4.37	4.52	4.73	5.02	4.97	4.89	4.78	4.63	4.38	4.38
	40	3.68	3.76	3.86	4.01	3.94	3.86	3.74	3.56	3.41	3.41
	43	3.33	3.37	3.43	3.52	3.45	3.36	3.23	3.05	3.05	3.05

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-401HW-E

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	4.12	4.86	5.34
	27	3.54	4.23	4.85
	30	3.29	3.95	4.65
	35	2.87	3.50	4.30
	40	2.16	2.90	3.32

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	0.78	0.79	0.80
	27	0.92	0.94	0.98
	30	0.98	1.01	1.05
	35	1.08	1.12	1.18
	40	1.16	1.21	1.14

COP		LWT (°C)		
		7	13	18
TO (°C)	20	5.28	6.15	6.68
	27	3.84	4.48	4.97
	30	3.35	3.91	4.41
	35	2.66	3.13	3.64
	40	1.87	2.39	2.90

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (Peak)LWT (°C) =35°C**Outdoor unit HWT-601HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	4.03	3.62	3.21	2.81	2.40	1.99	1.58	1.17	0.98	0.98
	-15	4.75	4.28	3.80	3.33	2.86	2.38	1.91	1.17	1.17	1.17
	-10	5.57	4.99	4.42	3.84	3.27	2.69	2.07	1.45	1.45	1.45
	-7	6.06	5.42	4.79	4.15	3.52	2.88	2.59	1.61	1.61	1.61
	-2	5.70	5.58	4.90	4.22	3.54	2.91	2.43	1.64	1.50	1.50
	2	6.42	5.71	4.99	4.28	3.56	2.93	2.30	1.67	1.04	1.04
	7	7.25	6.47	5.69	4.90	4.12	3.46	2.79	2.13	1.46	0.80
	10	7.95	7.08	6.20	5.33	4.46	3.74	3.03	2.31	1.60	0.88
	12	8.42	7.49	6.55	5.62	4.68	3.93	3.18	2.44	1.69	0.94
	15	8.63	7.70	6.77	5.84	4.91	4.13	3.36	2.58	1.80	1.03
	20	8.98	8.06	7.14	6.21	5.29	4.47	3.64	2.82	1.99	1.17

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	1.73	1.57	1.40	1.24	1.08	0.91	0.75	0.59	0.52	0.52
	-15	1.79	1.62	1.45	1.29	1.12	0.95	0.78	0.55	0.55	0.55
	-10	1.89	1.72	1.55	1.37	1.18	0.99	0.78	0.56	0.56	0.56
	-7	1.95	1.76	1.57	1.38	1.20	1.01	0.82	0.57	0.57	0.57
	-2	1.51	1.53	1.35	1.17	0.99	0.83	0.68	0.49	0.48	0.48
	2	1.52	1.35	1.17	1.00	0.82	0.69	0.56	0.43	0.30	0.30
	7	1.49	1.31	1.13	0.95	0.77	0.65	0.54	0.42	0.30	0.23
	10	1.48	1.30	1.12	0.94	0.76	0.65	0.54	0.43	0.31	0.22
	12	1.48	1.30	1.12	0.94	0.76	0.65	0.54	0.43	0.32	0.21
	15	1.48	1.30	1.12	0.93	0.75	0.64	0.53	0.42	0.31	0.20
	20	1.48	1.30	1.11	0.93	0.74	0.63	0.52	0.41	0.30	0.19

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	2.33	2.31	2.29	2.26	2.23	2.18	2.11	2.00	1.88	1.88
	-15	2.65	2.64	2.62	2.59	2.56	2.51	2.45	2.13	2.13	2.13
	-10	2.94	2.90	2.86	2.81	2.77	2.73	2.65	2.56	2.56	2.56
	-7	3.12	3.09	3.05	3.00	2.94	2.86	3.16	2.82	2.82	2.82
	-2	3.78	3.65	3.64	3.62	3.59	3.50	3.60	3.34	3.14	3.14
	2	4.22	4.24	4.26	4.30	4.34	4.25	4.11	3.88	3.47	3.47
	7	4.87	4.94	5.03	5.16	5.35	5.30	5.22	5.10	4.88	3.48
	10	5.36	5.43	5.52	5.65	5.83	5.75	5.63	5.44	5.12	4.06
	12	5.69	5.76	5.85	5.97	6.16	6.05	5.90	5.67	5.28	4.48
	15	5.83	5.93	6.06	6.25	6.52	6.43	6.30	6.10	5.77	5.07
	20	6.07	6.22	6.43	6.72	7.15	7.09	7.00	6.87	6.65	6.16

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (Peak)LWT (°C) =45°C**Outdoor unit HWT-601HW-E**

Capacity (kW)		Load (%)										
		100	90	80	70	60	50	40	30	20	10	
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—	—
	-15	4.03	3.65	3.27	2.89	2.51	2.13	1.75	1.05	1.05	1.05	
	-10	5.14	4.64	4.14	3.65	3.15	2.65	1.97	1.29	1.29	1.29	
	-7	5.80	5.23	4.67	4.10	3.53	2.97	2.40	1.44	1.44	1.44	
	-2	5.32	5.28	4.66	4.04	3.42	2.68	2.44	1.77	1.77	1.77	
	2	5.99	5.33	4.66	4.00	3.33	2.90	2.46	2.03	2.03	2.03	
	7	6.97	6.18	5.39	4.60	3.81	3.13	2.44	2.44	2.44	2.44	
	10	7.64	6.78	5.93	5.07	4.21	3.45	2.69	2.69	2.69	2.69	
	12	8.09	7.19	6.29	5.38	4.48	3.67	2.86	2.86	2.86	2.86	
	15	8.31	7.41	6.51	5.61	4.72	3.85	2.98	2.98	2.98	2.98	
	20	8.67	7.78	6.89	6.00	5.11	4.14	3.17	3.17	3.17	3.17	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	1.84	1.68	1.53	1.37	1.21	1.06	0.90	0.64	0.64	0.64
	-10	2.11	1.92	1.73	1.54	1.34	1.14	0.93	0.67	0.67	0.67
	-7	2.25	2.04	1.82	1.61	1.40	1.18	0.97	0.69	0.69	0.69
	-2	1.79	1.81	1.60	1.39	1.18	1.02	0.87	0.68	0.67	0.67
	2	1.83	1.63	1.42	1.22	1.01	0.90	0.78	0.67	0.67	0.67
	7	1.82	1.61	1.40	1.19	0.98	0.83	0.68	0.68	0.68	0.68
	10	1.83	1.62	1.41	1.19	0.98	0.82	0.67	0.67	0.67	0.67
	12	1.84	1.63	1.41	1.20	0.98	0.82	0.66	0.66	0.66	0.66
	15	1.84	1.63	1.41	1.19	0.98	0.82	0.66	0.66	0.66	0.66
	20	1.85	1.63	1.41	1.19	0.97	0.81	0.65	0.65	0.65	0.65

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	2.19	2.17	2.14	2.11	2.07	2.02	1.94	1.64	1.64	1.64
	-10	2.43	2.41	2.39	2.37	2.34	2.32	2.12	1.92	1.92	1.92
	-7	2.58	2.57	2.56	2.55	2.53	2.51	2.47	2.09	2.09	2.09
	-2	2.98	2.92	2.92	2.91	2.89	2.61	2.81	2.60	2.64	2.64
	2	3.27	3.28	3.28	3.29	3.30	3.23	3.14	3.03	3.03	3.03
	7	3.83	3.84	3.85	3.87	3.89	3.77	3.59	3.59	3.59	3.59
	10	4.17	4.19	4.22	4.25	4.30	4.19	4.03	4.03	4.03	4.03
	12	4.40	4.42	4.46	4.50	4.57	4.48	4.33	4.33	4.33	4.33
	15	4.51	4.55	4.62	4.71	4.83	4.71	4.54	4.54	4.54	4.54
	20	4.69	4.77	4.89	5.04	5.27	5.11	4.88	4.88	4.88	4.88

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (Peak)LWT (°C) =55°C**Outdoor unit HWT-601HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	—	—	—	—	—	—	—	—	—	—
	-10	—	—	—	—	—	—	—	—	—	—
	-7	5.42	4.92	4.41	3.91	3.40	3.40	3.40	3.40	3.40	3.40
	-2	5.80	5.22	4.65	4.07	3.50	3.15	2.92	2.92	2.92	2.92
	2	6.10	5.47	4.84	4.21	3.58	2.95	2.54	2.54	2.54	2.54
	7	7.53	6.74	5.94	5.15	4.35	3.56	2.89	2.22	2.22	2.22
	10	8.00	7.19	6.38	5.58	4.77	3.96	3.22	2.48	2.48	2.48
	12	8.31	7.49	6.68	5.86	5.05	4.23	3.44	2.65	2.65	2.65
	15	8.22	7.39	6.56	5.73	4.90	4.09	3.29	2.80	2.80	2.80
	20	8.06	7.21	6.36	5.51	4.66	3.85	3.04	3.04	3.04	3.04

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	—	—	—	—	—	—	—	—	—	—
	-10	—	—	—	—	—	—	—	—	—	—
	-7	2.66	2.42	2.19	1.95	1.71	1.71	1.71	1.71	1.71	1.71
	-2	2.58	2.33	2.08	1.83	1.57	1.43	1.36	1.36	1.36	1.36
	2	2.52	2.26	1.99	1.73	1.46	1.20	1.08	1.08	1.08	1.08
	7	2.61	2.33	2.04	1.76	1.47	1.19	1.02	0.84	0.84	0.84
	10	2.60	2.32	2.03	1.75	1.47	1.19	1.01	0.83	0.83	0.83
	12	2.59	2.31	2.03	1.75	1.47	1.19	1.01	0.83	0.83	0.83
	15	2.44	2.17	1.90	1.64	1.37	1.13	0.94	0.83	0.83	0.83
	20	2.18	1.94	1.70	1.45	1.21	1.02	0.83	0.83	0.83	0.83

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-20	—	—	—	—	—	—	—	—	—	—
	-15	—	—	—	—	—	—	—	—	—	—
	-10	—	—	—	—	—	—	—	—	—	—
	-7	2.04	2.03	2.02	2.01	1.99	1.99	1.99	1.99	1.99	1.99
	-2	2.25	2.24	2.24	2.23	2.22	2.21	2.15	2.15	2.15	2.15
	2	2.42	2.42	2.43	2.44	2.45	2.46	2.35	2.35	2.35	2.35
	7	2.89	2.90	2.91	2.93	2.95	2.99	2.85	2.64	2.64	2.64
	10	3.08	3.10	3.14	3.18	3.24	3.33	3.18	2.97	2.97	2.97
	12	3.21	3.24	3.29	3.35	3.43	3.55	3.41	3.19	3.19	3.19
	15	3.37	3.40	3.44	3.50	3.57	3.63	3.49	3.37	3.37	3.37
	20	3.70	3.72	3.75	3.79	3.85	3.77	3.66	3.66	3.66	3.66

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-601HW-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-20	1.93	—	—
	-15	2.08	1.92	—
	-10	2.46	2.27	—
	-7	2.69	2.48	2.04
	-2	3.18	2.97	2.56
	2	3.58	3.36	2.97
	7	4.29	4.12	3.61
	10	4.54	4.38	3.74
	12	4.71	4.55	3.82
	15	4.86	4.71	4.13
	20	5.11	4.98	4.65

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-20	0.83	—	—
	-15	0.86	1.00	—
	-10	0.89	1.05	—
	-7	0.90	1.07	1.23
	-2	0.91	1.10	1.29
	2	0.91	1.12	1.33
	7	0.92	1.15	1.39
	10	0.91	1.15	1.40
	12	0.91	1.15	1.41
	15	0.91	1.15	1.42
	20	0.91	1.16	1.44

COP		LWT (°C)		
		35	45	55
TO (°C)	-20	2.33	—	—
	-15	2.42	1.92	—
	-10	2.78	2.17	—
	-7	2.99	2.32	1.66
	-2	3.52	2.70	1.99
	2	3.93	3.00	2.23
	7	4.66	3.58	2.60
	10	4.97	3.81	2.66
	12	5.18	3.96	2.71
	15	5.34	4.08	2.91
	20	5.62	4.29	3.23

* Power input does not include water pump power.

* Heating capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C

Outdoor unit HWT-601HW-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.72	5.09	4.46	3.83	3.24	2.65	2.07	1.48	0.89	0.89
	27	5.54	4.94	4.34	3.74	3.17	2.61	2.06	1.51	0.96	0.96
	30	5.37	4.79	4.22	3.65	3.09	2.56	2.03	1.51	0.99	0.99
	35	5.33	4.77	4.21	3.64	3.08	2.57	2.06	1.55	1.04	1.04
	40	4.81	4.31	3.82	3.32	2.83	2.36	1.94	1.51	1.09	1.09
	43	4.49	4.04	3.59	3.13	2.68	2.23	1.86	1.49	1.12	1.12

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.12	0.95	0.79	0.62	0.53	0.43	0.34	0.24	0.15	0.15
	27	1.40	1.21	1.03	0.84	0.69	0.59	0.48	0.37	0.27	0.27
	30	1.51	1.32	1.13	0.94	0.78	0.67	0.55	0.44	0.33	0.33
	35	1.72	1.51	1.30	1.09	0.88	0.76	0.64	0.52	0.40	0.40
	40	1.86	1.67	1.48	1.28	1.09	0.94	0.80	0.66	0.53	0.53
	43	1.94	1.76	1.58	1.40	1.22	1.04	0.89	0.75	0.60	0.60

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.11	5.34	5.67	6.18	6.16	6.14	6.11	6.06	5.93	5.93
	27	3.96	4.07	4.23	4.46	4.58	4.47	4.31	4.05	3.60	3.60
	30	3.57	3.64	3.74	3.87	3.94	3.84	3.68	3.44	3.03	3.03
	35	3.10	3.16	3.23	3.34	3.50	3.38	3.22	2.98	2.60	2.60
	40	2.59	2.59	2.59	2.59	2.59	2.52	2.42	2.29	2.08	2.08
	43	2.31	2.29	2.27	2.24	2.20	2.14	2.08	2.00	1.87	1.87

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C**Outdoor unit HWT-601HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	6.63	5.92	5.21	4.50	3.91	3.31	2.72	2.13	1.53	0.94
	27	6.57	5.86	5.15	4.44	3.80	3.21	2.62	2.03	1.45	1.13
	30	6.45	5.77	5.08	4.40	3.77	3.19	2.60	2.02	1.43	1.19
	35	6.51	5.80	5.09	4.38	3.67	3.09	2.51	1.93	1.35	1.35
	40	6.04	5.44	4.85	4.26	3.67	3.13	2.54	1.96	1.37	1.37
	43	5.75	5.23	4.71	4.19	3.67	3.15	2.56	1.97	1.38	1.38

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.21	1.01	0.81	0.61	0.53	0.44	0.36	0.27	0.19	0.10
	27	1.48	1.26	1.05	0.84	0.69	0.58	0.48	0.38	0.27	0.23
	30	1.59	1.37	1.16	0.95	0.79	0.67	0.55	0.44	0.32	0.29
	35	1.78	1.55	1.33	1.10	0.87	0.75	0.62	0.50	0.37	0.37
	40	1.94	1.73	1.53	1.32	1.12	0.95	0.80	0.65	0.50	0.50
	43	2.03	1.84	1.65	1.45	1.26	1.07	0.91	0.74	0.58	0.58

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.48	5.86	6.43	7.38	7.44	7.53	7.66	7.88	8.29	9.40
	27	4.45	4.64	4.91	5.31	5.53	5.51	5.48	5.43	5.34	5.01
	30	4.06	4.21	4.38	4.64	4.80	4.78	4.71	4.60	4.41	4.10
	35	3.66	3.74	3.84	3.99	4.22	4.15	4.05	3.90	3.65	3.65
	40	3.12	3.14	3.18	3.23	3.29	3.30	3.18	3.01	2.73	2.73
	43	2.83	2.85	2.86	2.88	2.91	2.94	2.82	2.65	2.38	2.38

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C**Outdoor unit HWT-601HW-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	7.51	6.67	5.82	4.98	4.34	3.69	3.05	2.41	1.76	1.12
	27	7.33	6.55	5.78	5.00	4.33	3.66	2.98	2.31	1.64	1.29
	30	7.25	6.41	5.66	4.91	4.24	3.57	2.89	2.21	1.63	1.37
	35	7.12	6.42	5.72	5.02	4.32	3.61	2.91	2.20	1.49	1.49
	40	6.60	5.94	5.28	4.61	3.95	3.27	2.58	1.89	1.63	1.63
	43	6.29	5.65	5.01	4.37	3.73	3.06	2.38	1.71	1.71	1.71

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.23	1.02	0.81	0.60	0.52	0.43	0.35	0.26	0.18	0.09
	27	1.51	1.28	1.06	0.83	0.68	0.57	0.46	0.36	0.25	0.21
	30	1.62	1.38	1.15	0.93	0.75	0.63	0.51	0.40	0.30	0.27
	35	1.82	1.58	1.34	1.10	0.86	0.73	0.60	0.47	0.34	0.34
	40	1.97	1.72	1.48	1.23	0.99	0.83	0.68	0.53	0.48	0.48
	43	2.06	1.81	1.56	1.31	1.06	0.89	0.73	0.56	0.56	0.56

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	6.11	6.54	7.19	8.30	8.42	8.59	8.84	9.26	10.08	12.44
	27	4.87	5.11	5.46	6.00	6.40	6.41	6.43	6.45	6.49	6.25
	30	4.47	4.63	4.90	5.31	5.68	5.66	5.62	5.58	5.37	5.09
	35	3.91	4.06	4.27	4.56	5.02	4.95	4.84	4.68	4.38	4.38
	40	3.35	3.45	3.57	3.75	4.01	3.92	3.80	3.60	3.41	3.41
	43	3.05	3.12	3.21	3.34	3.52	3.42	3.28	3.05	3.05	3.05

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-601HW-E

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	4.12	4.86	5.34
	27	3.54	4.23	4.85
	30	3.29	3.95	4.65
	35	2.87	3.50	4.30
	40	2.16	2.90	3.32

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	0.78	0.79	0.80
	27	0.92	0.94	0.98
	30	0.98	1.01	1.05
	35	1.08	1.12	1.18
	40	1.16	1.21	1.14

COP		LWT (°C)		
		7	13	18
TO (°C)	20	5.28	6.15	6.68
	27	3.84	4.48	4.97
	30	3.35	3.91	4.41
	35	2.66	3.13	3.64
	40	1.87	2.39	2.90

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =35°C**Outdoor unit HWT-801H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.43	3.99	3.54	3.10	2.65	2.21	1.76	1.76	1.76	1.76
	-20	5.45	4.87	4.29	3.72	3.14	2.56	2.34	2.34	2.34	2.34
	-15	6.46	5.75	5.04	4.34	3.63	2.92	2.92	2.92	2.92	2.92
	-10	7.49	6.69	5.89	5.08	4.28	3.48	3.07	2.67	2.67	2.67
	-7	8.11	7.25	6.39	5.53	4.67	3.81	3.17	2.52	2.52	2.52
	-2	9.24	8.29	7.34	6.38	5.43	4.48	3.53	2.58	2.58	2.58
	2	10.30	9.20	8.11	7.01	5.91	4.81	3.72	2.62	2.62	2.62
	7	11.90	10.69	9.48	8.27	7.06	5.85	4.64	3.43	2.22	1.01
	10	12.57	11.61	10.36	9.10	7.85	6.59	5.24	3.88	2.53	1.17
	12	13.01	11.76	10.51	9.25	8.00	6.75	5.38	4.02	2.65	1.28
	15	13.22	11.97	10.73	9.48	8.23	6.99	5.60	4.22	2.83	1.45
20	13.57	12.33	11.09	9.86	8.62	7.38	5.97	4.55	3.14	1.72	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.22	2.03	1.84	1.65	1.45	1.26	1.07	1.07	1.07	1.07
	-20	2.41	2.17	1.93	1.68	1.44	1.20	1.11	1.11	1.11	1.11
	-15	2.60	2.31	2.02	1.72	1.43	1.14	1.14	1.14	1.14	1.14
	-10	2.78	2.45	2.13	1.80	1.48	1.15	1.04	0.92	0.92	0.92
	-7	2.88	2.54	2.19	1.85	1.50	1.16	0.98	0.79	0.79	0.79
	-2	2.71	2.42	2.14	1.85	1.57	1.28	0.99	0.71	0.71	0.71
	2	2.77	2.47	2.16	1.86	1.55	1.25	0.94	0.64	0.64	0.64
	7	2.62	2.36	2.10	1.85	1.59	1.33	1.07	0.82	0.56	0.30
	10	2.63	2.33	2.03	1.73	1.43	1.13	0.92	0.71	0.50	0.29
	12	2.63	2.33	2.02	1.72	1.41	1.11	0.90	0.70	0.49	0.28
	15	2.63	2.32	2.01	1.70	1.39	1.08	0.88	0.68	0.47	0.27
20	2.62	2.30	1.99	1.67	1.36	1.04	0.84	0.65	0.45	0.25	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.00	1.96	1.93	1.88	1.82	1.75	1.64	1.64	1.64	1.64
	-20	2.26	2.25	2.23	2.21	2.18	2.13	2.12	2.12	2.12	2.12
	-15	2.48	2.49	2.50	2.52	2.53	2.56	2.56	2.56	2.56	2.56
	-10	2.70	2.73	2.77	2.82	2.90	3.02	2.96	2.90	2.90	2.90
	-7	2.82	2.86	2.92	2.99	3.11	3.28	3.25	3.19	3.19	3.19
	-2	3.41	3.42	3.43	3.45	3.47	3.50	3.55	3.64	3.64	3.64
	2	3.72	3.73	3.75	3.77	3.81	3.86	3.94	4.09	4.09	4.09
	7	4.54	4.53	4.50	4.48	4.44	4.39	4.32	4.20	3.97	3.35
	10	4.77	4.98	5.10	5.26	5.49	5.85	5.71	5.49	5.08	4.07
	12	4.95	5.06	5.20	5.39	5.66	6.08	5.96	5.78	5.43	4.57
	15	5.03	5.17	5.34	5.57	5.91	6.45	6.36	6.23	5.99	5.38
20	5.18	5.35	5.58	5.89	6.36	7.10	7.08	7.05	7.01	6.88	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =45°C**Outdoor unit HWT-801H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.55	4.09	3.63	3.18	2.72	2.26	1.80	1.80	1.80	1.80
	-20	5.27	5.00	4.46	3.92	3.37	2.83	2.29	2.29	2.29	2.29
	-15	6.54	5.91	5.28	4.66	4.03	3.40	2.77	2.77	2.77	2.77
	-10	7.45	6.67	5.89	5.11	4.33	3.55	2.90	2.50	2.50	2.50
	-7	8.00	7.13	6.26	5.38	4.51	3.64	2.99	2.33	2.33	2.33
	-2	9.15	8.20	7.24	6.29	5.34	4.38	3.43	2.48	2.48	2.48
	2	10.26	9.20	8.14	7.08	6.02	4.96	3.58	2.60	2.60	2.60
	7	11.75	10.48	9.22	7.95	6.68	5.41	4.15	2.88	2.88	2.88
	10	12.36	11.44	10.17	8.90	7.63	6.37	4.73	3.10	3.10	3.10
	12	12.77	11.52	10.27	9.01	7.76	6.51	4.88	3.24	3.24	3.24
	15	12.87	11.64	10.41	9.18	7.96	6.73	5.09	3.46	3.46	3.46
20	13.03	11.84	10.65	9.47	8.28	7.09	5.46	3.82	3.82	3.82	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.68	2.43	2.18	1.93	1.68	1.43	1.18	1.18	1.18	1.18
	-20	2.83	2.66	2.38	2.10	1.82	1.54	1.26	1.26	1.26	1.26
	-15	3.21	2.90	2.59	2.28	1.96	1.65	1.34	1.34	1.34	1.34
	-10	3.31	2.95	2.58	2.22	1.86	1.49	1.25	1.12	1.12	1.12
	-7	3.37	2.98	2.58	2.19	1.79	1.40	1.19	0.98	0.98	0.98
	-2	3.26	2.93	2.59	2.26	1.93	1.59	1.26	0.92	0.92	0.92
	2	3.38	2.99	2.61	2.22	1.84	1.45	1.20	0.88	0.88	0.88
	7	3.39	3.02	2.65	2.27	1.90	1.53	1.16	0.79	0.79	0.79
	10	3.38	2.97	2.58	2.18	1.79	1.40	1.09	0.77	0.77	0.77
	12	3.37	2.98	2.58	2.19	1.79	1.40	1.08	0.76	0.76	0.76
	15	3.39	2.99	2.59	2.19	1.79	1.40	1.07	0.75	0.75	0.75
20	3.42	3.01	2.61	2.20	1.80	1.39	1.06	0.72	0.72	0.72	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.70	1.68	1.67	1.65	1.62	1.58	1.53	1.53	1.53	1.53
	-20	1.86	1.88	1.87	1.86	1.85	1.84	1.81	1.81	1.81	1.81
	-15	2.04	2.04	2.04	2.05	2.05	2.06	2.07	2.07	2.07	2.07
	-10	2.25	2.26	2.28	2.30	2.33	2.38	2.33	2.24	2.24	2.24
	-7	2.37	2.40	2.42	2.46	2.52	2.60	2.51	2.38	2.38	2.38
	-2	2.81	2.80	2.79	2.78	2.77	2.75	2.73	2.68	2.68	2.68
	2	3.04	3.07	3.12	3.19	3.28	3.42	2.99	2.95	2.95	2.95
	7	3.47	3.47	3.48	3.50	3.51	3.54	3.58	3.67	3.67	3.67
	10	3.66	3.86	3.95	4.07	4.26	4.54	4.35	4.02	4.02	4.02
	12	3.79	3.87	3.98	4.12	4.33	4.65	4.51	4.26	4.26	4.26
	15	3.80	3.89	4.02	4.19	4.43	4.82	4.76	4.64	4.64	4.64
20	3.81	3.93	4.09	4.30	4.61	5.10	5.17	5.31	5.31	5.31	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =55°C

Outdoor unit HWT-801H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.67	4.19	3.70	3.22	2.73	2.25	1.76	1.76	1.76	1.76
	-20	5.54	4.99	4.44	3.89	3.34	2.79	2.24	2.24	2.24	2.24
	-15	6.41	5.79	5.18	4.56	3.94	3.33	2.71	2.71	2.71	2.71
	-10	7.00	6.29	5.58	4.86	4.15	3.44	2.82	2.35	2.35	2.35
	-7	7.35	6.58	5.81	5.05	4.28	3.51	2.88	2.14	2.14	2.14
	-2	8.79	7.89	6.99	6.08	5.18	4.28	3.38	2.47	2.47	2.47
	2	9.50	8.53	7.56	6.59	5.62	4.65	3.71	2.74	2.74	2.74
	7	9.96	8.95	7.94	6.93	5.91	4.90	3.89	2.88	2.88	2.88
	10	10.76	9.59	8.42	7.26	6.09	5.05	4.01	2.96	2.96	2.96
	12	11.29	10.02	8.75	7.48	6.21	5.15	4.08	3.02	3.02	3.02
	15	11.36	10.13	8.91	7.68	6.46	5.39	4.31	3.24	3.24	3.24
20	11.47	10.32	9.17	8.02	6.87	5.78	4.70	3.61	3.61	3.61	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	3.27	2.96	2.64	2.33	2.01	1.70	1.38	1.38	1.38	1.38
	-20	3.36	3.04	2.73	2.42	2.11	1.80	1.49	1.49	1.49	1.49
	-15	3.44	3.13	2.82	2.52	2.21	1.90	1.59	1.59	1.59	1.59
	-10	3.54	3.18	2.83	2.47	2.11	1.76	1.54	1.33	1.33	1.33
	-7	3.60	3.21	2.83	2.44	2.06	1.67	1.52	1.17	1.17	1.17
	-2	3.65	3.30	2.95	2.60	2.25	1.90	1.55	1.20	1.20	1.20
	2	3.56	3.19	2.83	2.46	2.10	1.73	1.56	1.23	1.23	1.23
	7	3.47	3.14	2.80	2.47	2.13	1.80	1.46	1.13	1.13	1.13
	10	3.47	3.08	2.68	2.29	1.89	1.61	1.34	1.06	1.06	1.06
	12	3.47	3.04	2.60	2.17	1.73	1.49	1.26	1.02	1.02	1.02
	15	3.46	3.03	2.60	2.17	1.73	1.49	1.25	1.01	1.01	1.01
20	3.44	3.02	2.59	2.17	1.74	1.49	1.24	0.99	0.99	0.99	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.43	1.42	1.40	1.38	1.36	1.32	1.28	1.28	1.28	1.28
	-20	1.65	1.64	1.62	1.61	1.58	1.55	1.51	1.51	1.51	1.51
	-15	1.86	1.85	1.83	1.81	1.79	1.75	1.70	1.70	1.70	1.70
	-10	1.98	1.97	1.97	1.97	1.97	1.96	1.83	1.77	1.77	1.77
	-7	2.04	2.05	2.06	2.07	2.08	2.10	1.90	1.83	1.83	1.83
	-2	2.41	2.39	2.37	2.34	2.30	2.25	2.17	2.06	2.06	2.06
	2	2.67	2.67	2.67	2.68	2.68	2.69	2.37	2.23	2.23	2.23
	7	2.87	2.85	2.83	2.81	2.78	2.73	2.67	2.56	2.56	2.56
	10	3.10	3.12	3.14	3.18	3.22	3.13	2.99	2.79	2.79	2.79
	12	3.25	3.30	3.37	3.45	3.59	3.45	3.25	2.96	2.96	2.96
	15	3.28	3.35	3.43	3.55	3.72	3.61	3.45	3.21	3.21	3.21
20	3.33	3.42	3.54	3.70	3.95	3.88	3.79	3.65	3.65	3.65	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-801H(R)W-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	2.58	2.37	2.39
	-20	3.12	2.92	2.91
	-15	3.65	3.46	3.43
	-10	3.75	3.51	3.45
	-7	3.81	3.54	3.46
	-2	4.55	4.26	4.02
	2	5.15	4.84	4.46
	7	5.93	5.62	5.36
	10	6.29	5.99	5.74
	12	6.54	6.24	5.99
	15	6.90	6.62	6.36
	20	7.51	7.24	6.99

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	1.37	1.59	1.91
	-20	1.44	1.66	1.98
	-15	1.51	1.73	2.05
	-10	1.36	1.58	1.89
	-7	1.28	1.50	1.79
	-2	1.20	1.44	1.77
	2	1.14	1.39	1.75
	7	1.10	1.42	1.72
	10	1.09	1.41	1.72
	12	1.08	1.40	1.73
	15	1.06	1.40	1.73
	20	1.04	1.38	1.74

COP		LWT (°C)		
		35	45	55
TO (°C)	-25	1.88	1.49	1.25
	-20	2.16	1.76	1.47
	-15	2.42	2.00	1.67
	-10	2.77	2.23	1.84
	-7	2.98	2.36	1.93
	-2	3.79	2.96	2.27
	2	4.52	3.48	2.55
	7	5.39	3.96	3.12
	10	5.80	4.25	3.33
	12	6.07	4.44	3.47
	15	6.49	4.74	3.67
	20	7.22	5.25	4.02

* Power input does not include water pump power.

* Heating capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C

Outdoor unit HWT-801H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	7.79	6.99	6.19	5.39	4.59	3.78	2.98	2.18	1.38	1.38
	27	7.30	6.57	5.84	5.11	4.38	3.65	2.93	2.20	1.47	1.47
	30	7.08	6.39	5.69	4.99	4.30	3.60	2.90	2.20	1.51	1.51
	35	6.73	6.09	5.44	4.80	4.15	3.51	2.86	2.22	1.57	1.57
	40	5.54	5.00	4.47	3.93	3.39	2.86	2.32	2.08	1.84	1.84
	43	4.82	4.35	3.88	3.41	2.94	2.47	2.00	2.00	2.00	2.00

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.71	1.53	1.34	1.16	0.98	0.79	0.61	0.42	0.24	0.24
	27	1.93	1.74	1.55	1.36	1.17	0.98	0.79	0.60	0.41	0.41
	30	2.03	1.84	1.64	1.45	1.26	1.06	0.87	0.67	0.48	0.48
	35	2.19	1.99	1.79	1.59	1.40	1.20	1.00	0.80	0.60	0.60
	40	2.40	2.16	1.92	1.68	1.44	1.20	0.96	0.88	0.81	0.81
	43	2.53	2.26	2.00	1.73	1.46	1.20	0.93	0.93	0.93	0.93

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.56	4.58	4.61	4.65	4.70	4.78	4.91	5.15	5.75	5.75
	27	3.77	3.77	3.76	3.75	3.74	3.73	3.71	3.67	3.60	3.60
	30	3.49	3.48	3.46	3.45	3.42	3.39	3.34	3.27	3.14	3.14
	35	3.07	3.06	3.03	3.01	2.97	2.93	2.87	2.77	2.62	2.62
	40	2.30	2.31	2.33	2.34	2.36	2.39	2.43	2.36	2.28	2.28
	43	1.91	1.92	1.94	1.97	2.01	2.06	2.15	2.15	2.15	2.15

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C

Outdoor unit HWT-801H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	8.97	8.10	7.22	6.35	5.47	4.60	3.72	2.85	1.97	1.1
	27	8.49	7.64	6.79	5.94	5.09	4.24	3.39	2.54	2.08	1.61
	30	8.28	7.44	6.61	5.77	4.93	4.09	3.25	2.41	2.12	1.83
	35	7.94	7.12	6.30	5.48	4.65	3.83	3.01	2.19	2.19	2.19
	40	7.00	6.27	5.55	4.83	4.11	3.39	2.67	2.36	2.36	2.36
	43	6.43	5.77	5.11	4.45	3.78	3.12	2.46	2.46	2.46	2.46

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.77	1.59	1.41	1.23	1.05	0.88	0.70	0.52	0.34	0.16
	27	1.99	1.79	1.58	1.37	1.16	0.95	0.75	0.54	0.44	0.35
	30	2.09	1.87	1.65	1.43	1.21	0.99	0.77	0.55	0.49	0.43
	35	2.25	2.01	1.77	1.53	1.28	1.04	0.80	0.56	0.56	0.56
	40	2.50	2.23	1.96	1.68	1.41	1.14	0.87	0.78	0.78	0.78
	43	2.65	2.36	2.07	1.78	1.49	1.20	0.91	0.91	0.91	0.91

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.07	5.09	5.11	5.15	5.19	5.25	5.34	5.50	5.83	6.88
	27	4.26	4.28	4.30	4.34	4.38	4.45	4.55	4.73	4.69	4.64
	30	3.96	3.98	4.01	4.04	4.08	4.14	4.24	4.41	4.36	4.28
	35	3.53	3.54	3.56	3.59	3.62	3.68	3.76	3.91	3.91	3.91
	40	2.80	2.82	2.84	2.87	2.91	2.97	3.07	3.03	3.03	3.03
	43	2.43	2.44	2.47	2.50	2.54	2.60	2.70	2.70	2.70	2.70

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C

Outdoor unit HWT-801H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	10.09	9.02	7.95	6.88	5.81	4.74	3.67	2.60	1.53	1.53
	27	9.51	8.53	7.55	6.56	5.58	4.60	3.62	2.63	2.06	2.06
	30	9.26	8.32	7.37	6.43	5.48	4.54	3.59	2.65	2.29	2.29
	35	8.85	7.97	7.08	6.20	5.32	4.44	3.55	2.67	2.67	2.67
	40	8.04	7.23	6.43	5.62	4.81	4.00	3.19	2.86	2.86	2.86
	43	7.56	6.80	6.03	5.27	4.50	3.74	2.97	2.97	2.97	2.97

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.71	1.51	1.31	1.11	0.92	0.72	0.52	0.32	0.12	0.12
	27	1.98	1.76	1.53	1.31	1.08	0.86	0.64	0.41	0.31	0.31
	30	2.10	1.86	1.63	1.39	1.16	0.92	0.69	0.45	0.39	0.39
	35	2.29	2.04	1.78	1.53	1.28	1.03	0.77	0.52	0.52	0.52
	40	2.54	2.26	1.97	1.69	1.41	1.12	0.84	0.75	0.75	0.75
	43	2.69	2.39	2.09	1.79	1.48	1.18	0.88	0.88	0.88	0.88

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.90	5.97	6.06	6.18	6.35	6.62	7.09	8.16	12.75	12.75
	27	4.80	4.86	4.92	5.02	5.15	5.34	5.68	6.38	6.72	6.72
	30	4.42	4.47	4.53	4.62	4.74	4.92	5.22	5.84	5.92	5.92
	35	3.86	3.91	3.97	4.05	4.16	4.32	4.60	5.13	5.13	5.13
	40	3.17	3.21	3.26	3.32	3.42	3.56	3.80	3.84	3.84	3.84
	43	2.81	2.85	2.89	2.95	3.03	3.16	3.38	3.38	3.38	3.38

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-801H(R)W-E

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	5.70	6.47	7.12
	27	5.20	6.03	6.72
	30	4.98	5.83	6.55
	35	4.62	5.51	6.26
	40	3.99	4.90	5.67

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	0.91	0.89	0.87
	27	1.12	1.11	1.10
	30	1.22	1.21	1.20
	35	1.37	1.36	1.36
	40	1.53	1.54	1.55

COP		LWT (°C)		
		7	13	18
TO (°C)	20	6.26	7.29	8.18
	27	4.62	5.43	6.12
	30	4.09	4.84	5.47
	35	3.37	4.04	4.60
	40	2.60	3.18	3.65

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =35°C

Outdoor unit HWT-1101H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	5.20	4.71	4.22	3.73	3.23	2.74	2.25	1.76	1.76	1.76
	-20	6.29	5.67	5.05	4.44	3.82	3.20	2.59	2.34	2.34	2.34
	-15	7.37	6.63	5.89	5.15	4.40	3.66	2.92	2.92	2.92	2.92
	-10	8.45	7.62	6.79	5.96	5.13	4.31	3.48	2.67	2.67	2.67
	-7	9.10	8.22	7.34	6.46	5.57	4.69	3.81	2.52	2.52	2.52
	-2	10.28	9.42	8.57	7.71	6.86	6.00	5.15	4.29	3.44	2.58
	2	11.46	10.36	9.25	8.15	7.05	5.94	4.84	3.73	2.63	2.63
	7	13.24	11.88	10.52	9.16	7.80	6.44	5.08	3.72	2.36	1.01
	10	13.86	12.62	11.11	9.61	8.10	6.59	5.20	3.86	2.51	1.17
	12	14.28	12.77	11.27	9.76	8.26	6.75	5.38	4.02	2.65	1.28
	15	14.51	13.01	11.50	10.00	8.49	6.99	5.66	4.25	2.85	1.45
20	14.90	13.40	11.89	10.39	8.88	7.38	6.11	4.65	3.18	1.72	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.60	2.38	2.16	1.94	1.73	1.51	1.29	1.07	1.07	1.07
	-20	2.89	2.61	2.33	2.05	1.77	1.49	1.21	1.11	1.11	1.11
	-15	3.17	2.83	2.49	2.16	1.82	1.48	1.14	1.14	1.14	1.14
	-10	3.32	2.96	2.60	2.24	1.88	1.51	1.15	0.92	0.92	0.92
	-7	3.41	3.04	2.66	2.29	1.91	1.54	1.16	0.79	0.79	0.79
	-2	3.17	2.90	2.62	2.35	2.08	1.80	1.53	1.26	0.99	0.71
	2	3.24	2.92	2.59	2.27	1.95	1.62	1.30	0.97	0.65	0.65
	7	3.15	2.83	2.52	2.20	1.88	1.57	1.25	0.93	0.62	0.30
	10	3.12	2.71	2.31	1.92	1.52	1.13	0.92	0.71	0.50	0.29
	12	3.10	2.70	2.30	1.91	1.51	1.11	0.90	0.70	0.49	0.28
	15	3.09	2.69	2.29	1.89	1.49	1.08	0.88	0.68	0.47	0.27
20	3.08	2.67	2.26	1.86	1.45	1.04	0.84	0.65	0.45	0.25	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.00	1.98	1.95	1.92	1.87	1.82	1.75	1.64	1.64	1.64
	-20	2.18	2.17	2.17	2.16	2.16	2.15	2.13	2.12	2.12	2.12
	-15	2.32	2.34	2.36	2.39	2.42	2.48	2.56	2.56	2.56	2.56
	-10	2.55	2.58	2.62	2.67	2.74	2.84	3.02	2.90	2.90	2.90
	-7	2.67	2.71	2.76	2.82	2.92	3.06	3.28	3.19	3.19	3.19
	-2	3.24	3.25	3.27	3.28	3.30	3.33	3.36	3.41	3.49	3.62
	2	3.54	3.55	3.57	3.59	3.62	3.66	3.73	3.83	4.05	4.05
	7	4.20	4.19	4.18	4.17	4.14	4.11	4.07	3.99	3.84	3.36
	10	4.44	4.66	4.80	5.01	5.32	5.85	5.67	5.45	5.05	4.07
	12	4.61	4.73	4.89	5.12	5.47	6.08	5.96	5.78	5.43	4.57
	15	4.69	4.83	5.02	5.30	5.72	6.45	6.43	6.29	6.03	5.38
20	4.84	5.01	5.25	5.60	6.14	7.10	7.26	7.21	7.12	6.88	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =45°C**Outdoor unit HWT-1101H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	5.36	4.85	4.34	3.83	3.33	2.82	2.31	1.80	1.80	1.80
	-20	6.25	5.79	5.14	4.49	3.84	3.19	2.54	2.29	2.29	2.29
	-15	7.52	6.73	5.94	5.15	4.35	3.56	2.77	2.77	2.77	2.77
	-10	8.10	7.30	6.50	5.70	4.91	4.11	3.31	2.50	2.50	2.50
	-7	8.44	7.64	6.84	6.04	5.24	4.44	3.64	2.33	2.33	2.33
	-2	10.03	8.95	7.87	6.79	5.71	4.64	3.56	2.48	2.48	2.48
	2	10.66	9.52	8.38	7.24	6.10	4.96	4.31	2.60	2.60	2.60
	7	12.41	11.22	10.03	8.84	7.64	6.45	5.26	4.07	2.88	2.88
	10	12.92	11.90	10.51	9.13	7.75	6.37	5.41	4.46	3.10	3.10
	12	13.26	11.91	10.56	9.21	7.86	6.51	5.42	4.33	3.24	3.24
	15	13.23	11.93	10.63	9.33	8.03	6.73	5.43	4.14	3.46	3.46
	20	13.19	11.97	10.75	9.53	8.31	7.09	5.46	3.82	3.82	3.82

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	3.17	2.89	2.60	2.32	2.03	1.75	1.46	1.18	1.18	1.18
	-20	3.49	3.15	2.80	2.45	2.10	1.75	1.40	1.26	1.26	1.26
	-15	3.82	3.41	2.99	2.58	2.17	1.75	1.34	1.34	1.34	1.34
	-10	3.74	3.35	2.95	2.56	2.16	1.77	1.38	1.12	1.12	1.12
	-7	3.69	3.31	2.93	2.55	2.16	1.78	1.40	0.98	0.98	0.98
	-2	3.69	3.29	2.90	2.50	2.11	1.71	1.32	0.92	0.92	0.92
	2	3.59	3.16	2.73	2.31	1.88	1.45	1.37	0.88	0.88	0.88
	7	3.71	3.34	2.98	2.61	2.25	1.88	1.52	1.15	0.79	0.79
	10	3.61	3.13	2.70	2.27	1.83	1.40	1.22	1.04	0.77	0.77
	12	3.55	3.12	2.69	2.26	1.83	1.40	1.19	0.97	0.76	0.76
	15	3.53	3.10	2.68	2.25	1.82	1.40	1.14	0.88	0.75	0.75
	20	3.50	3.08	2.66	2.23	1.81	1.39	1.06	0.72	0.72	0.72

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.69	1.68	1.67	1.65	1.64	1.61	1.58	1.53	1.53	1.53
	-20	1.79	1.84	1.84	1.83	1.83	1.82	1.81	1.81	1.81	1.81
	-15	1.97	1.98	1.98	1.99	2.01	2.03	2.07	2.07	2.07	2.07
	-10	2.17	2.18	2.20	2.23	2.27	2.32	2.41	2.24	2.24	2.24
	-7	2.29	2.31	2.34	2.37	2.42	2.49	2.60	2.38	2.38	2.38
	-2	2.72	2.72	2.71	2.71	2.71	2.70	2.70	2.68	2.68	2.68
	2	2.97	3.01	3.07	3.14	3.25	3.42	3.15	2.95	2.95	2.95
	7	3.35	3.35	3.37	3.38	3.40	3.43	3.47	3.54	3.67	3.67
	10	3.58	3.80	3.90	4.03	4.22	4.54	4.44	4.30	4.02	4.02
	12	3.74	3.82	3.93	4.08	4.30	4.65	4.57	4.45	4.26	4.26
	15	3.75	3.84	3.97	4.15	4.40	4.82	4.78	4.71	4.64	4.64
	20	3.77	3.89	4.05	4.27	4.59	5.10	5.17	5.31	5.31	5.31

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =55°C

Outdoor unit HWT-1101H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	5.33	4.82	4.31	3.80	3.29	2.78	2.27	1.76	1.76	1.76
	-20	6.07	5.47	4.88	4.28	3.68	3.09	2.49	2.24	2.24	2.24
	-15	6.81	6.13	5.44	4.76	4.08	3.39	2.71	2.71	2.71	2.71
	-10	7.15	6.41	5.68	4.94	4.20	3.47	2.82	2.35	2.35	2.35
	-7	7.72	6.88	6.04	5.19	4.35	3.51	2.88	2.14	2.14	2.14
	-2	9.23	8.26	7.30	6.33	5.37	4.40	3.44	2.47	2.47	2.47
	2	9.98	8.91	7.85	6.78	5.72	4.65	3.71	2.74	2.74	2.74
	7	10.17	9.13	8.09	7.05	6.00	4.96	3.92	2.88	2.88	2.88
	10	10.84	9.66	8.48	7.31	6.13	5.07	4.02	2.96	2.96	2.96
	12	11.29	10.02	8.75	7.48	6.21	5.15	4.08	3.02	3.02	3.02
	15	11.36	10.13	8.91	7.68	6.46	5.39	4.31	3.24	3.24	3.24
20	11.47	10.32	9.17	8.02	6.87	5.78	4.70	3.61	3.61	3.61	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	3.69	3.36	3.03	2.70	2.37	2.04	1.71	1.38	1.38	1.38
	-20	3.68	3.34	3.00	2.67	2.33	1.99	1.65	1.49	1.49	1.49
	-15	3.67	3.32	2.98	2.63	2.28	1.94	1.59	1.59	1.59	1.59
	-10	3.63	3.26	2.88	2.51	2.14	1.77	1.54	1.33	1.33	1.33
	-7	3.78	3.36	2.93	2.51	2.09	1.67	1.52	1.17	1.17	1.17
	-2	3.83	3.46	3.08	2.71	2.33	1.96	1.58	1.20	1.20	1.20
	2	3.74	3.34	2.94	2.53	2.13	1.73	1.56	1.23	1.23	1.23
	7	3.62	3.26	2.91	2.55	2.19	1.84	1.48	1.13	1.13	1.13
	10	3.53	3.13	2.72	2.32	1.92	1.63	1.35	1.06	1.06	1.06
	12	3.47	3.04	2.60	2.17	1.73	1.49	1.26	1.02	1.02	1.02
	15	3.46	3.03	2.60	2.17	1.73	1.49	1.25	1.01	1.01	1.01
20	3.44	3.02	2.59	2.17	1.74	1.49	1.24	0.99	0.99	0.99	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.44	1.43	1.42	1.41	1.39	1.36	1.33	1.28	1.28	1.28
	-20	1.65	1.64	1.62	1.61	1.58	1.55	1.51	1.51	1.51	1.51
	-15	1.86	1.84	1.83	1.81	1.79	1.75	1.70	1.70	1.70	1.70
	-10	1.97	1.97	1.97	1.97	1.96	1.96	1.83	1.77	1.77	1.77
	-7	2.04	2.05	2.06	2.07	2.08	2.10	1.90	1.83	1.83	1.83
	-2	2.41	2.39	2.37	2.34	2.30	2.25	2.17	2.06	2.06	2.06
	2	2.67	2.67	2.67	2.68	2.68	2.69	2.37	2.23	2.23	2.23
	7	2.81	2.80	2.78	2.76	2.74	2.70	2.65	2.56	2.56	2.56
	10	3.07	3.09	3.12	3.15	3.20	3.11	2.98	2.79	2.79	2.79
	12	3.25	3.30	3.37	3.45	3.59	3.45	3.25	2.96	2.96	2.96
	15	3.28	3.35	3.43	3.55	3.72	3.61	3.45	3.21	3.21	3.21
20	3.33	3.42	3.54	3.70	3.95	3.88	3.79	3.65	3.65	3.65	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-1101H(R)W-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	2.92	2.88	2.93
	-20	3.54	3.47	3.51
	-15	4.15	4.05	4.09
	-10	4.94	4.76	4.75
	-7	5.42	5.19	5.15
	-2	6.31	6.05	6.04
	2	7.03	6.73	6.76
	7	8.28	7.97	7.79
	10	8.70	8.40	8.22
	12	8.98	8.69	8.51
	15	9.40	9.13	8.93
	20	10.10	9.85	9.65

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	1.54	1.80	2.18
	-20	1.62	1.88	2.28
	-15	1.70	1.95	2.38
	-10	1.77	2.06	2.48
	-7	1.80	2.11	2.54
	-2	1.75	2.10	2.52
	2	1.71	2.09	2.51
	7	1.65	2.07	2.51
	10	1.65	2.07	2.52
	12	1.64	2.07	2.53
	15	1.64	2.08	2.54
	20	1.63	2.08	2.56

COP		LWT (°C)		
		35	45	55
TO (°C)	-25	1.90	1.60	1.34
	-20	2.18	1.85	1.54
	-15	2.44	2.08	1.72
	-10	2.80	2.32	1.91
	-7	3.01	2.46	2.03
	-2	3.61	2.88	2.40
	2	4.11	3.22	2.69
	7	5.02	3.85	3.10
	10	5.29	4.06	3.26
	12	5.47	4.19	3.36
	15	5.74	4.40	3.52
	20	6.20	4.74	3.77

* Power input does not include water pump power.

* Heating capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C

Outdoor unit HWT-1101H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	8.12	7.28	6.44	5.59	4.75	3.91	3.07	2.22	1.38	1.38
	27	7.91	7.11	6.30	5.50	4.69	3.89	3.08	2.27	1.47	1.47
	30	7.83	7.04	6.25	5.46	4.67	3.88	3.09	2.30	1.51	1.51
	35	8.00	7.20	6.39	5.59	4.79	3.98	3.18	2.37	1.57	1.57
	40	5.97	5.38	4.79	4.19	3.60	3.01	2.41	2.13	1.84	1.84
	43	4.95	4.46	3.97	3.48	2.98	2.49	2.00	2.00	2.00	2.00

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.85	1.65	1.45	1.25	1.05	0.84	0.64	0.44	0.24	0.24
	27	2.25	2.02	1.79	1.56	1.33	1.10	0.87	0.64	0.41	0.41
	30	2.42	2.18	1.94	1.69	1.45	1.21	0.97	0.72	0.48	0.48
	35	2.86	2.54	2.27	1.99	1.72	1.43	1.16	0.88	0.60	0.60
	40	2.69	2.40	2.12	1.84	1.56	1.28	1.00	0.91	0.81	0.81
	43	2.67	2.38	2.09	1.80	1.51	1.22	0.93	0.93	0.93	0.93

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.39	4.41	4.45	4.49	4.55	4.63	4.77	5.04	5.75	5.75
	27	3.52	3.52	3.52	3.52	3.53	3.54	3.55	3.56	3.60	3.60
	30	3.23	3.23	3.22	3.22	3.21	3.21	3.20	3.18	3.14	3.14
	35	2.80	2.83	2.82	2.81	2.79	2.78	2.75	2.70	2.62	2.62
	40	2.22	2.24	2.25	2.27	2.30	2.34	2.40	2.35	2.28	2.28
	43	1.85	1.87	1.90	1.93	1.98	2.04	2.15	2.15	2.15	2.15

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C**Outdoor unit HWT-1101H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	9.47	8.54	7.61	6.68	5.75	4.82	3.89	2.96	2.03	1.1
	27	9.37	8.46	7.55	6.64	5.74	4.83	3.92	3.01	2.10	1.61
	30	9.32	8.43	7.53	6.63	5.73	4.83	3.93	3.04	2.14	1.83
	35	9.25	8.37	7.49	6.60	5.72	4.84	3.96	3.07	2.19	2.19
	40	7.49	6.74	6.00	5.25	4.51	3.77	3.02	2.69	2.36	2.36
	43	6.43	5.77	5.11	4.45	3.78	3.12	2.46	2.46	2.46	2.46

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.83	1.64	1.46	1.27	1.09	0.90	0.72	0.53	0.35	0.16
	27	2.37	2.13	1.89	1.65	1.41	1.17	0.93	0.69	0.45	0.35
	30	2.60	2.33	2.07	1.81	1.54	1.28	1.02	0.75	0.49	0.43
	35	2.98	2.68	2.38	2.07	1.77	1.47	1.17	0.86	0.56	0.56
	40	2.77	2.48	2.18	1.89	1.60	1.30	1.01	0.89	0.78	0.78
	43	2.65	2.36	2.07	1.78	1.49	1.20	0.91	0.91	0.91	0.91

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.17	5.19	5.22	5.25	5.29	5.34	5.43	5.57	5.87	6.88
	27	3.96	3.98	4.00	4.04	4.08	4.14	4.23	4.39	4.72	4.64
	30	3.59	3.61	3.64	3.67	3.71	3.78	3.87	4.04	4.37	4.28
	35	3.10	3.13	3.15	3.19	3.23	3.30	3.39	3.56	3.91	3.91
	40	2.70	2.72	2.75	2.78	2.83	2.90	3.00	3.01	3.03	3.03
	43	2.43	2.44	2.47	2.50	2.54	2.60	2.70	2.70	2.70	2.70

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C**Outdoor unit HWT-1101H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	10.57	9.44	8.31	7.18	6.05	4.92	3.79	2.66	1.53	1.53
	27	10.43	9.32	8.21	7.10	5.99	4.88	3.77	2.66	2.06	2.06
	30	10.36	9.26	8.16	7.06	5.97	4.87	3.77	2.67	2.29	2.29
	35	10.26	9.18	8.09	7.01	5.92	4.84	3.75	2.67	2.67	2.67
	40	8.57	7.69	6.80	5.92	5.03	4.15	3.26	2.86	2.86	2.86
	43	7.56	6.80	6.03	5.27	4.50	3.74	2.97	2.97	2.97	2.97

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.80	1.59	1.38	1.17	0.96	0.75	0.54	0.33	0.12	0.12
	27	2.39	2.11	1.83	1.54	1.26	0.98	0.70	0.42	0.31	0.31
	30	2.64	2.33	2.02	1.70	1.39	1.08	0.77	0.46	0.39	0.39
	35	3.06	2.45	2.04	1.67	1.33	1.04	0.77	0.52	0.52	0.52
	40	2.83	2.50	2.18	1.85	1.53	1.21	0.88	0.75	0.75	0.75
	43	2.69	2.39	2.09	1.79	1.48	1.18	0.88	0.88	0.88	0.88

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.87	5.94	6.02	6.14	6.30	6.56	7.02	8.06	12.75	12.75
	27	4.37	4.42	4.50	4.60	4.74	4.97	5.39	6.36	6.72	6.72
	30	3.93	3.98	4.05	4.15	4.28	4.50	4.90	5.84	5.92	5.92
	35	3.35	3.74	3.97	4.20	4.45	4.67	4.90	5.13	5.13	5.13
	40	3.03	3.07	3.12	3.19	3.29	3.44	3.70	3.84	3.84	3.84
	43	2.81	2.85	2.89	2.95	3.03	3.16	3.38	3.38	3.38	3.38

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-1101H(R)W-E

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	5.70	6.47	7.12
	27	5.20	6.03	6.72
	30	4.98	5.83	6.55
	35	4.62	5.51	6.26
	40	3.99	4.90	5.67

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	0.91	0.89	0.87
	27	1.12	1.11	1.10
	30	1.22	1.21	1.20
	35	1.37	1.36	1.36
	40	1.53	1.54	1.55

COP		LWT (°C)		
		7	13	18
TO (°C)	20	6.26	7.29	8.18
	27	4.62	5.43	6.12
	30	4.09	4.84	5.47
	35	3.37	4.04	4.60
	40	2.60	3.18	3.65

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =35°C**Outdoor unit HWT-1401H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	7.67	6.91	6.15	5.40	4.64	3.88	3.88	3.88	3.88	3.88
	-20	8.88	8.03	7.18	6.33	5.48	4.63	4.63	4.63	4.63	4.63
	-15	10.08	9.14	8.20	7.26	6.32	5.38	5.38	5.38	5.38	5.38
	-10	11.94	10.77	9.60	8.43	7.26	5.94	4.97	4.97	4.97	4.97
	-7	13.05	11.75	10.44	9.14	7.83	6.28	4.72	4.72	4.72	4.72
	-2	14.89	13.49	12.08	10.68	9.28	7.87	6.47	5.06	5.06	5.06
	2	16.13	14.22	12.32	10.41	9.14	7.88	6.61	5.34	5.34	5.34
	7	18.39	16.25	14.11	11.97	10.38	8.79	7.21	5.62	4.03	2.44
	10	19.57	17.27	14.98	12.69	10.83	8.97	7.11	5.25	3.39	2.75
	12	20.35	17.96	15.56	13.17	11.13	9.09	7.04	5.00	2.96	2.96
	15	19.71	17.57	15.43	13.29	11.26	9.23	7.20	5.17	3.14	3.14
20	18.63	16.92	15.21	13.50	11.49	9.47	7.46	5.44	3.43	3.43	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	3.70	3.36	3.02	2.69	2.35	2.01	2.01	2.01	2.01	2.01
	-20	3.88	3.53	3.18	2.83	2.48	2.13	2.13	2.13	2.13	2.13
	-15	4.05	3.69	3.33	2.96	2.60	2.24	2.24	2.24	2.24	2.24
	-10	4.35	3.92	3.49	3.06	2.63	2.17	1.86	1.86	1.86	1.86
	-7	4.53	4.06	3.59	3.11	2.64	2.14	1.63	1.63	1.63	1.63
	-2	4.69	4.22	3.76	3.29	2.83	2.36	1.90	1.43	1.43	1.43
	2	4.62	3.93	3.23	2.54	2.22	1.91	1.59	1.27	1.27	1.27
	7	4.73	3.98	3.24	2.49	2.18	1.86	1.55	1.24	0.92	0.61
	10	4.71	3.96	3.20	2.45	2.11	1.76	1.42	1.07	0.73	0.60
	12	4.69	3.94	3.18	2.43	2.06	1.70	1.33	0.97	0.60	0.60
	15	4.50	3.81	3.12	2.43	2.06	1.69	1.31	0.94	0.57	0.57
20	4.18	3.59	3.01	2.42	2.04	1.66	1.29	0.91	0.53	0.53	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.07	2.06	2.04	2.01	1.98	1.93	1.93	1.93	1.93	1.93
	-20	2.29	2.28	2.26	2.24	2.21	2.18	2.18	2.18	2.18	2.18
	-15	2.49	2.48	2.47	2.45	2.43	2.40	2.40	2.40	2.40	2.40
	-10	2.74	2.75	2.75	2.76	2.77	2.73	2.67	2.67	2.67	2.67
	-7	2.88	2.89	2.91	2.93	2.97	2.94	2.90	2.90	2.90	2.90
	-2	3.17	3.19	3.21	3.24	3.28	3.33	3.41	3.54	3.54	3.54
	2	3.49	3.62	3.81	4.10	4.11	4.13	4.16	4.20	4.20	4.20
	7	3.89	4.08	4.36	4.81	4.77	4.72	4.65	4.54	4.36	4.00
	10	4.16	4.37	4.68	5.17	5.13	5.08	5.01	4.89	4.64	4.56
	12	4.34	4.56	4.89	5.42	5.39	5.35	5.29	5.18	4.93	4.93
	15	4.38	4.61	4.95	5.48	5.48	5.48	5.48	5.47	5.47	5.47
20	4.46	4.71	5.06	5.58	5.62	5.69	5.80	6.00	6.47	6.47	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =45°C**Outdoor unit HWT-1401H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	7.65	6.87	6.09	5.30	4.52	3.74	3.74	3.74	3.74	3.74
	-20	8.81	7.94	7.07	6.20	5.33	4.46	4.46	4.46	4.46	4.46
	-15	9.96	9.00	8.04	7.09	6.13	5.17	5.17	5.17	5.17	5.17
	-10	11.20	10.15	9.09	8.04	6.99	5.67	4.70	4.70	4.70	4.70
	-7	11.94	10.83	9.73	8.62	7.51	5.97	4.42	4.42	4.42	4.42
	-2	13.45	11.98	10.50	9.03	7.56	6.08	4.61	4.61	4.61	4.61
	2	14.77	13.21	11.64	10.08	8.67	7.26	5.85	5.85	5.85	5.85
	7	16.30	14.70	13.10	11.50	9.67	7.85	6.02	6.02	6.02	6.02
	10	17.39	15.68	13.98	12.27	10.38	8.48	6.58	6.58	6.58	6.58
	12	18.11	16.34	14.56	12.79	10.85	8.90	6.96	6.96	6.96	6.96
	15	17.44	15.77	14.10	12.28	10.35	8.42	7.20	7.20	7.20	7.20
20	16.31	14.82	13.33	11.42	9.52	7.61	7.61	7.61	7.61	7.61	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.19	3.82	3.44	3.07	2.69	2.32	2.32	2.32	2.32	2.32
	-20	4.38	3.99	3.59	3.20	2.80	2.41	2.41	2.41	2.41	2.41
	-15	4.57	4.16	3.74	3.33	2.91	2.50	2.50	2.50	2.50	2.50
	-10	4.73	4.28	3.83	3.39	2.94	2.46	2.13	2.13	2.13	2.13
	-7	4.83	4.36	3.89	3.42	2.95	2.43	1.91	1.91	1.91	1.91
	-2	4.83	4.32	3.82	3.31	2.81	2.30	1.80	1.80	1.80	1.80
	2	4.69	4.14	3.58	3.03	2.61	2.18	1.76	1.76	1.76	1.76
	7	4.70	4.16	3.62	3.08	2.57	2.06	1.55	1.55	1.55	1.55
	10	4.73	4.17	3.61	3.04	2.54	2.04	1.54	1.54	1.54	1.54
	12	4.75	4.17	3.60	3.02	2.52	2.03	1.53	1.53	1.53	1.53
	15	4.54	3.96	3.38	2.83	2.33	1.83	1.52	1.52	1.52	1.52
20	4.18	3.60	3.02	2.51	2.01	1.50	1.50	1.50	1.50	1.50	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.83	1.80	1.77	1.73	1.68	1.61	1.61	1.61	1.61	1.61
	-20	2.01	1.99	1.97	1.94	1.90	1.85	1.85	1.85	1.85	1.85
	-15	2.18	2.17	2.15	2.13	2.10	2.07	2.07	2.07	2.07	2.07
	-10	2.37	2.37	2.37	2.38	2.38	2.31	2.21	2.21	2.21	2.21
	-7	2.47	2.48	2.50	2.52	2.55	2.45	2.31	2.31	2.31	2.31
	-2	2.78	2.77	2.75	2.73	2.69	2.64	2.57	2.57	2.57	2.57
	2	3.15	3.19	3.25	3.33	3.33	3.33	3.32	3.32	3.32	3.32
	7	3.47	3.53	3.62	3.73	3.76	3.81	3.88	3.88	3.88	3.88
	10	3.68	3.76	3.88	4.03	4.08	4.16	4.28	4.28	4.28	4.28
	12	3.81	3.91	4.05	4.24	4.30	4.39	4.55	4.55	4.55	4.55
	15	3.84	3.98	4.17	4.34	4.44	4.60	4.74	4.74	4.74	4.74
20	3.90	4.12	4.41	4.55	4.74	5.07	5.07	5.07	5.07	5.07	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =55°C

Outdoor unit HWT-1401H(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	7.61	6.89	6.16	6.16	6.16	6.16	6.16	6.16	6.16	6.16
	-20	8.28	7.45	6.63	6.16	5.70	5.70	5.70	5.70	5.70	5.70
	-15	8.94	8.02	7.09	6.17	5.24	5.24	5.24	5.24	5.24	5.24
	-10	9.92	8.91	7.91	6.91	5.92	5.27	4.62	4.62	4.62	4.62
	-7	10.50	9.45	8.41	7.36	6.33	5.29	4.25	4.25	4.25	4.25
	-2	11.87	10.71	9.56	8.40	7.25	6.09	4.93	4.93	4.93	4.93
	2	12.93	11.83	10.72	9.62	8.24	6.86	5.48	5.48	5.48	5.48
	7	14.31	12.81	11.30	9.89	8.49	7.08	5.67	5.67	5.67	5.67
	10	15.22	13.65	12.08	10.61	9.14	7.67	6.20	6.20	6.20	6.20
	12	15.83	14.22	12.60	11.09	9.58	8.07	6.56	6.56	6.56	6.56
	15	15.31	13.85	12.28	10.78	9.27	7.77	6.83	6.83	6.83	6.83
20	14.45	13.25	11.76	10.26	8.77	7.27	7.27	7.27	7.27	7.27	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.81	4.43	4.05	4.05	4.05	4.05	4.05	4.05	4.05	4.05
	-20	4.82	4.40	3.98	3.75	3.53	3.53	3.53	3.53	3.53	3.53
	-15	4.82	4.37	3.91	3.46	3.00	3.00	3.00	3.00	3.00	3.00
	-10	4.82	4.37	3.92	3.46	3.05	2.80	2.55	2.55	2.55	2.55
	-7	4.82	4.37	3.92	3.47	3.07	2.68	2.28	2.28	2.28	2.28
	-2	4.80	4.37	3.94	3.51	3.08	2.65	2.22	2.22	2.22	2.22
	2	4.68	4.30	3.91	3.53	3.08	2.62	2.17	2.17	2.17	2.17
	7	4.68	4.15	3.62	3.19	2.77	2.34	1.91	1.91	1.91	1.91
	10	4.68	4.14	3.61	3.19	2.76	2.34	1.92	1.92	1.92	1.92
	12	4.68	4.14	3.60	3.18	2.76	2.34	1.92	1.92	1.92	1.92
	15	4.46	3.94	3.44	3.02	2.60	2.18	1.92	1.92	1.92	1.92
20	4.08	3.61	3.19	2.76	2.34	1.91	1.91	1.91	1.91	1.91	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.58	1.55	1.52	1.52	1.52	1.52	1.52	1.52	1.52	1.52
	-20	1.72	1.69	1.66	1.64	1.62	1.62	1.62	1.62	1.62	1.62
	-15	1.85	1.84	1.81	1.78	1.75	1.75	1.75	1.75	1.75	1.75
	-10	2.06	2.04	2.02	2.00	1.94	1.88	1.81	1.81	1.81	1.81
	-7	2.18	2.16	2.14	2.12	2.06	1.98	1.86	1.86	1.86	1.86
	-2	2.47	2.45	2.43	2.39	2.35	2.30	2.22	2.22	2.22	2.22
	2	2.76	2.75	2.74	2.73	2.68	2.61	2.53	2.53	2.53	2.53
	7	3.06	3.09	3.12	3.10	3.07	3.03	2.97	2.97	2.97	2.97
	10	3.25	3.29	3.35	3.33	3.31	3.28	3.24	3.24	3.24	3.24
	12	3.38	3.43	3.50	3.49	3.47	3.45	3.42	3.42	3.42	3.42
	15	3.44	3.51	3.57	3.57	3.57	3.57	3.56	3.56	3.56	3.56
20	3.54	3.67	3.69	3.72	3.75	3.81	3.81	3.81	3.81	3.81	

- * Heating capacity and power input are maximum (peak) value during operation.
- * Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.
- * Power input does not include water pump power.
- * Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)
 LWT : Leaving water temperature (°C)



Specifications Low noise operation

Outdoor unit HWT-1401H(R)W-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	4.27	4.22	—
	-20	4.99	4.88	4.88
	-15	5.71	5.53	5.63
	-10	6.68	6.50	6.38
	-7	7.26	7.08	6.83
	-2	8.57	8.37	8.27
	2	9.61	9.40	9.42
	7	11.12	10.68	10.56
	10	12.02	11.63	11.51
	12	12.62	12.26	12.15
	15	12.85	12.53	12.45
20	13.22	12.97	12.95	

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	2.14	2.52	—
	-20	2.25	2.58	3.08
	-15	2.35	2.64	3.16
	-10	2.44	2.73	3.24
	-7	2.49	2.79	3.29
	-2	2.46	2.84	3.37
	2	2.44	2.88	3.44
	7	2.45	3.05	3.44
	10	2.43	3.03	3.53
	12	2.42	3.02	3.59
	15	2.42	3.02	3.59
20	2.42	3.01	3.60	

COP		LWT (°C)		
		35	45	55
TO (°C)	-25	2.00	1.67	—
	-20	2.22	1.89	1.59
	-15	2.43	2.09	1.78
	-10	2.74	2.38	1.97
	-7	2.92	2.54	2.08
	-2	3.48	2.95	2.45
	2	3.94	3.26	2.74
	7	4.54	3.50	3.07
	10	4.94	3.84	3.26
	12	5.21	4.06	3.38
	15	5.31	4.15	3.46
20	5.46	4.31	3.60	

* Power input does not include water pump power.

* Heating capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C**Outdoor unit HWT-1401H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	11.60	10.49	9.39	8.28	7.18	6.07	4.96	3.86	2.75	2.75
	27	11.11	10.04	8.97	7.91	6.84	5.78	4.71	3.65	3.06	3.06
	30	10.89	9.85	8.80	7.75	6.70	5.65	4.61	3.56	3.19	3.19
	35	10.54	9.52	8.50	7.48	6.47	5.45	4.43	3.41	3.41	3.41
	40	7.09	6.57	6.06	5.54	5.03	4.51	4.00	3.49	3.49	3.49
	43	6.62	6.00	5.38	4.77	4.15	3.53	3.53	3.53	3.53	3.53

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	2.99	2.70	2.42	2.13	1.85	1.56	1.27	0.99	0.70	0.70
	27	3.65	3.28	2.91	2.54	2.17	1.80	1.42	1.05	0.90	0.90
	30	3.94	3.53	3.12	2.71	2.31	1.90	1.49	1.08	0.99	0.99
	35	4.41	3.94	3.47	3.00	2.54	2.07	1.60	1.13	1.13	1.13
	40	3.65	3.36	3.07	2.77	2.48	2.19	1.90	1.61	1.61	1.61
	43	3.65	3.30	2.95	2.59	2.24	1.89	1.89	1.89	1.89	1.89

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	3.88	3.88	3.88	3.89	3.89	3.89	3.90	3.91	3.93	3.93
	27	3.04	3.06	3.08	3.12	3.16	3.22	3.31	3.46	3.40	3.40
	30	2.77	2.79	2.82	2.86	2.91	2.98	3.09	3.29	3.23	3.23
	35	2.39	2.42	2.45	2.49	2.55	2.64	2.77	3.02	3.02	3.02
	40	1.94	1.96	1.98	2.00	2.03	2.06	2.11	2.17	2.17	2.17
	43	1.81	1.82	1.83	1.84	1.85	1.87	1.87	1.87	1.87	1.87

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C**Outdoor unit HWT-1401H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	13.44	12.14	10.84	9.55	8.25	6.95	5.65	4.36	3.06	1.76
	27	13.04	11.78	10.52	9.26	8.00	6.74	5.48	4.22	3.53	2.84
	30	12.87	11.63	10.39	9.14	7.90	6.65	5.41	4.17	3.73	3.30
	35	12.59	11.37	10.16	8.94	7.72	6.50	5.29	4.07	4.07	4.07
	40	9.02	8.41	7.80	7.20	6.59	5.98	5.37	4.76	4.76	4.76
	43	8.54	7.70	6.86	6.01	5.17	5.17	5.17	5.17	5.17	5.17

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	3.01	2.72	2.42	2.13	1.83	1.54	1.24	0.95	0.65	0.36
	27	3.78	3.39	2.99	2.60	2.20	1.80	1.41	1.01	0.85	0.70
	30	4.12	3.68	3.24	2.80	2.36	1.92	1.48	1.04	0.94	0.84
	35	4.67	4.16	3.64	3.13	2.62	2.11	1.59	1.08	1.08	1.08
	40	3.64	3.35	3.06	2.77	2.48	2.19	1.90	1.61	1.61	1.61
	43	3.64	3.21	2.78	2.35	1.92	1.92	1.92	1.92	1.92	1.92

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.47	4.47	4.48	4.49	4.50	4.52	4.55	4.59	4.67	4.89
	27	3.45	3.48	3.52	3.57	3.64	3.74	3.90	4.18	4.14	4.08
	30	3.13	3.16	3.21	3.27	3.35	3.47	3.66	4.02	3.98	3.93
	35	2.70	2.74	2.79	2.85	2.95	3.09	3.32	3.77	3.77	3.77
	40	2.48	2.51	2.55	2.60	2.66	2.73	2.83	2.96	2.96	2.96
	43	2.35	2.40	2.47	2.56	2.69	2.69	2.69	2.69	2.69	2.69

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C**Outdoor unit HWT-1401H(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	14.76	13.36	11.95	10.55	9.15	7.74	6.34	4.94	3.53	2.13
	27	14.24	12.86	11.48	10.10	8.71	7.33	5.95	4.57	3.19	2.44
	30	14.01	12.64	11.27	9.90	8.53	7.16	5.79	4.42	3.04	2.58
	35	13.64	12.29	10.93	9.58	8.22	6.87	5.51	4.16	2.80	2.80
	40	10.47	9.75	9.03	8.31	7.59	6.87	6.15	5.43	4.71	4.71
	43	9.74	8.77	7.80	6.83	5.86	5.86	5.86	5.86	5.86	5.86

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	3.11	2.80	2.50	2.19	1.89	1.58	1.28	0.97	0.67	0.36
	27	3.84	3.44	3.04	2.64	2.24	1.84	1.44	1.04	0.63	0.47
	30	4.16	3.71	3.27	2.83	2.39	1.95	1.51	1.06	0.62	0.52
	35	4.68	4.17	3.66	3.15	2.64	2.13	1.62	1.11	0.60	0.60
	40	3.65	3.37	3.09	2.81	2.53	2.26	1.98	1.70	1.42	1.42
	43	3.65	3.22	2.78	2.35	1.91	1.91	1.91	1.91	1.91	1.91

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.75	4.76	4.78	4.81	4.85	4.89	4.97	5.08	5.31	5.92
	27	3.71	3.74	3.77	3.82	3.89	3.99	4.14	4.41	5.03	5.18
	30	3.37	3.40	3.44	3.50	3.57	3.68	3.84	4.15	4.90	4.96
	35	2.91	2.95	2.99	3.04	3.11	3.22	3.40	3.74	4.67	4.67
	40	2.87	2.89	2.92	2.95	2.99	3.05	3.11	3.20	3.32	3.32
	43	2.67	2.73	2.81	2.91	3.07	3.07	3.07	3.07	3.07	3.07

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation**Outdoor unit HWT-1401H(R)W-E**

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	9.04	10.36	11.46
	27	8.26	9.54	10.60
	30	7.92	9.18	10.23
	35	7.36	8.59	9.62
	40	5.85	7.36	8.61

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	1.83	1.86	1.88
	27	2.18	2.23	2.27
	30	2.32	2.39	2.44
	35	2.57	2.65	2.72
	40	2.78	2.90	3.00

COP		LWT (°C)		
		7	13	18
TO (°C)	20	4.94	5.58	6.10
	27	3.80	4.28	4.67
	30	3.41	3.85	4.19
	35	2.86	3.24	3.54
	40	2.11	2.54	2.87

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =35°C**Outdoor unit HWT-801H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.76	4.28	3.81	3.33	3.25	3.25	3.25	3.25	3.25	3.25
	-20	5.64	5.08	4.51	3.95	3.85	3.85	3.85	3.85	3.85	3.85
	-15	6.52	5.87	5.22	4.56	4.45	4.45	4.45	4.45	4.45	4.45
	-10	7.59	6.83	6.07	5.31	5.17	5.17	5.17	5.17	5.17	5.17
	-7	8.23	7.41	6.58	5.76	4.94	4.21	4.21	4.21	4.21	4.21
	-2	9.58	8.62	7.66	6.71	5.75	4.90	4.90	4.90	4.90	4.90
	2	10.66	9.59	8.53	7.46	6.40	5.33	5.33	5.33	5.33	5.33
	7	12.27	11.04	9.82	8.59	7.36	6.14	4.91	3.68	2.65	2.65
	10	12.86	11.57	10.29	9.00	7.72	6.43	5.14	3.86	2.78	2.78
	12	13.25	11.93	10.60	9.28	7.95	6.63	5.30	3.98	2.86	2.86
	15	13.84	12.46	11.07	9.69	8.30	6.92	5.54	4.15	2.99	2.99
20	13.63	12.27	10.90	9.54	8.18	6.82	5.45	4.09	2.94	2.94	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.26	2.07	1.87	1.68	1.64	1.64	1.64	1.64	1.64	1.64
	-20	2.35	2.20	1.99	1.79	1.76	1.76	1.76	1.76	1.76	1.76
	-15	2.44	2.24	2.02	1.83	1.79	1.79	1.79	1.79	1.79	1.79
	-10	2.53	2.31	2.06	1.83	1.79	1.79	1.79	1.79	1.79	1.79
	-7	2.58	2.33	2.07	1.83	1.60	1.41	1.41	1.41	1.41	1.41
	-2	2.70	2.39	2.10	1.84	1.59	1.38	1.38	1.38	1.38	1.38
	2	2.80	2.38	2.08	1.81	1.55	1.30	1.30	1.30	1.30	1.30
	7	2.68	2.32	2.01	1.72	1.46	1.21	1.00	0.80	0.65	0.65
	10	2.66	2.25	1.94	1.66	1.39	1.16	0.94	0.76	0.62	0.62
	12	2.65	2.19	1.88	1.60	1.35	1.11	0.91	0.72	0.59	0.59
	15	2.63	2.33	1.99	1.68	1.40	1.14	0.91	0.70	0.55	0.55
20	2.78	2.30	1.96	1.64	1.35	1.08	0.84	0.63	0.46	0.46	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.11	2.07	2.04	1.99	1.98	1.98	1.98	1.98	1.98	1.98
	-20	2.40	2.31	2.27	2.20	2.19	2.19	2.19	2.19	2.19	2.19
	-15	2.67	2.62	2.58	2.50	2.48	2.48	2.48	2.48	2.48	2.48
	-10	3.00	2.96	2.94	2.90	2.88	2.88	2.88	2.88	2.88	2.88
	-7	3.19	3.18	3.18	3.15	3.08	2.98	2.98	2.98	2.98	2.98
	-2	3.55	3.61	3.64	3.65	3.62	3.55	3.55	3.55	3.55	3.55
	2	3.81	4.03	4.09	4.13	4.13	4.08	4.08	4.08	4.08	4.08
	7	4.58	4.75	4.88	4.98	5.05	5.05	4.93	4.60	4.05	4.05
	10	4.83	5.14	5.30	5.44	5.53	5.56	5.45	5.11	4.51	4.51
	12	5.00	5.45	5.63	5.79	5.91	5.95	5.85	5.50	4.87	4.87
	15	5.26	5.35	5.56	5.76	5.94	6.07	6.09	5.90	5.41	5.41
20	4.90	5.34	5.58	5.82	6.07	6.30	6.48	6.54	6.35	6.35	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =45°C**Outdoor unit HWT-801H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.73	4.26	3.78	3.31	3.23	3.23	3.23	3.23	3.23	3.23
	-20	5.56	5.01	4.45	3.89	3.79	3.79	3.79	3.79	3.79	3.79
	-15	6.40	5.76	5.12	4.48	4.36	4.36	4.36	4.36	4.36	4.36
	-10	7.47	6.72	5.98	5.23	5.09	5.09	5.09	5.09	5.09	5.09
	-7	8.12	7.30	6.49	5.68	4.87	4.15	4.15	4.15	4.15	4.15
	-2	9.45	8.50	7.56	6.61	5.67	4.83	4.83	4.83	4.83	4.83
	2	10.51	9.46	8.41	7.36	6.31	5.37	5.37	5.37	5.37	5.37
	7	12.02	10.82	9.62	8.41	7.21	6.01	6.01	6.01	6.01	6.01
	10	12.58	11.33	10.07	8.81	7.55	6.29	6.29	6.29	6.29	6.29
	12	12.96	11.66	10.37	9.07	7.78	6.48	6.48	6.48	6.48	6.48
	15	13.53	12.17	10.82	9.47	8.12	6.76	6.76	6.76	6.76	6.76
20	13.54	12.18	10.83	9.47	8.12	6.77	6.77	6.77	6.77	6.77	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.61	2.47	2.22	1.97	1.93	1.93	1.93	1.93	1.93	1.93
	-20	2.73	2.59	2.34	2.09	2.05	2.05	2.05	2.05	2.05	2.05
	-15	2.84	2.62	2.36	2.12	2.07	2.07	2.07	2.07	2.07	2.07
	-10	2.99	2.73	2.46	2.21	2.17	2.17	2.17	2.17	2.17	2.17
	-7	3.08	2.76	2.48	2.23	1.99	1.80	1.80	1.80	1.80	1.80
	-2	3.18	2.86	2.54	2.23	1.94	1.70	1.70	1.70	1.70	1.70
	2	3.26	2.88	2.55	2.23	1.91	1.64	1.64	1.64	1.64	1.64
	7	3.24	2.90	2.54	2.21	1.89	1.58	1.58	1.58	1.58	1.58
	10	3.23	2.84	2.47	2.13	1.79	1.48	1.48	1.48	1.48	1.48
	12	3.22	2.79	2.42	2.07	1.73	1.40	1.40	1.40	1.40	1.40
	15	3.21	2.88	2.49	2.12	1.76	1.42	1.42	1.42	1.42	1.42
20	3.31	2.80	2.40	2.02	1.67	1.34	1.34	1.34	1.34	1.34	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.81	1.72	1.70	1.68	1.67	1.67	1.67	1.67	1.67	1.67
	-20	2.04	1.93	1.90	1.86	1.85	1.85	1.85	1.85	1.85	1.85
	-15	2.25	2.20	2.17	2.12	2.10	2.10	2.10	2.10	2.10	2.10
	-10	2.50	2.46	2.43	2.37	2.35	2.35	2.35	2.35	2.35	2.35
	-7	2.64	2.64	2.61	2.55	2.45	2.31	2.31	2.31	2.31	2.31
	-2	2.97	2.97	2.98	2.96	2.91	2.84	2.84	2.84	2.84	2.84
	2	3.22	3.28	3.30	3.31	3.30	3.28	3.28	3.28	3.28	3.28
	7	3.72	3.73	3.78	3.81	3.82	3.80	3.80	3.80	3.80	3.80
	10	3.90	3.99	4.07	4.14	4.21	4.27	4.27	4.27	4.27	4.27
	12	4.03	4.18	4.28	4.38	4.49	4.62	4.62	4.62	4.62	4.62
	15	4.21	4.22	4.35	4.47	4.61	4.75	4.75	4.75	4.75	4.75
20	4.09	4.35	4.52	4.70	4.88	5.05	5.05	5.05	5.05	5.05	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =55°C**Outdoor unit HWT-801H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.70	4.70	4.70	4.70	4.70	4.70	4.70	4.70	4.70	4.70
	-20	5.49	4.94	4.39	3.84	3.74	3.74	3.74	3.74	3.74	3.74
	-15	6.27	5.64	5.02	4.39	4.28	4.28	4.28	4.28	4.28	4.28
	-10	7.35	6.62	5.88	5.15	5.01	5.01	5.01	5.01	5.01	5.01
	-7	8.00	7.20	6.40	5.60	4.80	4.09	4.09	4.09	4.09	4.09
	-2	9.31	8.38	7.45	6.52	5.59	4.76	4.76	4.76	4.76	4.76
	2	10.36	9.32	8.29	7.25	6.22	5.30	5.30	5.30	5.30	5.30
	7	11.77	10.59	9.42	8.24	7.06	5.89	5.89	5.89	5.89	5.89
	10	12.31	11.08	9.85	8.62	7.39	6.16	6.16	6.16	6.16	6.16
	12	12.67	11.40	10.14	8.87	7.60	6.34	6.34	6.34	6.34	6.34
	15	13.21	11.89	10.57	9.25	7.93	6.61	6.61	6.61	6.61	6.61
20	13.44	12.10	10.75	9.41	8.06	6.72	6.72	6.72	6.72	6.72	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.96	2.96	2.96	2.96	2.96	2.96	2.96	2.96	2.96	2.96
	-20	3.10	2.99	2.72	2.46	2.41	2.41	2.41	2.41	2.41	2.41
	-15	3.24	3.02	2.72	2.44	2.39	2.39	2.39	2.39	2.39	2.39
	-10	3.45	3.21	2.90	2.60	2.54	2.54	2.54	2.54	2.54	2.54
	-7	3.57	3.27	2.95	2.65	2.37	2.13	2.13	2.13	2.13	2.13
	-2	3.65	3.38	3.03	2.70	2.39	2.12	2.12	2.12	2.12	2.12
	2	3.72	3.38	3.03	2.69	2.37	2.09	2.09	2.09	2.09	2.09
	7	3.79	3.40	3.02	2.66	2.31	1.97	1.97	1.97	1.97	1.97
	10	3.79	3.31	2.93	2.58	2.24	1.91	1.91	1.91	1.91	1.91
	12	3.79	3.24	2.87	2.51	2.18	1.87	1.87	1.87	1.87	1.87
	15	3.79	3.33	2.93	2.55	2.20	1.88	1.88	1.88	1.88	1.88
20	3.84	3.30	2.88	2.48	2.13	1.81	1.81	1.81	1.81	1.81	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.59	1.59	1.59	1.59	1.59	1.59	1.59	1.59	1.59	1.59
	-20	1.77	1.65	1.61	1.56	1.55	1.55	1.55	1.55	1.55	1.55
	-15	1.94	1.87	1.84	1.80	1.79	1.79	1.79	1.79	1.79	1.79
	-10	2.13	2.06	2.03	1.98	1.97	1.97	1.97	1.97	1.97	1.97
	-7	2.24	2.20	2.17	2.11	2.03	1.92	1.92	1.92	1.92	1.92
	-2	2.55	2.48	2.46	2.41	2.34	2.25	2.25	2.25	2.25	2.25
	2	2.78	2.76	2.74	2.69	2.62	2.53	2.53	2.53	2.53	2.53
	7	3.11	3.12	3.11	3.09	3.05	2.98	2.98	2.98	2.98	2.98
	10	3.25	3.35	3.36	3.34	3.30	3.21	3.21	3.21	3.21	3.21
	12	3.34	3.52	3.54	3.53	3.49	3.39	3.39	3.39	3.39	3.39
	15	3.49	3.57	3.61	3.63	3.60	3.52	3.52	3.52	3.52	3.52
20	3.50	3.66	3.74	3.79	3.79	3.71	3.71	3.71	3.71	3.71	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-801H8(R)W-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	2.94	2.88	—
	-20	3.58	3.53	3.48
	-15	4.21	4.17	4.12
	-10	5.00	4.88	4.76
	-7	5.47	5.31	5.15
	-2	6.41	6.22	6.03
	2	7.17	6.96	6.74
	7	8.14	7.92	7.69
	10	8.56	8.36	8.16
	12	8.84	8.65	8.47
	15	9.25	9.10	8.94
20	9.95	9.84	9.72	

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	1.43	1.67	—
	-20	1.54	1.86	2.19
	-15	1.64	1.94	2.24
	-10	1.68	1.99	2.29
	-7	1.71	2.02	2.32
	-2	1.75	2.08	2.41
	2	1.78	2.13	2.48
	7	1.78	2.14	2.50
	10	1.78	2.16	2.53
	12	1.78	2.17	2.55
	15	1.77	2.18	2.59
20	1.77	2.21	2.64	

COP		LWT (°C)		
		35	45	55
TO (°C)	-25	2.06	1.72	—
	-20	2.33	1.89	1.59
	-15	2.57	2.15	1.84
	-10	2.97	2.46	2.08
	-7	3.20	2.64	2.22
	-2	3.67	2.99	2.50
	2	4.03	3.27	2.72
	7	4.57	3.70	3.08
	10	4.81	3.88	3.22
	12	4.97	4.00	3.32
	15	5.22	4.17	3.46
20	5.62	4.46	3.68	

* Power input does not include water pump power.

* Heating capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C**Outdoor unit HWT-801H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	8.07	7.26	6.46	5.65	4.84	4.04	3.23	2.80	2.80	2.80
	27	8.25	7.43	6.60	5.78	4.95	4.13	3.61	3.61	3.61	3.61
	30	7.95	7.15	6.36	5.56	4.77	3.97	3.48	3.48	3.48	3.48
	35	7.44	6.70	5.95	5.21	4.46	3.72	3.26	3.26	3.26	3.26
	40	5.81	5.23	4.65	4.07	3.63	3.63	3.63	3.63	3.63	3.63
	43	4.83	4.35	3.86	3.38	3.02	3.02	3.02	3.02	3.02	3.02

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.95	1.65	1.45	1.26	1.09	0.94	0.80	0.73	0.73	0.73
	27	2.38	2.12	1.83	1.57	1.34	1.13	1.01	1.01	1.01	1.01
	30	2.48	2.19	1.89	1.62	1.38	1.16	1.04	1.04	1.04	1.04
	35	2.63	2.27	1.95	1.67	1.43	1.21	1.09	1.09	1.09	1.09
	40	2.85	2.67	2.38	2.11	1.92	1.92	1.92	1.92	1.92	1.92
	43	2.98	2.54	2.29	2.06	1.89	1.89	1.89	1.89	1.89	1.89

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.14	4.41	4.46	4.47	4.42	4.30	4.06	3.86	3.86	3.86
	27	3.46	3.51	3.61	3.68	3.71	3.66	3.57	3.57	3.57	3.57
	30	3.21	3.27	3.37	3.44	3.47	3.42	3.33	3.33	3.33	3.33
	35	2.83	2.95	3.05	3.11	3.13	3.07	2.98	2.98	2.98	2.98
	40	2.04	1.96	1.95	1.92	1.89	1.89	1.89	1.89	1.89	1.89
	43	1.62	1.71	1.69	1.64	1.59	1.59	1.59	1.59	1.59	1.59

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C**Outdoor unit HWT-801H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	9.41	8.47	7.53	6.59	5.65	4.71	3.76	2.82	2.22	2.22
	27	9.63	8.66	7.70	6.74	5.78	4.81	4.21	4.21	4.21	4.21
	30	9.27	8.34	7.42	6.49	5.56	4.64	4.06	4.06	4.06	4.06
	35	8.68	7.81	6.94	6.08	5.21	4.34	3.80	3.80	3.80	3.80
	40	7.97	7.17	6.37	5.58	4.98	4.98	4.98	4.98	4.98	4.98
	43	7.54	6.79	6.03	5.28	4.71	4.71	4.71	4.71	4.71	4.71

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.85	1.62	1.40	1.19	1.00	0.82	0.66	0.51	0.42	0.42
	27	2.37	2.15	1.84	1.55	1.29	1.06	0.92	0.92	0.92	0.92
	30	2.50	2.23	1.91	1.62	1.35	1.10	0.97	0.97	0.97	0.97
	35	2.72	2.34	2.00	1.70	1.42	1.17	1.03	1.03	1.03	1.03
	40	3.00	2.67	2.29	1.95	1.72	1.72	1.72	1.72	1.72	1.72
	43	3.16	2.71	2.33	2.00	1.78	1.78	1.78	1.78	1.78	1.78

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.09	5.22	5.38	5.52	5.65	5.74	5.74	5.57	5.31	5.31
	27	4.07	4.04	4.19	4.34	4.47	4.56	4.57	4.57	4.57	4.57
	30	3.71	3.74	3.88	4.01	4.13	4.20	4.20	4.20	4.20	4.20
	35	3.19	3.35	3.47	3.58	3.67	3.71	3.69	3.69	3.69	3.69
	40	2.66	2.69	2.79	2.86	2.89	2.89	2.89	2.89	2.89	2.89
	43	2.39	2.51	2.59	2.64	2.65	2.65	2.65	2.65	2.65	2.65

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C**Outdoor unit HWT-801H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	10.58	9.52	8.46	7.41	6.35	5.29	4.23	3.17	2.50	2.50
	27	10.82	9.74	8.66	7.58	6.49	5.41	4.33	3.25	2.44	2.44
	30	10.43	9.38	8.34	7.30	6.26	5.21	4.17	3.13	2.48	2.48
	35	9.76	8.78	7.81	6.83	5.86	4.88	3.90	2.93	2.56	2.56
	40	9.12	8.20	7.29	6.38	5.70	5.70	5.70	5.70	5.70	5.70
	43	8.73	7.86	6.98	6.11	5.46	5.46	5.46	5.46	5.46	5.46

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	1.84	1.61	1.37	1.15	0.95	0.77	0.62	0.48	0.40	0.40
	27	2.38	2.19	1.86	1.55	1.27	1.02	0.79	0.60	0.47	0.47
	30	2.53	2.29	1.94	1.62	1.33	1.07	0.83	0.62	0.51	0.51
	35	2.77	2.41	2.05	1.71	1.41	1.13	0.88	0.66	0.58	0.58
	40	3.05	2.68	2.30	1.96	1.73	1.73	1.73	1.73	1.73	1.73
	43	3.22	2.75	2.37	2.04	1.81	1.81	1.81	1.81	1.81	1.81

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.75	5.92	6.18	6.44	6.67	6.83	6.88	6.66	6.26	6.26
	27	4.54	4.45	4.67	4.89	5.11	5.31	5.45	5.42	5.19	5.19
	30	4.12	4.10	4.29	4.50	4.70	4.89	5.01	5.01	4.86	4.86
	35	3.52	3.64	3.81	3.99	4.16	4.33	4.44	4.44	4.39	4.39
	40	2.99	3.06	3.17	3.26	3.30	3.30	3.30	3.30	3.30	3.30
	43	2.71	2.86	2.94	3.00	3.02	3.02	3.02	3.02	3.02	3.02

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-801H8(R)W-E

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	6.31	7.37	8.26
	27	5.91	6.83	7.59
	30	5.74	6.59	7.31
	35	5.45	6.20	6.83
	40	5.16	5.81	6.35

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	1.53	1.43	1.35
	27	1.64	1.58	1.54
	30	1.68	1.65	1.62
	35	1.76	1.76	1.76
	40	1.84	1.87	1.90

COP		LWT (°C)		
		7	13	18
TO (°C)	20	4.12	5.15	6.12
	27	3.61	4.31	4.93
	30	3.41	3.99	4.50
	35	3.10	3.52	3.88
	40	2.81	3.11	3.35

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =35°C**Outdoor unit HWT-1101H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	6.02	5.42	4.82	4.21	3.61	3.17	3.17	3.17	3.17	3.17
	-20	7.03	6.32	5.62	4.92	4.22	3.70	3.70	3.70	3.70	3.70
	-15	8.03	7.23	6.42	5.62	4.82	4.23	4.23	4.23	4.23	4.23
	-10	9.57	8.61	7.65	6.70	5.74	5.04	5.04	5.04	5.04	5.04
	-7	10.49	9.44	8.39	7.34	6.29	5.25	4.20	4.14	4.14	4.14
	-2	12.21	10.99	9.77	8.54	7.32	6.10	4.88	4.82	4.82	4.82
	2	13.58	12.22	10.86	9.51	8.15	6.79	5.43	5.24	5.24	5.24
	7	15.50	13.95	12.40	10.85	9.30	7.75	6.20	4.65	3.10	2.58
	10	16.17	14.55	12.94	11.32	9.70	8.09	6.47	4.85	3.23	2.70
	12	16.62	14.96	13.30	11.63	9.97	8.31	6.65	4.99	3.32	2.77
	15	17.29	15.56	13.83	12.10	10.37	8.65	6.92	5.19	3.46	2.88
20	16.81	15.13	13.45	11.77	10.09	8.41	6.72	5.04	3.36	2.80	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.70	2.56	2.30	2.04	1.79	1.61	1.61	1.61	1.61	1.61
	-20	2.83	2.69	2.40	2.14	1.88	1.71	1.71	1.71	1.71	1.71
	-15	2.96	2.73	2.43	2.15	1.90	1.73	1.73	1.73	1.73	1.73
	-10	3.13	2.95	2.59	2.26	1.96	1.76	1.76	1.76	1.76	1.76
	-7	3.23	3.02	2.65	2.31	1.98	1.68	1.41	1.39	1.39	1.39
	-2	3.42	3.15	2.75	2.36	2.01	1.68	1.38	1.36	1.36	1.36
	2	3.57	3.19	2.76	2.36	1.98	1.64	1.33	1.29	1.29	1.29
	7	3.66	3.16	2.70	2.27	1.89	1.54	1.23	0.95	0.72	0.65
	10	3.63	3.06	2.60	2.19	1.81	1.47	1.16	0.90	0.67	0.61
	12	3.60	2.98	2.53	2.12	1.75	1.41	1.12	0.86	0.64	0.58
	15	3.57	3.18	2.69	2.24	1.83	1.46	1.14	0.85	0.61	0.54
20	3.72	3.10	2.61	2.17	1.76	1.39	1.06	0.77	0.52	0.45	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.23	2.11	2.10	2.07	2.02	1.97	1.97	1.97	1.97	1.97
	-20	2.48	2.35	2.34	2.30	2.24	2.16	2.16	2.16	2.16	2.16
	-15	2.71	2.65	2.64	2.61	2.53	2.44	2.44	2.44	2.44	2.44
	-10	3.06	2.92	2.95	2.96	2.93	2.87	2.87	2.87	2.87	2.87
	-7	3.25	3.13	3.16	3.18	3.17	3.11	2.98	2.97	2.97	2.97
	-2	3.57	3.48	3.56	3.62	3.65	3.64	3.55	3.54	3.54	3.54
	2	3.80	3.84	3.94	4.04	4.11	4.14	4.09	4.08	4.08	4.08
	7	4.23	4.42	4.60	4.77	4.93	5.04	5.05	4.88	4.33	4.00
	10	4.46	4.76	4.97	5.18	5.37	5.51	5.56	5.40	4.81	4.45
	12	4.61	5.02	5.25	5.49	5.71	5.88	5.95	5.80	5.18	4.80
	15	4.84	4.89	5.14	5.40	5.66	5.90	6.07	6.07	5.66	5.34
20	4.52	4.89	5.15	5.43	5.72	6.03	6.32	6.52	6.46	6.30	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =45°C**Outdoor unit HWT-1101H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	5.79	5.21	4.63	4.05	3.47	3.04	3.04	3.04	3.04	3.04
	-20	6.85	6.16	5.48	4.79	4.11	3.60	3.60	3.60	3.60	3.60
	-15	7.91	7.11	6.32	5.53	4.74	4.16	4.16	4.16	4.16	4.16
	-10	9.42	8.48	7.54	6.59	5.65	4.96	4.96	4.96	4.96	4.96
	-7	10.33	9.30	8.26	7.23	6.20	5.17	4.13	4.08	4.08	4.08
	-2	11.94	10.74	9.55	8.35	7.16	5.97	4.77	4.71	4.71	4.71
	2	13.22	11.90	10.58	9.25	7.93	6.61	5.29	5.22	5.22	5.22
	7	15.24	13.71	12.19	10.66	9.14	7.62	6.09	5.88	5.88	5.88
	10	15.89	14.30	12.71	11.12	9.53	7.94	6.35	6.13	6.13	6.13
	12	16.32	14.69	13.06	11.42	9.79	8.16	6.53	6.30	6.30	6.30
	15	16.97	15.27	13.58	11.88	10.18	8.49	6.79	6.55	6.55	6.55
20	16.68	15.01	13.34	11.68	10.01	8.34	6.67	6.44	6.44	6.44	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	3.24	2.96	2.67	2.36	2.06	1.83	1.83	1.83	1.83	1.83
	-20	3.38	3.11	2.80	2.49	2.19	1.96	1.96	1.96	1.96	1.96
	-15	3.52	3.19	2.85	2.53	2.22	2.00	2.00	2.00	2.00	2.00
	-10	3.75	3.44	3.05	2.69	2.35	2.12	2.12	2.12	2.12	2.12
	-7	3.89	3.54	3.12	2.74	2.39	2.07	1.79	1.78	1.78	1.78
	-2	4.02	3.69	3.24	2.81	2.41	2.03	1.69	1.67	1.67	1.67
	2	4.12	3.68	3.24	2.81	2.40	2.00	1.61	1.59	1.59	1.59
	7	4.28	3.82	3.32	2.85	2.41	1.99	1.60	1.55	1.55	1.55
	10	4.27	3.75	3.25	2.78	2.32	1.90	1.49	1.44	1.44	1.44
	12	4.27	3.69	3.19	2.72	2.26	1.83	1.42	1.36	1.36	1.36
	15	4.27	3.85	3.31	2.80	2.31	1.86	1.43	1.37	1.37	1.37
20	4.36	3.73	3.17	2.65	2.16	1.72	1.32	1.26	1.26	1.26	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.79	1.76	1.74	1.71	1.69	1.67	1.67	1.67	1.67	1.67
	-20	2.03	1.98	1.95	1.92	1.88	1.83	1.83	1.83	1.83	1.83
	-15	2.25	2.23	2.22	2.19	2.14	2.08	2.08	2.08	2.08	2.08
	-10	2.51	2.47	2.47	2.45	2.40	2.34	2.34	2.34	2.34	2.34
	-7	2.66	2.62	2.65	2.64	2.59	2.49	2.30	2.29	2.29	2.29
	-2	2.97	2.91	2.95	2.97	2.97	2.93	2.83	2.82	2.82	2.82
	2	3.21	3.23	3.26	3.29	3.30	3.30	3.28	3.28	3.28	3.28
	7	3.56	3.59	3.67	3.74	3.79	3.82	3.80	3.79	3.79	3.79
	10	3.72	3.82	3.91	4.01	4.10	4.19	4.26	4.27	4.27	4.27
	12	3.82	3.98	4.09	4.20	4.32	4.46	4.61	4.64	4.64	4.64
	15	3.98	3.97	4.10	4.25	4.41	4.57	4.75	4.78	4.78	4.78
20	3.83	4.03	4.21	4.41	4.63	4.85	5.07	5.09	5.09	5.09	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =55°C**Outdoor unit HWT-1101H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	5.55	5.00	4.70	4.70	4.70	4.70	4.70	4.70	4.70	4.70
	-20	6.67	6.00	5.33	4.67	4.00	3.51	3.51	3.51	3.51	3.51
	-15	7.78	7.00	6.22	5.45	4.67	4.09	4.09	4.09	4.09	4.09
	-10	9.27	8.35	7.42	6.49	5.56	4.88	4.88	4.88	4.88	4.88
	-7	10.17	9.15	8.14	7.12	6.10	5.09	4.07	4.01	4.01	4.01
	-2	11.66	10.50	9.33	8.17	7.00	5.83	4.67	4.60	4.60	4.60
	2	12.86	11.57	10.29	9.00	7.72	6.43	5.14	5.08	5.08	5.08
	7	14.97	13.47	11.98	10.48	8.98	7.49	5.99	5.78	5.78	5.78
	10	15.60	14.04	12.48	10.92	9.36	7.80	6.24	6.02	6.02	6.02
	12	16.02	14.42	12.82	11.21	9.61	8.01	6.41	6.18	6.18	6.18
	15	16.65	14.99	13.32	11.66	9.99	8.33	6.66	6.43	6.43	6.43
20	16.55	14.90	13.24	11.59	9.93	8.28	6.62	6.39	6.39	6.39	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	3.77	3.32	3.17	3.17	3.17	3.17	3.17	3.17	3.17	3.17
	-20	3.93	3.54	3.19	2.86	2.53	2.31	2.31	2.31	2.31	2.31
	-15	4.08	3.71	3.31	2.93	2.56	2.31	2.31	2.31	2.31	2.31
	-10	4.37	4.02	3.58	3.16	2.77	2.49	2.49	2.49	2.49	2.49
	-7	4.54	4.12	3.67	3.24	2.84	2.46	2.12	2.10	2.10	2.10
	-2	4.61	4.22	3.75	3.30	2.87	2.47	2.09	2.07	2.07	2.07
	2	4.67	4.18	3.71	3.27	2.84	2.43	2.05	2.03	2.03	2.03
	7	4.90	4.37	3.86	3.36	2.89	2.44	2.00	1.94	1.94	1.94
	10	4.92	4.27	3.75	3.26	2.79	2.35	1.94	1.88	1.88	1.88
	12	4.94	4.20	3.67	3.18	2.72	2.29	1.88	1.83	1.83	1.83
	15	4.96	4.37	3.79	3.25	2.76	2.30	1.89	1.83	1.83	1.83
20	5.00	4.30	3.69	3.14	2.63	2.18	1.79	1.74	1.74	1.74	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.47	1.50	1.48	1.48	1.48	1.48	1.48	1.48	1.48	1.48
	-20	1.70	1.70	1.67	1.63	1.58	1.52	1.52	1.52	1.52	1.52
	-15	1.91	1.89	1.88	1.86	1.82	1.78	1.78	1.78	1.78	1.78
	-10	2.12	2.08	2.08	2.06	2.01	1.96	1.96	1.96	1.96	1.96
	-7	2.24	2.22	2.22	2.20	2.15	2.06	1.92	1.91	1.91	1.91
	-2	2.53	2.48	2.49	2.48	2.44	2.36	2.23	2.22	2.22	2.22
	2	2.75	2.77	2.77	2.75	2.71	2.64	2.51	2.50	2.50	2.50
	7	3.06	3.08	3.11	3.12	3.11	3.07	2.99	2.97	2.97	2.97
	10	3.17	3.29	3.33	3.35	3.35	3.32	3.22	3.20	3.20	3.20
	12	3.24	3.44	3.49	3.53	3.54	3.50	3.40	3.38	3.38	3.38
	15	3.36	3.43	3.51	3.58	3.62	3.61	3.52	3.50	3.50	3.50
20	3.31	3.46	3.59	3.69	3.77	3.79	3.70	3.68	3.68	3.68	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-1101H8(R)W-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	2.94	2.88	—
	-20	3.58	3.53	3.48
	-15	4.21	4.17	4.12
	-10	5.00	4.88	4.76
	-7	5.47	5.31	5.15
	-2	6.41	6.22	6.03
	2	7.17	6.96	6.74
	7	8.14	7.92	7.69
	10	8.56	8.36	8.16
	12	8.84	8.65	8.47
	15	9.25	9.10	8.94
20	9.95	9.84	9.72	

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	1.43	1.67	—
	-20	1.54	1.86	2.19
	-15	1.64	1.94	2.24
	-10	1.68	1.99	2.29
	-7	1.71	2.02	2.32
	-2	1.75	2.08	2.41
	2	1.78	2.13	2.48
	7	1.78	2.14	2.50
	10	1.78	2.16	2.53
	12	1.78	2.17	2.55
	15	1.77	2.18	2.59
20	1.77	2.21	2.64	

COP		LWT (°C)		
		35	45	55
TO (°C)	-25	2.06	1.72	—
	-20	2.33	1.89	1.59
	-15	2.57	2.15	1.84
	-10	2.97	2.46	2.08
	-7	3.20	2.64	2.22
	-2	3.67	2.99	2.50
	2	4.03	3.27	2.72
	7	4.57	3.70	3.08
	10	4.81	3.88	3.22
	12	4.97	4.00	3.32
	15	5.22	4.17	3.46
20	5.62	4.46	3.68	

* Power input does not include water pump power.

* Heating capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C**Outdoor unit HWT-1101H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	9.40	8.46	7.52	6.58	5.64	4.70	3.76	2.82	2.73	2.73
	27	9.68	8.71	7.75	6.78	5.81	4.84	3.87	3.53	3.53	3.53
	30	9.35	8.42	7.48	6.55	5.61	4.68	3.74	3.41	3.41	3.41
	35	8.81	7.93	7.05	6.17	5.29	4.41	3.52	3.21	3.21	3.21
	40	6.90	6.21	5.52	4.83	4.14	3.59	3.59	3.59	3.59	3.59
	43	5.75	5.18	4.60	4.03	3.45	2.99	2.99	2.99	2.99	2.99

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	2.33	1.96	1.71	1.48	1.26	1.07	0.89	0.73	0.71	0.71
	27	2.92	2.61	2.23	1.89	1.58	1.31	1.07	0.99	0.99	0.99
	30	3.06	2.73	2.32	1.96	1.63	1.35	1.11	1.03	1.03	1.03
	35	3.29	2.86	2.43	2.04	1.70	1.41	1.16	1.08	1.08	1.08
	40	3.50	3.20	2.82	2.47	2.15	1.91	1.91	1.91	1.91	1.91
	43	3.62	2.99	2.67	2.37	2.09	1.88	1.88	1.88	1.88	1.88

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.03	4.31	4.40	4.45	4.47	4.41	4.23	3.87	3.83	3.83
	27	3.32	3.33	3.47	3.59	3.68	3.71	3.62	3.55	3.55	3.55
	30	3.06	3.09	3.22	3.34	3.43	3.46	3.38	3.31	3.31	3.31
	35	2.68	2.78	2.91	3.02	3.11	3.13	3.04	2.97	2.97	2.97
	40	1.97	1.94	1.96	1.95	1.93	1.88	1.88	1.88	1.88	1.88
	43	1.59	1.73	1.72	1.70	1.65	1.59	1.59	1.59	1.59	1.59

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C**Outdoor unit HWT-1101H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	10.94	9.85	8.75	7.66	6.56	5.47	4.38	3.28	2.19	2.16
	27	11.28	10.15	9.02	7.90	6.77	5.64	4.51	4.11	4.11	4.11
	30	10.91	9.81	8.72	7.63	6.54	5.45	4.36	3.98	3.98	3.98
	35	10.28	9.25	8.22	7.20	6.17	5.14	4.11	3.75	3.75	3.75
	40	9.22	8.30	7.37	6.45	5.53	4.80	4.80	4.80	4.80	4.80
	43	8.58	7.72	6.86	6.01	5.15	4.47	4.47	4.47	4.47	4.47

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	2.36	1.98	1.69	1.43	1.19	0.96	0.76	0.58	0.41	0.41
	27	2.99	2.67	2.27	1.90	1.56	1.26	0.99	0.90	0.90	0.90
	30	3.15	2.80	2.37	1.98	1.63	1.32	1.04	0.95	0.95	0.95
	35	3.42	2.95	2.50	2.10	1.73	1.40	1.11	1.02	1.02	1.02
	40	3.70	3.27	2.77	2.32	1.93	1.66	1.66	1.66	1.66	1.66
	43	3.87	3.23	2.75	2.32	1.95	1.69	1.69	1.69	1.69	1.69

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.64	4.98	5.17	5.35	5.53	5.67	5.75	5.68	5.29	5.27
	27	3.77	3.80	3.98	4.16	4.34	4.48	4.57	4.57	4.57	4.57
	30	3.46	3.51	3.68	3.85	4.01	4.14	4.20	4.20	4.20	4.20
	35	3.01	3.14	3.29	3.43	3.57	3.67	3.70	3.68	3.68	3.68
	40	2.49	2.53	2.66	2.78	2.87	2.89	2.89	2.89	2.89	2.89
	43	2.22	2.39	2.50	2.59	2.64	2.64	2.64	2.64	2.64	2.64

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C**Outdoor unit HWT-1101H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	12.32	11.09	9.86	8.62	7.39	6.16	4.93	3.70	2.46	2.44
	27	12.65	11.39	10.12	8.86	7.59	6.33	5.06	3.80	2.53	2.37
	30	12.21	10.99	9.77	8.55	7.33	6.10	4.88	3.66	2.44	2.42
	35	11.47	10.32	9.18	8.03	6.88	5.74	4.59	3.44	2.51	2.51
	40	10.70	9.63	8.56	7.49	6.42	5.57	5.57	5.57	5.57	5.57
	43	10.23	9.21	8.18	7.16	6.14	5.33	5.33	5.33	5.33	5.33

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	2.28	2.00	1.69	1.40	1.15	0.92	0.72	0.54	0.40	0.39
	27	2.99	2.75	2.31	1.92	1.55	1.23	0.94	0.69	0.48	0.46
	30	3.19	2.88	2.43	2.01	1.63	1.29	0.99	0.73	0.50	0.50
	35	3.52	3.04	2.57	2.13	1.73	1.37	1.05	0.77	0.57	0.57
	40	3.81	3.35	2.84	2.38	1.97	1.69	1.69	1.69	1.69	1.69
	43	3.99	3.41	2.90	2.45	2.05	1.77	1.77	1.77	1.77	1.77

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	5.40	5.55	5.84	6.14	6.44	6.70	6.87	6.81	6.24	6.21
	27	4.23	4.14	4.37	4.63	4.89	5.15	5.37	5.46	5.23	5.15
	30	3.83	3.81	4.02	4.25	4.49	4.73	4.93	5.03	4.84	4.83
	35	3.26	3.39	3.58	3.77	3.98	4.19	4.37	4.46	4.38	4.38
	40	2.80	2.88	3.02	3.15	3.25	3.30	3.30	3.30	3.30	3.30
	43	2.56	2.70	2.82	2.93	3.00	3.01	3.01	3.01	3.01	3.01

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation**Outdoor unit HWT-1101H8(R)W-E**

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	7.18	8.22	9.08
	27	6.62	7.59	8.40
	30	6.39	7.32	8.11
	35	5.99	6.88	7.62
	40	5.59	6.43	7.13

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	1.59	1.56	1.53
	27	1.77	1.76	1.75
	30	1.85	1.85	1.85
	35	1.98	2.00	2.01
	40	2.11	2.14	2.17

COP		LWT (°C)		
		7	13	18
TO (°C)	20	4.52	5.28	5.93
	27	3.74	4.31	4.79
	30	3.45	3.96	4.38
	35	3.03	3.45	3.79
	40	2.65	3.00	3.29

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =35°C**Outdoor unit HWT-1401H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	7.67	6.90	6.14	5.37	4.60	3.84	3.36	3.36	3.36	3.36
	-20	8.88	7.99	7.10	6.21	5.33	4.44	3.89	3.89	3.89	3.89
	-15	10.08	9.07	8.06	7.06	6.05	5.04	4.41	4.41	4.41	4.41
	-10	11.94	10.74	9.55	8.36	7.16	5.97	5.23	5.23	5.23	5.23
	-7	13.05	11.75	10.44	9.14	7.83	6.53	5.22	4.29	4.29	4.29
	-2	14.89	13.40	11.91	10.42	8.93	7.45	5.96	4.89	4.89	4.89
	2	16.13	14.52	12.90	11.29	9.68	8.07	6.45	5.18	5.18	5.18
	7	18.39	16.55	14.71	12.87	11.03	9.20	7.36	5.52	3.68	2.55
	10	19.57	17.61	15.65	13.70	11.74	9.78	7.83	5.87	3.91	2.71
	12	20.35	18.32	16.28	14.25	12.21	10.18	8.14	6.11	4.07	2.82
	15	20.35	18.32	16.28	14.25	12.21	10.18	8.14	6.11	4.07	2.82
20	20.35	18.32	16.28	14.25	12.21	10.18	8.14	6.11	4.07	2.82	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	3.70	3.27	2.90	2.54	2.20	1.88	1.69	1.69	1.69	1.69
	-20	3.88	3.43	3.02	2.64	2.29	1.96	1.77	1.77	1.77	1.77
	-15	4.05	3.52	3.07	2.67	2.30	1.97	1.79	1.79	1.79	1.79
	-10	4.35	3.83	3.32	2.85	2.42	2.03	1.81	1.81	1.81	1.81
	-7	4.53	3.91	3.39	2.91	2.46	2.05	1.68	1.43	1.43	1.43
	-2	4.69	4.04	3.48	2.96	2.48	2.04	1.64	1.38	1.38	1.38
	2	4.62	3.98	3.41	2.89	2.40	1.96	1.56	1.27	1.27	1.27
	7	4.73	4.02	3.40	2.83	2.32	1.86	1.46	1.10	0.80	0.64
	10	4.71	4.03	3.39	2.81	2.29	1.83	1.42	1.06	0.76	0.61
	12	4.69	4.01	3.37	2.78	2.26	1.79	1.38	1.03	0.73	0.58
	15	4.64	4.05	3.40	2.80	2.27	1.79	1.37	1.00	0.69	0.53
20	4.55	4.12	3.45	2.84	2.28	1.78	1.34	0.95	0.62	0.45	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	2.07	2.11	2.12	2.11	2.09	2.04	1.99	1.99	1.99	1.99
	-20	2.29	2.33	2.35	2.35	2.33	2.26	2.19	2.19	2.19	2.19
	-15	2.49	2.58	2.62	2.65	2.63	2.56	2.47	2.47	2.47	2.47
	-10	2.74	2.81	2.88	2.93	2.96	2.94	2.89	2.89	2.89	2.89
	-7	2.88	3.00	3.08	3.14	3.18	3.18	3.11	3.00	3.00	3.00
	-2	3.17	3.31	3.42	3.52	3.60	3.65	3.63	3.55	3.55	3.55
	2	3.49	3.65	3.78	3.91	4.03	4.11	4.14	4.07	4.07	4.07
	7	3.89	4.12	4.33	4.54	4.75	4.94	5.05	5.01	4.60	3.98
	10	4.16	4.37	4.61	4.87	5.12	5.36	5.53	5.53	5.13	4.47
	12	4.34	4.57	4.84	5.12	5.41	5.68	5.90	5.93	5.54	4.84
	15	4.39	4.52	4.79	5.08	5.39	5.69	5.96	6.10	5.88	5.30
20	4.47	4.45	4.72	5.02	5.35	5.71	6.08	6.41	6.54	6.30	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =45°C**Outdoor unit HWT-1401H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	7.69	6.92	6.15	5.38	4.61	3.84	3.37	3.37	3.37	3.37
	-20	8.77	7.90	7.02	6.14	5.26	4.39	3.84	3.84	3.84	3.84
	-15	10.07	9.06	8.05	7.05	6.04	5.03	4.41	4.41	4.41	4.41
	-10	11.86	10.67	9.48	8.30	7.11	5.93	5.19	5.19	5.19	5.19
	-7	12.93	11.64	10.34	9.05	7.76	6.47	5.17	4.25	4.25	4.25
	-2	14.68	13.21	11.74	10.28	8.81	7.34	5.87	4.82	4.82	4.82
	2	16.17	14.55	12.93	11.32	9.70	8.08	6.47	5.31	5.31	5.31
	7	18.14	16.33	14.51	12.70	10.88	9.07	7.26	5.83	5.83	5.83
	10	19.34	17.41	15.47	13.54	11.60	9.67	7.74	6.21	6.21	6.21
	12	20.14	18.13	16.11	14.10	12.08	10.07	8.06	6.47	6.47	6.47
	15	19.83	17.85	15.87	13.88	11.90	9.92	7.93	6.37	6.37	6.37
20	19.33	17.39	15.46	13.53	11.60	9.66	7.73	6.47	6.47	6.47	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.20	3.82	3.44	3.05	2.66	2.26	2.00	2.00	2.00	2.00
	-20	4.37	3.92	3.51	3.11	2.71	2.31	2.07	2.07	2.07	2.07
	-15	4.60	4.10	3.62	3.16	2.73	2.33	2.09	2.09	2.09	2.09
	-10	4.88	4.45	3.88	3.36	2.88	2.45	2.20	2.20	2.20	2.20
	-7	5.05	4.62	4.00	3.44	2.93	2.48	2.08	1.82	1.82	1.82
	-2	5.23	4.72	4.09	3.51	2.97	2.47	2.01	1.70	1.70	1.70
	2	5.36	4.60	4.03	3.49	2.96	2.45	1.96	1.62	1.62	1.62
	7	5.46	4.73	4.09	3.48	2.92	2.39	1.90	1.54	1.54	1.54
	10	5.47	4.79	4.13	3.51	2.92	2.36	1.84	1.46	1.46	1.46
	12	5.47	4.80	4.14	3.51	2.91	2.34	1.80	1.40	1.40	1.40
	15	5.32	4.73	4.05	3.41	2.80	2.24	1.71	1.33	1.33	1.33
20	5.08	4.60	3.89	3.23	2.62	2.07	1.57	1.27	1.27	1.27	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.83	1.81	1.79	1.76	1.73	1.70	1.68	1.68	1.68	1.68
	-20	2.01	2.01	2.00	1.98	1.94	1.90	1.86	1.86	1.86	1.86
	-15	2.19	2.21	2.22	2.23	2.21	2.16	2.11	2.11	2.11	2.11
	-10	2.43	2.40	2.44	2.47	2.47	2.42	2.36	2.36	2.36	2.36
	-7	2.56	2.52	2.58	2.63	2.65	2.61	2.49	2.33	2.33	2.33
	-2	2.81	2.80	2.87	2.93	2.97	2.97	2.93	2.84	2.84	2.84
	2	3.02	3.16	3.21	3.25	3.28	3.30	3.30	3.28	3.28	3.28
	7	3.32	3.45	3.55	3.64	3.73	3.80	3.82	3.79	3.79	3.79
	10	3.54	3.64	3.75	3.86	3.98	4.09	4.20	4.27	4.27	4.27
	12	3.68	3.78	3.90	4.02	4.15	4.30	4.47	4.62	4.62	4.62
	15	3.73	3.77	3.92	4.08	4.25	4.43	4.63	4.80	4.80	4.80
20	3.81	3.78	3.98	4.19	4.42	4.67	4.93	5.09	5.09	5.09	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load heating capacity and input (peak)LWT (°C) =55°C**Outdoor unit HWT-1401H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	7.70	6.93	6.16	5.39	4.70	4.70	4.70	4.70	4.70	4.70
	-20	8.67	7.80	6.94	6.07	5.20	4.34	3.80	3.80	3.80	3.80
	-15	10.05	9.05	8.04	7.04	6.03	5.03	4.40	4.40	4.40	4.40
	-10	11.78	10.60	9.42	8.24	7.07	5.89	5.16	5.16	5.16	5.16
	-7	12.81	11.53	10.25	8.97	7.69	6.41	5.12	4.21	4.21	4.21
	-2	14.47	13.02	11.58	10.13	8.68	7.24	5.79	4.75	4.75	4.75
	2	16.20	14.58	12.96	11.34	9.72	8.10	6.48	5.32	5.32	5.32
	7	17.89	16.10	14.31	12.52	10.73	8.95	7.16	5.75	5.75	5.75
	10	19.11	17.20	15.29	13.38	11.47	9.56	7.65	6.14	6.14	6.14
	12	19.93	17.94	15.94	13.95	11.96	9.97	7.97	6.40	6.40	6.40
	15	19.32	17.39	15.46	13.52	11.59	9.66	7.73	6.46	6.46	6.46
20	18.30	16.47	14.64	12.81	10.98	9.15	7.32	6.39	6.39	6.39	

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	4.69	4.42	3.97	3.54	3.17	3.17	3.17	3.17	3.17	3.17
	-20	4.87	4.54	4.05	3.57	3.12	2.69	2.44	2.44	2.44	2.44
	-15	5.14	4.85	4.27	3.73	3.21	2.73	2.44	2.44	2.44	2.44
	-10	5.40	5.19	4.56	3.97	3.41	2.90	2.60	2.60	2.60	2.60
	-7	5.56	5.30	4.65	4.04	3.47	2.95	2.48	2.17	2.17	2.17
	-2	5.77	5.34	4.69	4.07	3.49	2.95	2.45	2.12	2.12	2.12
	2	6.10	5.34	4.70	4.09	3.52	2.97	2.45	2.10	2.10	2.10
	7	6.19	5.32	4.67	4.04	3.45	2.88	2.34	1.94	1.94	1.94
	10	6.23	5.40	4.70	4.05	3.43	2.85	2.31	1.91	1.91	1.91
	12	6.25	5.45	4.72	4.04	3.41	2.82	2.28	1.88	1.88	1.88
	15	6.01	5.28	4.54	3.86	3.23	2.67	2.15	1.84	1.84	1.84
20	5.60	4.94	4.21	3.54	2.95	2.41	1.95	1.74	1.74	1.74	

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	-25	1.64	1.57	1.55	1.52	1.48	1.48	1.48	1.48	1.48	1.48
	-20	1.78	1.72	1.71	1.70	1.67	1.61	1.56	1.56	1.56	1.56
	-15	1.96	1.87	1.88	1.89	1.88	1.84	1.80	1.80	1.80	1.80
	-10	2.18	2.04	2.07	2.08	2.07	2.03	1.98	1.98	1.98	1.98
	-7	2.30	2.18	2.21	2.22	2.21	2.17	2.07	1.94	1.94	1.94
	-2	2.51	2.44	2.47	2.49	2.49	2.45	2.36	2.24	2.24	2.24
	2	2.66	2.73	2.76	2.77	2.77	2.73	2.64	2.53	2.53	2.53
	7	2.89	3.03	3.07	3.10	3.12	3.11	3.06	2.97	2.97	2.97
	10	3.07	3.19	3.25	3.31	3.35	3.35	3.31	3.21	3.21	3.21
	12	3.19	3.29	3.38	3.45	3.51	3.54	3.50	3.40	3.40	3.40
	15	3.22	3.30	3.40	3.50	3.58	3.62	3.59	3.51	3.51	3.51
20	3.27	3.34	3.48	3.62	3.73	3.79	3.76	3.68	3.68	3.68	

* Heating capacity and power input are maximum (peak) value during operation.

* Heating capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Heating capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-1401H8(R)W-E

Capacity (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	4.27	4.22	—
	-20	4.99	4.88	4.88
	-15	5.71	5.53	5.63
	-10	6.68	6.50	6.38
	-7	7.26	7.08	6.83
	-2	8.57	8.37	8.27
	2	9.61	9.40	9.42
	7	11.12	10.68	10.56
	10	12.02	11.63	11.51
	12	12.62	12.26	12.15
	15	12.85	12.53	12.45
20	13.22	12.97	12.95	

Power input (kW)		LWT (°C)		
		35	45	55
TO (°C)	-25	2.14	2.52	—
	-20	2.25	2.58	3.08
	-15	2.35	2.64	3.16
	-10	2.44	2.73	3.24
	-7	2.49	2.79	3.29
	-2	2.46	2.84	3.37
	2	2.44	2.88	3.44
	7	2.45	3.05	3.44
	10	2.43	3.03	3.53
	12	2.42	3.02	3.59
	15	2.42	3.02	3.59
20	2.42	3.01	3.60	

COP		LWT (°C)		
		35	45	55
TO (°C)	-25	2.00	1.67	—
	-20	2.22	1.89	1.59
	-15	2.43	2.09	1.78
	-10	2.74	2.38	1.97
	-7	2.92	2.54	2.08
	-2	3.48	2.95	2.45
	2	3.94	3.26	2.74
	7	4.54	3.50	3.07
	10	4.94	3.84	3.26
	12	5.21	4.06	3.38
	15	5.31	4.15	3.46
20	5.46	4.31	3.60	

* Power input does not include water pump power.

* Heating capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =7°C

Outdoor unit HWT-1401H8(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	11.60	10.44	9.28	8.12	6.96	5.80	4.64	3.48	2.74	2.74
	27	11.11	9.99	8.88	7.77	6.66	5.55	4.44	3.33	3.29	3.29
	30	10.89	9.80	8.71	7.63	6.54	5.45	4.36	3.27	3.23	3.23
	35	10.54	9.49	8.43	7.38	6.32	5.27	4.22	3.16	3.13	3.13
	40	9.26	8.33	7.41	6.48	5.56	4.63	3.92	3.92	3.92	3.92
	43	8.49	7.64	6.79	5.94	5.09	4.25	3.60	3.60	3.60	3.60

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	2.99	2.55	2.20	1.87	1.57	1.30	1.05	0.84	0.71	0.71
	27	3.65	3.17	2.68	2.24	1.85	1.50	1.20	0.95	0.94	0.94
	30	3.94	3.40	2.86	2.38	1.95	1.58	1.26	1.00	0.99	0.99
	35	4.41	3.73	3.12	2.58	2.11	1.70	1.35	1.07	1.06	1.06
	40	4.71	4.52	3.91	3.35	2.84	2.38	2.05	2.05	2.05	2.05
	43	4.89	4.56	3.98	3.44	2.94	2.48	2.16	2.16	2.16	2.16

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	3.88	4.09	4.22	4.34	4.43	4.47	4.40	4.15	3.83	3.83
	27	3.04	3.15	3.31	3.46	3.60	3.69	3.69	3.50	3.49	3.49
	30	2.77	2.88	3.04	3.20	3.35	3.45	3.45	3.28	3.26	3.26
	35	2.39	2.55	2.70	2.86	3.00	3.11	3.12	2.95	2.94	2.94
	40	1.97	1.84	1.89	1.93	1.95	1.95	1.91	1.91	1.91	1.91
	43	1.74	1.67	1.71	1.73	1.73	1.71	1.66	1.66	1.66	1.66

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =13°C**Outdoor unit HWT-1401H8(R)W-E**

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	13.44	12.10	10.75	9.41	8.06	6.72	5.38	4.03	2.69	2.16
	27	13.04	11.74	10.43	9.13	7.83	6.52	5.22	3.91	3.87	3.87
	30	12.87	11.59	10.30	9.01	7.72	6.44	5.15	3.86	3.82	3.82
	35	12.59	11.33	10.07	8.81	7.55	6.30	5.04	3.78	3.77	3.77
	40	11.35	10.22	9.08	7.95	6.81	5.68	4.94	4.94	4.94	4.94
	43	10.61	9.55	8.49	7.43	6.37	5.31	4.69	4.69	4.69	4.69

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	3.01	2.62	2.22	1.86	1.53	1.22	0.95	0.70	0.49	0.41
	27	3.78	3.29	2.78	2.30	1.88	1.49	1.15	0.86	0.85	0.85
	30	4.12	3.56	3.00	2.48	2.02	1.60	1.24	0.92	0.91	0.91
	35	4.67	3.97	3.33	2.75	2.23	1.77	1.37	1.02	1.02	1.02
	40	4.81	4.50	3.75	3.08	2.49	1.99	1.71	1.71	1.71	1.71
	43	4.90	4.46	3.71	3.06	2.49	2.01	1.77	1.77	1.77	1.77

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.47	4.62	4.83	5.06	5.29	5.50	5.68	5.75	5.53	5.27
	27	3.45	3.56	3.76	3.96	4.17	4.37	4.53	4.56	4.56	4.56
	30	3.13	3.25	3.44	3.63	3.83	4.02	4.17	4.19	4.19	4.19
	35	2.70	2.85	3.02	3.20	3.38	3.55	3.68	3.69	3.69	3.69
	40	2.36	2.27	2.42	2.58	2.74	2.86	2.89	2.89	2.89	2.89
	43	2.17	2.14	2.29	2.43	2.55	2.64	2.65	2.65	2.65	2.65

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications part load cooling capacity and input LWT (°C) =18°C

Outdoor unit HWT-1401H8(R)W-E

Capacity (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	14.76	13.28	11.81	10.33	8.86	7.38	5.90	4.43	2.95	2.37
	27	14.24	12.81	11.39	9.97	8.54	7.12	5.69	4.27	2.85	2.17
	30	14.01	12.61	11.21	9.81	8.41	7.01	5.61	4.20	2.80	2.26
	35	13.64	12.28	10.91	9.55	8.18	6.82	5.46	4.09	2.73	2.47
	40	11.92	10.73	9.54	8.34	7.15	5.96	5.47	5.47	5.47	5.47
	43	10.89	9.80	8.71	7.62	6.53	5.45	5.34	5.34	5.34	5.34

Power input (kW)		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	3.11	2.62	2.19	1.80	1.45	1.15	0.88	0.64	0.45	0.38
	27	3.84	3.29	2.75	2.26	1.82	1.43	1.08	0.78	0.53	0.43
	30	4.16	3.55	2.97	2.44	1.96	1.54	1.16	0.84	0.57	0.47
	35	4.68	3.95	3.31	2.72	2.18	1.71	1.29	0.92	0.62	0.57
	40	4.48	3.93	3.30	2.74	2.24	1.81	1.66	1.66	1.66	1.66
	43	4.36	3.73	3.16	2.65	2.20	1.81	1.77	1.77	1.77	1.77

COP		Load (%)									
		100	90	80	70	60	50	40	30	20	10
TO (°C)	20	4.75	5.08	5.39	5.73	6.09	6.44	6.75	6.88	6.56	6.16
	27	3.71	3.90	4.14	4.40	4.69	4.99	5.26	5.45	5.34	5.04
	30	3.37	3.55	3.77	4.02	4.28	4.56	4.82	5.01	4.95	4.77
	35	2.91	3.11	3.30	3.51	3.75	3.99	4.23	4.42	4.42	4.37
	40	2.66	2.73	2.89	3.04	3.19	3.29	3.30	3.30	3.30	3.30
	43	2.50	2.63	2.76	2.88	2.98	3.01	3.01	3.01	3.01	3.01

* Cooling capacity and power input at 100% load are shown at maximum compressor operating frequency.

* Power input does not include water pump power.

* Cooling capacity and power input at 100% load are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

Specifications Low noise operation

Outdoor unit HWT-1401H8(R)W-E

Capacity (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	9.04	10.36	11.46
	27	8.26	9.54	10.60
	30	7.92	9.18	10.23
	35	7.36	8.59	9.62
	40	5.85	7.36	8.61

Power input (kW)		LWT (°C)		
		7	13	18
TO (°C)	20	1.83	1.86	1.88
	27	2.18	2.23	2.27
	30	2.32	2.39	2.44
	35	2.57	2.65	2.72
	40	2.78	2.90	3.00

COP		LWT (°C)		
		7	13	18
TO (°C)	20	4.94	5.58	6.10
	27	3.80	4.28	4.67
	30	3.41	3.85	4.19
	35	2.86	3.24	3.54
	40	2.11	2.54	2.87

* Power input does not include water pump power.

* Cooling capacity and power input are measured in accordance with EN14511.

TO : Outdoor temperature (DB°C)

LWT : Leaving water temperature (°C)

2-7. Sound Data


2-7-1. Sound Characteristics (NC Curve)

▼ HWT-601HWH(M3,T6)W-E
HWT-1101XWH(M3,T6,T9)W-E

- Maximum/Rated/Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	29	29

△ Heating
○ Cooling

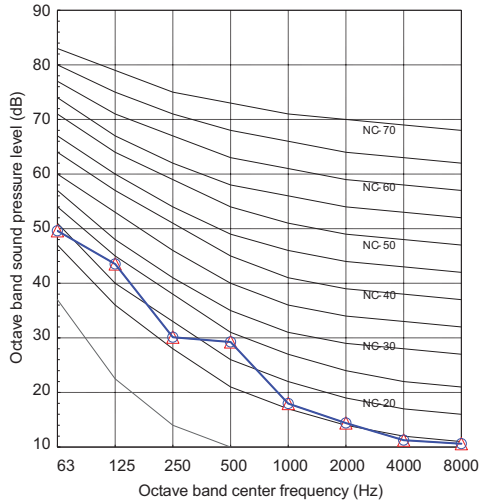


▼ HWT-1401XWH(M3,M6,T6,T9)W-E

- Maximum/Rated/Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	35	35

△ Heating
○ Cooling

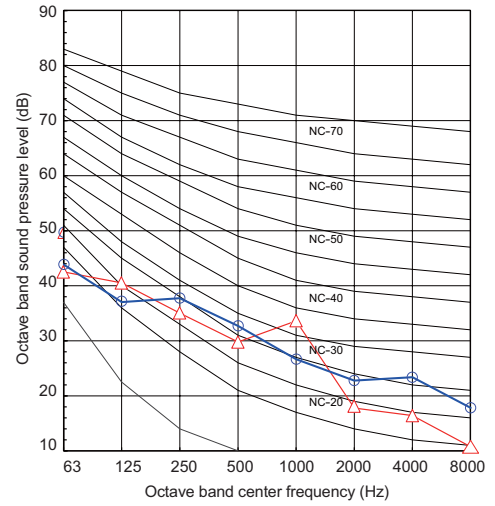


▼ HWT-602S21S(M)(M3,M6,T6)W-E
HWT-1102S21S(M)(M3,M6,T6,T9)W-E

Maximum operation (1 ZONE)

Sound pressure level (dB(A))	Cooling	Heating
	32	32


△ Heating
○ Cooling

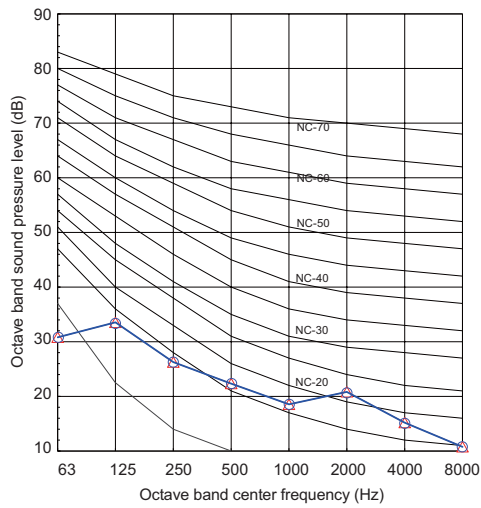

Maximum operation (2 ZONE)

Sound pressure level (dB(A))	Cooling	Heating
	32	32

△ Heating
○ Cooling

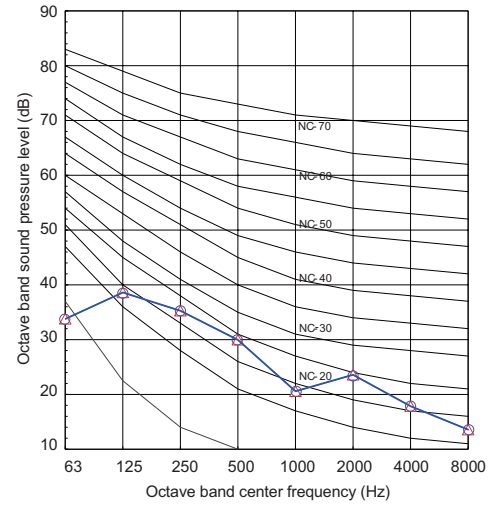


▼ HWT-1402S21S(M)(M3,M6,T6,T9)W-E

Maximum operation (1 ZONE)

Sound pressure level (dB(A))	Cooling	Heating
	32	32


△ Heating
○ Cooling

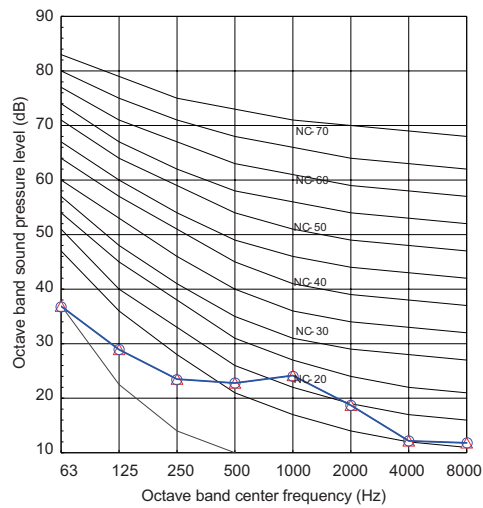

Maximum operation (2 ZONE)

Sound pressure level (dB(A))	Cooling	Heating
	32	32

△ Heating
○ Cooling

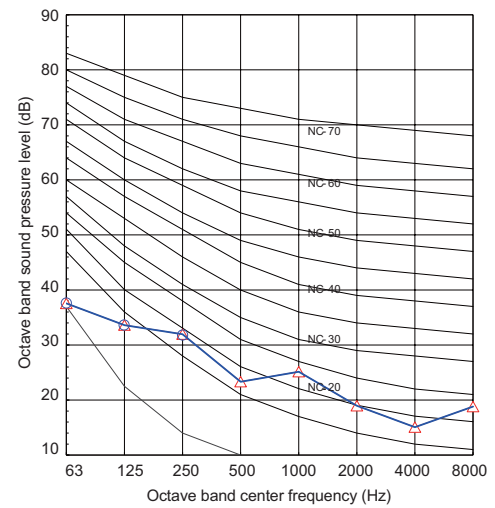


2-7-2. Sound Power

▼ HWT-601HWH(M3,T6)W-E HWT-1101XWH(M3,T6,T9)W-E


- Maximum/Rated/Silent operation

Sound power level (dB(A))	Cooling 40	Heating 40
---------------------------	---------------	---------------

Cooling

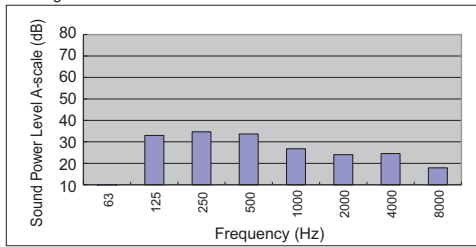

Heating

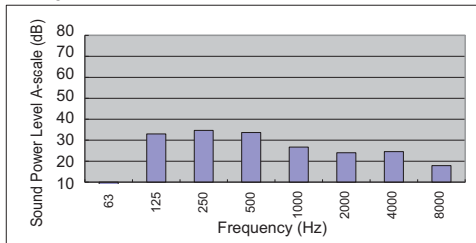


▼ HWT-1401XWH(M3,M6,T6,T9)W-E


- Maximum/Rated/Silent operation

Sound power level (dB(A))	Cooling 45	Heating 45
---------------------------	---------------	---------------

Cooling

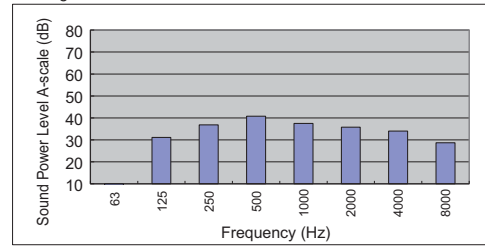


Heating

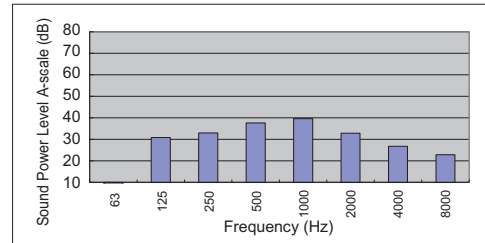

**▼ HWT-602S21S(M)(M3,M6,T6)W-E
HWT-1102S21S(M)(M3,M6,T6,T9)W-E**


Maximum operation (1 ZONE)

Sound power level (dB(A))	Cooling	Heating
	48	48

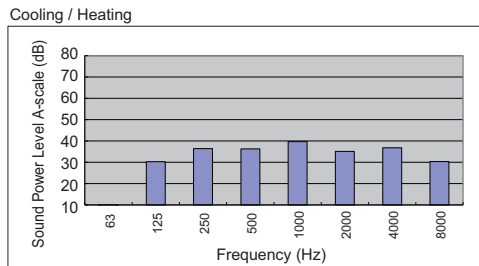

Maximum operation (2 ZONE)


Sound power level (dB(A))	Cooling	Heating
	48	48

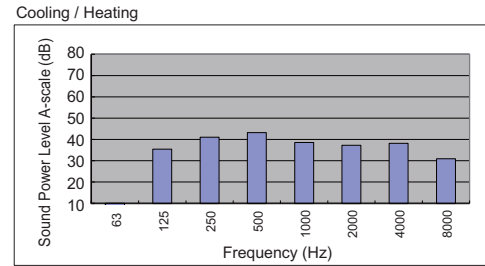

▼ HWT-1402S21S(M)(M3,M6,T6,T9)W-E


Maximum operation (1 ZONE)

Sound power level (dB(A))	Cooling	Heating
	48	48

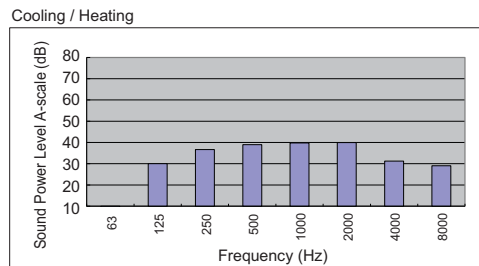

Maximum operation (2 ZONE)

Sound power level (dB(A))	Cooling	Heating
	48	48

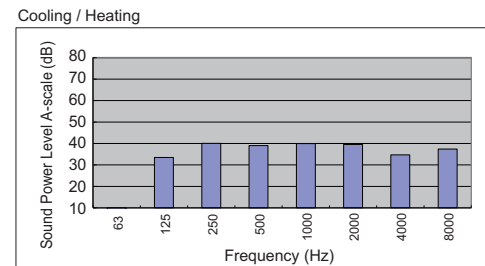

3. OUTDOOR UNIT

3-1. Specifications

3-1-1. Outdoor unit specifications

Wall Mounted Type

Unit name		Hydro unit		HWT-601XWHM3W-E, HWT-601XWHM6W-E, HWT-601XWHT6W-E					
		Outdoor unit		HWT-401HW-E		HWT-601HW-E			
Heating capacity *1 (kW)				4.0		6.0			
Cooling capacity *2 (kW)				4.0		5.0			
Variable range of compressor frequency				10 - 80 Hz		10 - 100 Hz			
Power source				1 phase 50 Hz 220-240 V					
Operation mode				Heating		Cooling			
Electric characteristic *1 *2	Total	Current (A)		4.08		5.38			
		Power (kW)		0.77		1.15			
		Power factor (%)		82		93			
Operating noise sound power level (1)	Hydro unit (dB(A))		40		40		40		
	Outdoor unit (dB(A))		65		62		65		
Coefficient of performance *1 *2				5.20		3.45		4.80	
Hydro unit	Outer dimension	Height (mm)		720					
		Width (mm)		450					
		Depth (mm)		235					
	Net weight (kg)		27						
	Color		White						
	Remote controller Outer dimension *3	Height (mm)		120					
		Width (mm)		120					
		Depth (mm)		16					
	Circulation pump	Motor output (W)		60 (MAX)					
		Rated flow rate (L/min)		11.6		11.5		17.3	
Type		Non-self-suction centrifugal pump							
Heat exchanger		Plate-type heat exchange							
Outdoor unit	Outer dimension	Height (mm)		630					
		Width (mm)		800					
		Depth (mm)		300					
	Net weight (kg)		42						
	Color		Silky shade						
	Compressor	Motor output (W)		1100					
		Type		Twin rotary type with DC-inverter variable speed control					
		Model		DX150A1T-21F					
Fan motor	Standard air capacity (m³/min)		33.6		36.4		33.6		
	Motor output (W)		43						
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)						
	Hydro unit	Liquid		Ø6.4					
		Gas		Ø12.7					
	Outdoor unit	Liquid		Ø6.4					
		Gas		Ø12.7					
	Maximum length (m)		30						
	Maximum chargeless length (m)		20						
	Maximum height difference (m)		±30						
Minimum length (m)		5							
Refrigerant	Refrigerant name		R32						
	Charge amount (kg)		0.9						
Water piping	Pipe diameter		R1						
	Maximum length (m)		None (Need the flow rate 14 L/min or more)						
	Maximum height difference (m)		±7						
	Maximum working water pressure (kPa) *4		430						
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)		5-32 / 5-32 / 5-32						
	Outdoor unit (°C) (Cooling / Heating / Hot water)		10-43 / -20-25 / -20-43						
Operating humidity range	Hydro unit (%)		15-85						
	Outdoor unit (%)		15-100						
Wiring connection	Power wiring		3 wires: including earth wire (Outdoor unit)						
	Connecting line		4 wires: including earth wire						

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.

• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1)Max operation

Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.

Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

Wall Mounted Type

Unit name		Hydro unit		HWT-1101XWHM3W-E, HWT-1101XWHM6W-E, HWT-1101XWHT6W-E, HWT-1101XWHT9W-E				
		Outdoor unit		HWT-801H(R)W-E		HWT-1101H(R)W-E		
Heating capacity *1 (kW)				8.0		11.0		
Cooling capacity *2 (kW)				6.0		8.0		
Variable range of compressor frequency				10 - 90 Hz		10 - 100 Hz		
Power source				1 phase 50 Hz 220-240 V				
Operation mode				Heating	Cooling	Heating	Cooling	
Electric characteristic *1 *2	Total	Current (A)		7.05	8.51	10.60	12.82	
		Power (kW)		1.54	1.88	2.39	2.86	
		Power factor (%)		95	96	98	97	
Operating noise sound power level (1)	Hydro unit (dB(A))		40	40	40	40		
	Outdoor unit (dB(A))		65	63	65	64		
Coefficient of performance *1 *2				5.19	3.20	4.60	2.80	
Hydro unit	Outer dimension	Height (mm)		720				
		Width (mm)		450				
		Depth (mm)		235				
	Net weight (kg)				27			
	Color				White			
	Remote controller Outer dimension *3	Height (mm)		120				
		Width (mm)		120				
		Depth (mm)		16				
	Circulation pump	Motor output (W)		60 (MAX)				
		Rated flow rate (L/min)		23.0	16.7	32.1	22.7	
		Type		Non-self-suction centrifugal pump				
Heat exchanger				Plate-type heat exchange				
Outdoor unit	Outer dimension	Height (mm)		1050				
		Width (mm)		1010				
		Depth (mm)		370				
	Net weight (kg)				75			
	Color				Silky shade			
	Compressor	Motor output (W)		2000				
		Type		Twin rotary type with DC-inverter variable speed control				
		Model		NX220A1FJ-20N				
	Fan motor	Standard air capacity (m ³ /min)		52.4	52.4	58.4	52.4	
		Motor output (W)		60				
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)					
	Hydro unit	Liquid	Ø6.4					
		Gas	Ø15.9					
	Outdoor unit	Liquid	Ø6.4					
		Gas	Ø15.9					
	Maximum length (m)				30			
	Maximum chargeless length (m)				8			
	Maximum height difference (m)				±30			
Minimum length (m)				5				
Refrigerant	Refrigerant name		R32					
	Charge amount (kg)				1.25			
Water piping	Pipe diameter				R1			
	Maximum length (m)				None (Need the flow rate 14 L/min or more)			
	Maximum height difference (m)				±7			
	Maximum working water pressure (kPa) *4				430			
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)				5-32 / 5-32 / 5-32			
	Outdoor unit (°C) (Cooling / Heating / Hot water)				10-43 / -25-25 / -25-43			
Operating humidity range	Hydro unit (%)				15-85			
	Outdoor unit (%)				15-100			
Wiring connection	Power wiring				3 wires: including earth wire (Outdoor unit)			
	Connecting line				4 wires: including earth wire			

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.

• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1)Max operation

Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.

Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

Wall Mounted Type

Unit name	Hydro unit		HWT-1401XWHM3W-E, HWT-1401XWHM6W-E, HWT-1401XWHT6W-E, HWT-1401XWHT9W-E		
	Outdoor unit		HWT-1401H(R)W-E		
Heating capacity *1 (kW)			14.0		
Cooling capacity *2 (kW)			10.0		
Variable range of compressor frequency			10 - 82 Hz		
Power source			1 phase 50 Hz 220-240 V		
Operation mode			Heating	Cooling	
Electric characteristic *1 *2	Total	Current (A)	14.2	18.7	
		Power (kW)	3.04	4.08	
		Power factor (%)	93.0	95.0	
Operating noise sound power level (1)	Hydro unit (dB(A))		45	45	
	Outdoor unit (dB(A))		72	70	
Coefficient of performance *1 *2			4.60	2.45	
Hydro unit	Outer dimension	Height (mm)	720		
		Width (mm)	450		
		Depth (mm)	235		
	Net weight (kg)		28		
	Color		White		
	Remote controller Outer dimension *3	Height (mm)	120		
		Width (mm)	120		
		Depth (mm)	16		
	Circulation pump	Motor output (W)	75 (MAX)		
		Rated flow rate (L/min)	40.5	28.6	
		Type	Non-self-suction centrifugal pump		
	Heat exchanger		Plate-type heat exchange		
Outdoor unit	Outer dimension	Height (mm)	1050		
		Width (mm)	1010		
		Depth (mm)	370		
	Net weight (kg)		88		
	Color		Silky shade		
	Compressor	Motor output (W)	3750		
		Type	Twin rotary type with DC-inverter variable speed control		
		Model	DX380A2TJ-20M		
	Fan motor	Standard air capacity (m ³ /min)	78.7		
		Motor output (W)	100		
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)		
	Hydro unit	Liquid	Ø6.4		
		Gas	Ø15.9		
	Outdoor unit	Liquid	Ø6.4		
		Gas	Ø15.9		
	Maximum length (m)		25		
	Maximum chargeless length (m)		8		
	Maximum height difference (m)		±25		
Minimum length (m)		5			
Refrigerant	Refrigerant name		R32		
	Charge amount (kg)		1.40		
Water piping	Pipe diameter		R1		
	Maximum length (m)		None (Need the flow rate 18 L/min or more)		
	Maximum height difference (m)		±7		
	Maximum working water pressure (kPa) *4		430		
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)		5-32 / 5-32 / 5-32		
	Outdoor unit (°C) (Cooling / Heating / Hot water)		10-43 / -25-25 / -25-43		
Operating humidity range	Hydro unit (%)		15-85		
	Outdoor unit (%)		15-100		
Wiring connection	Power wiring		3 wires: including earth wire (Outdoor unit)		
	Connecting line		4 wires: including earth wire		

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.

• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1)Max operation

Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.

Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

Wall Mounted Type

Unit name		Hydro unit	HWT-1101XWHM3W-E, HWT-1101XWHM6W-E, HWT-1101XWHT8W-E, HWT-1101XWHT9W-E			
		Outdoor unit	HWT-801H8(R)W-E		HWT-1101H8(R)W-E	
Heating capacity *1 (kW)		8.0		11.0		
Cooling capacity *2 (kW)		6.0		8.0		
Variable range of compressor frequency		10 - 53 Hz		10 - 64 Hz		
Power source		3 phase 50 Hz 380-415 V				
Operation mode		Heating	Cooling	Heating	Cooling	
Electric characteristic *1 *2	Total	Current (A)	2.50	3.10	3.63	4.37
		Power (kW)	1.55	1.94	2.30	2.88
		Power factor (%)	93	93	94	98
Operating noise sound power level (1)	Hydro unit (dB(A))	40	44	40	44	
	Outdoor unit (dB(A))	71	66	70	67	
Coefficient of performance *1 *2		5.15	3.04	4.78	2.77	
Hydro unit	Outer dimension	Height (mm)	720			
		Width (mm)	450			
		Depth (mm)	235			
	Net weight (kg)		27			
	Color		White			
	Remote controller Outer dimension *3	Height (mm)	120			
		Width (mm)	120			
		Depth (mm)	16			
	Circulation pump	Motor output (W)	60 (MAX)			
		Rated flow rate (L/min)	23.0	16.7	32.1	22.7
		Type	Non-self-suction centrifugal pump			
Heat exchanger		Plate-type heat exchange				
Outdoor unit	Outer dimension	Height (mm)	1050			
		Width (mm)	1010			
		Depth (mm)	370			
	Net weight (kg)		92			
	Color		Silky shade			
	Compressor	Motor output (W)	3750			
		Type	Twin rotary type with DC-inverter variable speed control			
		Model	RX380A2TJ-20M			
	Fan motor	Standard air capacity (m ³ /min)	58.4	58.4	78.7	78.7
		Motor output (W)	100			
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)			
	Hydro unit	Liquid	Ø6.4			
		Gas	Ø15.9			
	Outdoor unit	Liquid	Ø6.4			
		Gas	Ø15.9			
	Maximum length (m)		30			
	Maximum chargeless length (m)		8			
	Maximum height difference (m)		±30			
Minimum length (m)		5				
Refrigerant	Refrigerant name		R32			
	Charge amount (kg)		1.30			
Water piping	Pipe diameter		R1			
	Maximum length (m)		None (Need the flow rate 14 L/min or more)			
	Maximum height difference (m)		±7			
	Maximum working water pressure (kPa) *4		430			
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)		5-32 / 5-32 / 5-32			
	Outdoor unit (°C) (Cooling / Heating / Hot water)		10-43 / -25-25 / -25-43			
Operating humidity range	Hydro unit (%)		15-85			
	Outdoor unit (%)		15-100			
Wiring connection	Power wiring		3 wires: including earth wire (Outdoor unit)			
	Connecting line		4 wires: including earth wire			

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.
• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1)Max operation

Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.
Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

Wall Mounted Type

Unit name	Hydro unit		HWT-1401XWHM3W-E, HWT-1401XWHM6W-E, HWT-1401XWHT6W-E, HWT-1401XWHT9W-E		
	Outdoor unit		HWT-1401H8(R)W-E		
Heating capacity *1 (kW)			14.0		
Cooling capacity *2 (kW)			10.0		
Variable range of compressor frequency			10 - 82 Hz		
Power source			3 phase 50 Hz 380-415 V		
Operation mode			Heating	Cooling	
Electric characteristic *1 *2	Total	Current (A)	4.6	5.6	
		Power (kW)	3.04	4.08	
		Power factor (%)	93.0	95.0	
Operating noise sound power level (1)	Hydro unit (dB(A))		45	45	
	Outdoor unit (dB(A))		72	70	
Coefficient of performance *1 *2			4.60	2.45	
Hydro unit	Outer dimension	Height (mm)	720		
		Width (mm)	450		
		Depth (mm)	235		
	Net weight (kg)		28		
	Color		White		
	Remote controller Outer dimension *3	Height (mm)	120		
		Width (mm)	120		
		Depth (mm)	16		
	Circulation pump	Motor output (W)	75 (MAX)		
		Rated flow rate (L/min)	40.5	28.6	
		Type	Non-self-suction centrifugal pump		
	Heat exchanger		Plate-type heat exchange		
Outdoor unit	Outer dimension	Height (mm)	1050		
		Width (mm)	1010		
		Depth (mm)	370		
	Net weight (kg)		92		
	Color		Silky shade		
	Compressor	Motor output (W)	3750		
		Type	Twin rotary type with DC-inverter variable speed control		
		Model	RX380A2TJ-20M		
	Fan motor	Standard air capacity (m ³ /min)	78.7		
		Motor output (W)	100		
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)		
	Hydro unit	Liquid	Ø6.4		
		Gas	Ø15.9		
	Outdoor unit	Liquid	Ø6.4		
		Gas	Ø15.9		
	Maximum length (m)		25		
	Maximum chargeless length (m)		8		
	Maximum height difference (m)		±25		
Minimum length (m)		5			
Refrigerant	Refrigerant name		R32		
	Charge amount (kg)		1.40		
Water piping	Pipe diameter		R1		
	Maximum length (m)		None (Need the flow rate 18 L/min or more)		
	Maximum height difference (m)		±7		
	Maximum working water pressure (kPa) *4		430		
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)		5-32 / 5-32 / 5-32		
	Outdoor unit (°C) (Cooling / Heating / Hot water)		10-43 / -25-25 / -25-43		
Operating humidity range	Hydro unit (%)		15-85		
	Outdoor unit (%)		15-100		
Wiring connection	Power wiring		3 wires: including earth wire (Outdoor unit)		
	Connecting line		4 wires: including earth wire		

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.

• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1)Max operation

Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.

Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

All In One Type

Unit name	Hydro unit	HWT-602S21SM3W-E, HWT-602S21SM6W-E HWT-602S21ST6W-E, HWT-602S21MM3W-E HWT-602S21MM6W-E, HWT-602S21MT6W-E				
	Outdoor unit	HWT-401HW-E		HWT-601HW-E		
Heating capacity *1 (kW)			4.0		6.0	
Cooling capacity *2 (kW)			4.0		5.0	
Variable range of compressor frequency			10 - 80 Hz		10 - 100 Hz	
Power source	1 phase 50 Hz 220-240 V					
Operation mode			Heating	Cooling		
Electric characteristic *1 *2	Total	Current (A)	4.08	5.38	5.78	
		Power (kW)	0.77	1.15	1.25	
		Power factor (%)	82	93	94	
Operating noise sound power level (1)	Hydro unit (dB(A))	48				
	Outdoor unit (dB(A))	65				
Coefficient of performance *1 *2			5.20	3.45	4.80	
Hydro unit	Outer dimension	Height (mm)	1700			
		Width (mm)	595			
		Depth (mm)	670			
	Net weight (kg)	116 (SM/ST), 122 (MM/MT)				
	Color	White				
	Remote controller Outer dimension *3	Height (mm)	120			
		Width (mm)	120			
		Depth (mm)	16			
	Circulation pump	Motor output (W)	MAX 75 W (S21S), MAX 75 W × 2 (S21M)			
		Rated flow rate (L/min)	11.6	11.5	17.3	14.3
	Heat exchanger	Non-self-suction centrifugal pump Plate-type heat exchange				
Outdoor unit	Tank	Water volume (L)	210			
		Maximum water temperature (°C)	65			
		Maximum water Pressure (bar)	10			
	Outer dimension	Height (mm)	630			
		Width (mm)	800			
		Depth (mm)	300			
	Net weight (kg)	42				
	Color	Silky shade				
	Compressor	Motor output (W)	1100			
		Type	Twin rotary type with DC-inverter variable speed control			
		Model	DX150A1T-21F			
Fan motor	Standard air capacity (m³/min)	33.6	36.4	33.6	36.4	
	Motor output (W)	43				
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)			
	Hydro unit	Liquid	Ø6.4			
		Gas	Ø12.7			
	Outdoor unit	Liquid	Ø6.4			
		Gas	Ø12.7			
	Maximum length (m)	30				
	Maximum chargeless length (m)	20				
	Maximum height difference (m)	±30				
Minimum length (m)	5					
Refrigerant	Refrigerant name		R32			
	Charge amount (kg)		0.9			
Water piping	Pipe diameter		R3/4"			
	Maximum length (m)		None (Need the flow rate 10 L/min or more)			
	Maximum height difference (m)		±7			
	Maximum working water pressure (kPa) *4		250			
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)		5-32 / 5-32 / 5-32			
	Outdoor unit (°C) (Cooling / Heating / Hot water)		10-43 / -20-25 / -20-43			
Operating humidity range	Hydro unit (%)		15-85			
	Outdoor unit (%)		15-100			
Wiring connection	Power wiring		3 wires: including earth wire (Outdoor unit)			
	Connecting line		4 wires: including earth wire			

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.

• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1). Max operation

Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.

Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

All In One Type

Unit name	Hydro unit		HWT-1102S21SM3W-E, HWT-1102S21SM6W-E HWT-1102S21ST6W-E, HWT-1102S21ST9W-E HWT-1102S21MM3W-E, HWT-1102S21MM6W-E HWT-1102S21MT6W-E, HWT-1102S21MT9W-E				
	Outdoor unit		HWT-801H(R)W-E		HWT-1101H(R)W-E		
Heating capacity *1 (kW)			8.0		11.0		
Cooling capacity *2 (kW)			6.0		8.0		
Variable range of compressor frequency			10 - 90 Hz		10 - 100 Hz		
Power source			1 phase 50 Hz 220-240 V				
Operation mode			Heating		Cooling		
Electric characteristic *1 *2	Total	Current (A)	7.05		8.51		
		Power (kW)	1.54		1.88		
		Power factor (%)	95		96		
Operating noise sound power level (1)	Hydro unit (dB(A))		48		48		
	Outdoor unit (dB(A))		65		64		
Coefficient of performance *1 *2			5.19		3.20		
Hydro unit	Outer dimension	Height (mm)	1700				
		Width (mm)	595				
		Depth (mm)	670				
	Net weight (kg)		116 (SM/ST), 122 (MM/MT6), 123 (MT9)				
	Color		White				
	Remote controller Outer dimension *3	Height (mm)	120				
		Width (mm)	120				
		Depth (mm)	16				
	Circulation pump	Motor output (W)		MAX 75 W (S21S), MAX 75 W × 2 (S21M)			
		Rated flow rate (L/min)		23.0		16.7	
		Type		Non-self-suction centrifugal pump			
Heat exchanger		Plate-type heat exchange					
Outdoor unit	Tank	Water volume (L)	210				
		Maximum water temperature (°C)	65				
		Maximum water Pressure (bar)	10				
	Outer dimension	Height (mm)	1050				
		Width (mm)	1010				
		Depth (mm)	370				
	Net weight (kg)		75				
	Color		Silky shade				
	Compressor	Motor output (W)		2000			
		Type		Twin rotary type with DC-inverter variable speed control			
		Model		NX220A1FJ-20N			
Fan motor	Standard air capacity (m³/min)		52.4		52.4		
	Motor output (W)		60				
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)				
	Hydro unit	Liquid	Ø6.4				
		Gas	Ø15.9				
	Outdoor unit	Liquid	Ø6.4				
		Gas	Ø15.9				
	Maximum length (m)		30				
	Maximum chargeless length (m)		8				
	Maximum height difference (m)		±30				
Minimum length (m)		5					
Refrigerant	Refrigerant name		R32				
	Charge amount (kg)		1.25				
Water piping	Pipe diameter		R3/4"				
	Maximum length (m)		None (Need the flow rate 14 L/min or more)				
	Maximum height difference (m)		±7				
	Maximum working water pressure (kPa) *4		250				
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)		5-32 / 5-32 / 5-32				
	Outdoor unit (°C) (Cooling / Heating / Hot water)		10-43 / -25-25 / -25-43				
Operating humidity range	Hydro unit (%)		15-85				
	Outdoor unit (%)		15-100				
Wiring connection	Power wiring		3 wires: including earth wire (Outdoor unit)				
	Connecting line		4 wires: including earth wire				

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.

• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1). Max operation

Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.

Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

All In One Type

Unit name	Hydro unit		HWT-1402S21SM3W-E, HWT-1402S21SM6W-E HWT-1402S21ST6W-E, HWT-1402S21ST9W-E HWT-1402S21MM3W-E, HWT-1402S21MM6W-E HWT-1402S21MT6W-E, HWT-1402S21MT9W-E		
	Outdoor unit		HWT-1401H(R)W-E		
Heating capacity *1 (kW)			14.0		
Cooling capacity *2 (kW)			10.0		
Variable range of compressor frequency			10 - 82 Hz		
Power source			1 phase 50 Hz 220-240 V		
Operation mode			Heating	Cooling	
Electric characteristic *1 *2	Total	Current (A)	14.2	18.7	
		Power (kW)	3.04	4.08	
		Power factor (%)	93.0	95.0	
Operating noise sound power level (1)	Hydro unit (dB(A))		48	48	
	Outdoor unit (dB(A))		72	70	
Coefficient of performance *1 *2			4.60	2.45	
Hydro unit	Outer dimension	Height (mm)	1700		
		Width (mm)	595		
		Depth (mm)	670		
	Net weight (kg)		117 (SM/ST), 123 (MM/MT6), 124 (MT9)		
	Color		White		
	Remote controller Outer dimension *3	Height (mm)	120		
		Width (mm)	120		
		Depth (mm)	16		
	Circulation pump	Motor output (W)	MAX 130 W (S21S), MAX 130 W, MAX 75 W (S21M)		
		Rated flow rate (L/min)	40.5	28.6	
		Type	Non-self-suction centrifugal pump		
Heat exchanger		Plate-type heat exchange			
Outdoor unit	Tank	Water volume (L)	210		
		Maximum water temperature (°C)	65		
		Maximum water Pressure (bar)	10		
	Outer dimension	Height (mm)	1050		
		Width (mm)	1010		
		Depth (mm)	370		
	Net weight (kg)		88		
	Color		Silky shade		
	Compressor	Motor output (W)	3750		
		Type	Twin rotary type with DC-inverter variable speed control		
		Model	DX380A2TJ-20M		
Fan motor	Standard air capacity (m³/min)	78.7	78.7		
	Motor output (W)	100			
Refrigerant piping	Connection method		Flare connection (Conformity with ISO 14903 in Hydro side)		
	Hydro unit	Liquid	Ø6.4		
		Gas	Ø15.9		
	Outdoor unit	Liquid	Ø6.4		
		Gas	Ø15.9		
	Maximum length (m)		25		
	Maximum chargeless length (m)		8		
	Maximum height difference (m)		±25		
Minimum length (m)		5			
Refrigerant	Refrigerant name		R32		
	Charge amount (kg)		1.40		
Water piping	Pipe diameter		R3/4"		
	Maximum length (m)		None (Need the flow rate 18 L/min or more)		
	Maximum height difference (m)		±7		
	Maximum working water pressure (kPa) *4		250		
Operating temperature range	Hydro unit (°C) *5 (Cooling / Heating / Hot water)		5-32 / 5-32 / 5-32		
	Outdoor unit (°C) (Cooling / Heating / Hot water)		10-43 / -25-25 / -25-43		
Operating humidity range	Hydro unit (%)		15-85		
	Outdoor unit (%)		15-100		
Wiring connection	Power wiring		3 wires: including earth wire (Outdoor unit)		
	Connecting line		4 wires: including earth wire		

*1 Heating performance measurement conditions: outside air temperature 7°C, water supply temperature 30°C, outlet water temperature 35°C, refrigerant piping length 7.5 m (no height difference).

*2 Cooling performance measurement conditions: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C, refrigerant piping length 7.5 m (no height difference).

*3 • The remote controller should be shipped with the hydro unit.

• Use two 1.5-meter wires to connect the hydro unit with the remote controller.

*4 Check the water piping for leakage under the maximum operating pressure.

*5 Do not leave the hydro unit at 5°C or below.

(1). Max operation


Heating: outside air temperature 7°C, water supply temperature 47°C, outlet water temperature 55°C.

Cooling: outside air temperature 35°C, water supply temperature 12°C, outlet water temperature 7°C.

3-2. Dimension

HWT-401HW-E, HWT-601HW-E





Unit: mm

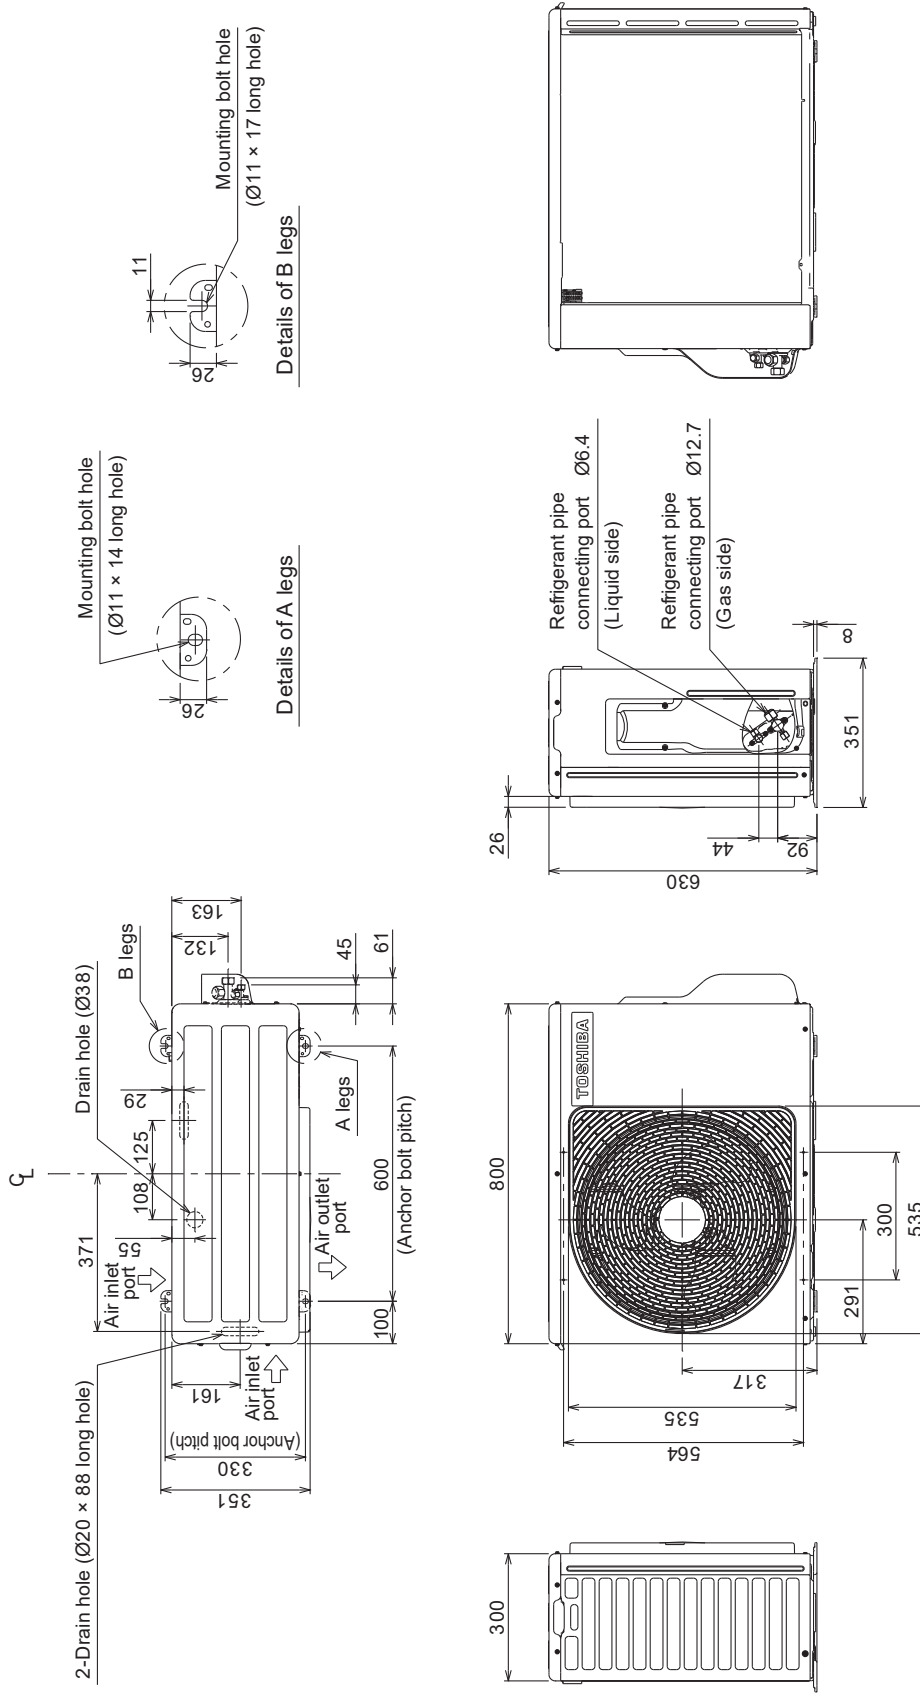

HWT-801HW-E, HWT-1101HW-E, HWT-1401HW-E, HWT-801HRW-E, HWT-1101HRW-E
 HWT-1401HRW-E, HWT-801H8W-E, HWT-1101H8W-E, HWT-1401H8W-E
 HWT-801H8RW-E, HWT-1101H8RW-E, HWT-1401H8RW-E


Unit: mm

Name	Note
① Refrigerant pipe hole Hydro Unit / Outdoor Unit connecting wire inlet hole	—
② Power supply inlet hole	Ø38 Knockout hole

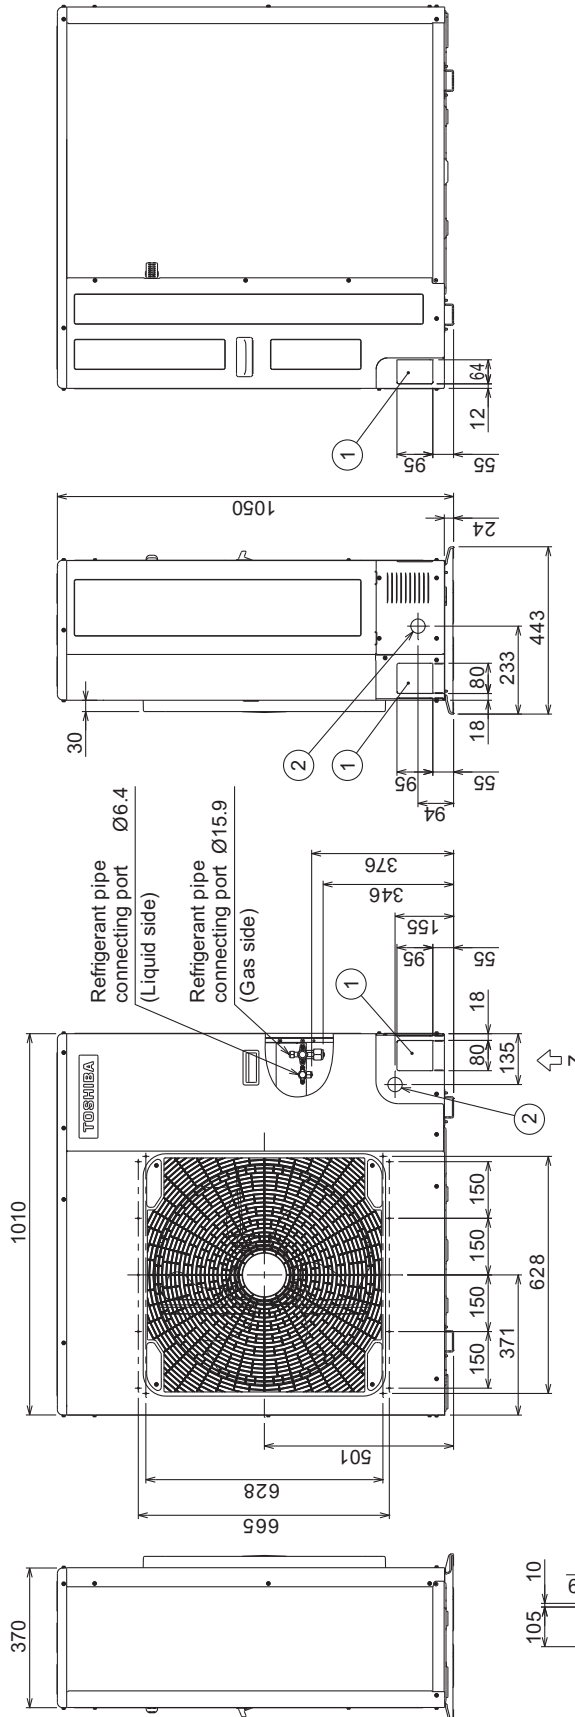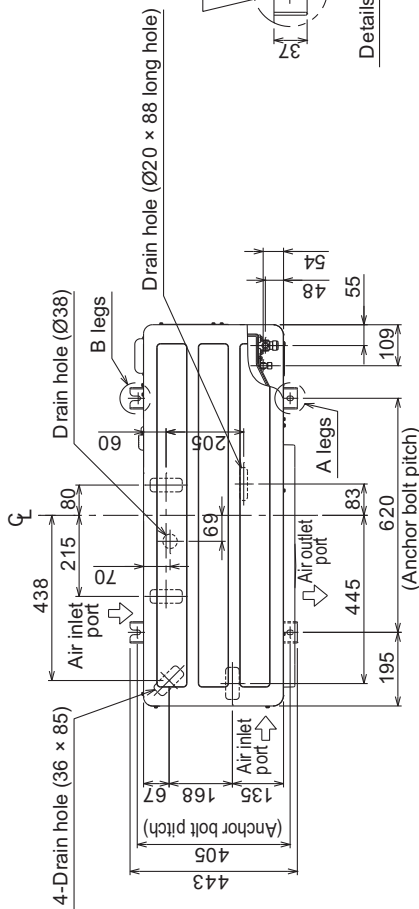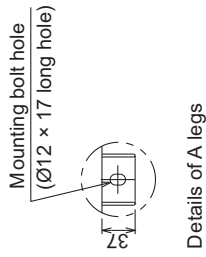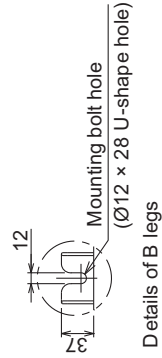


3-3. Piping Diagram

Hydro unit - Wall Mounted Type

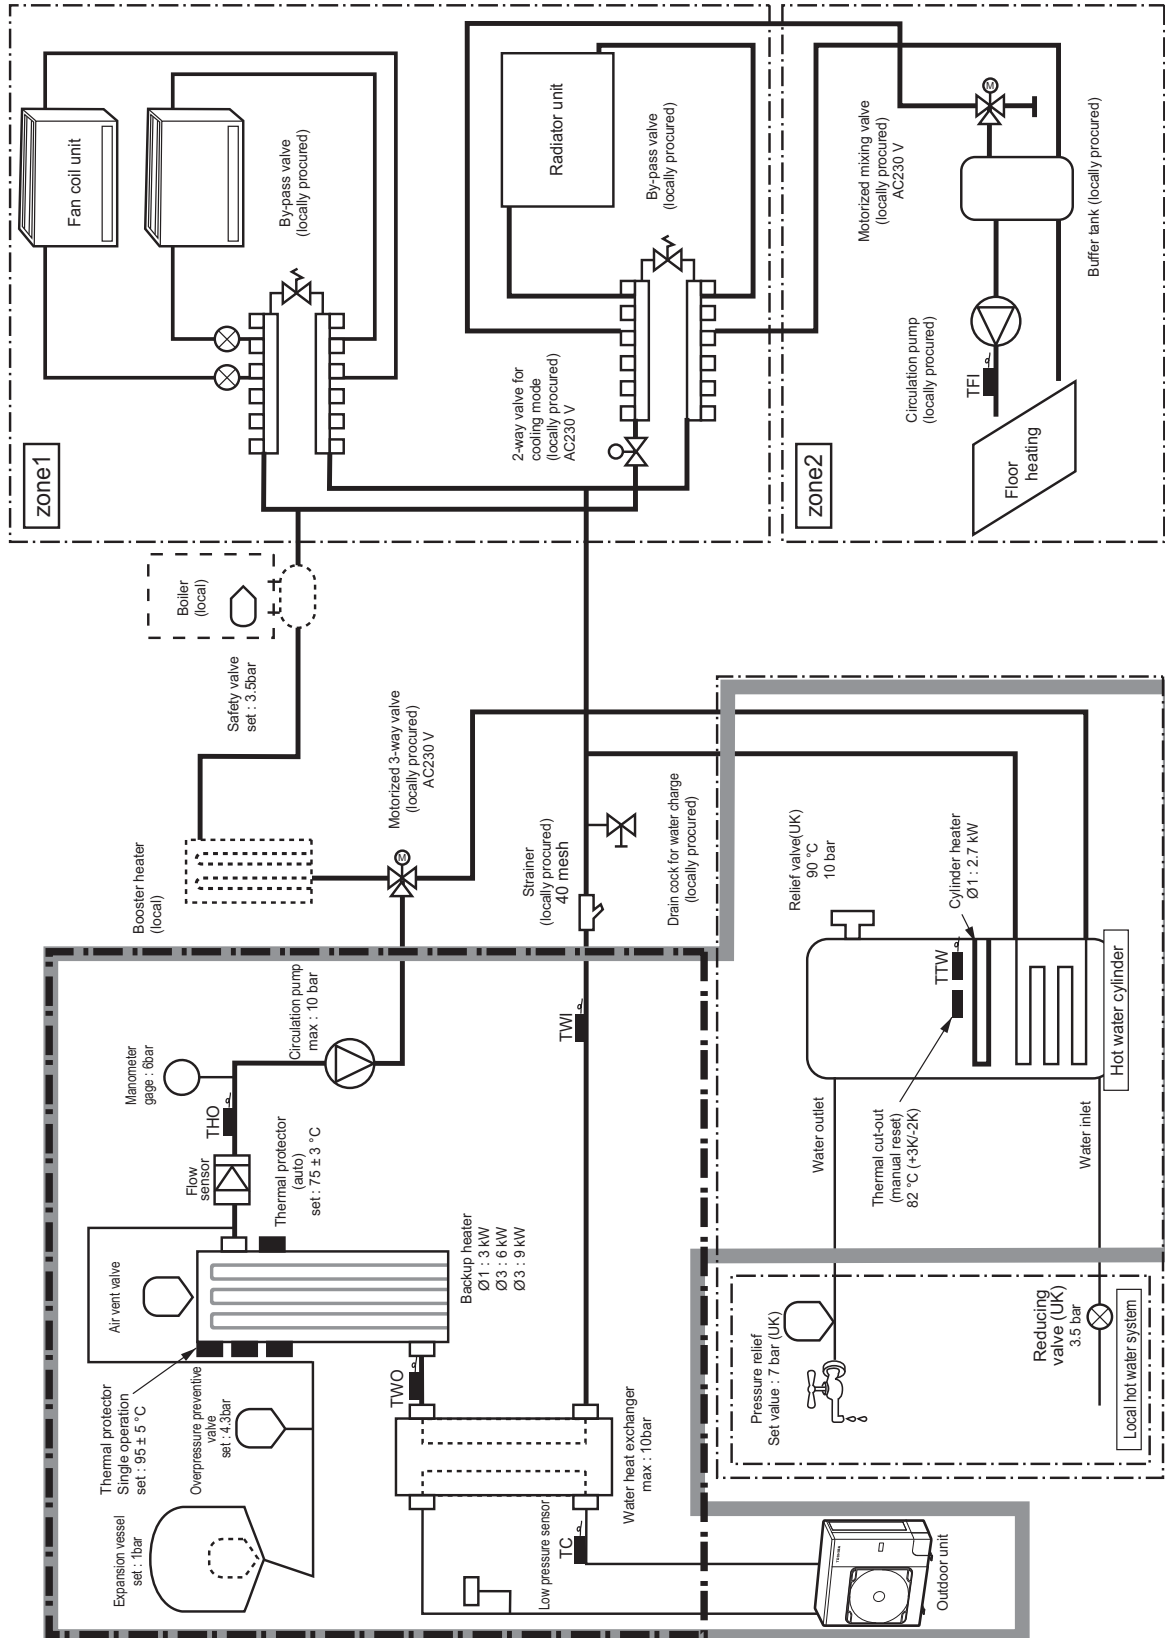

Hydro unit - All In One Type


▼ Water system diagram

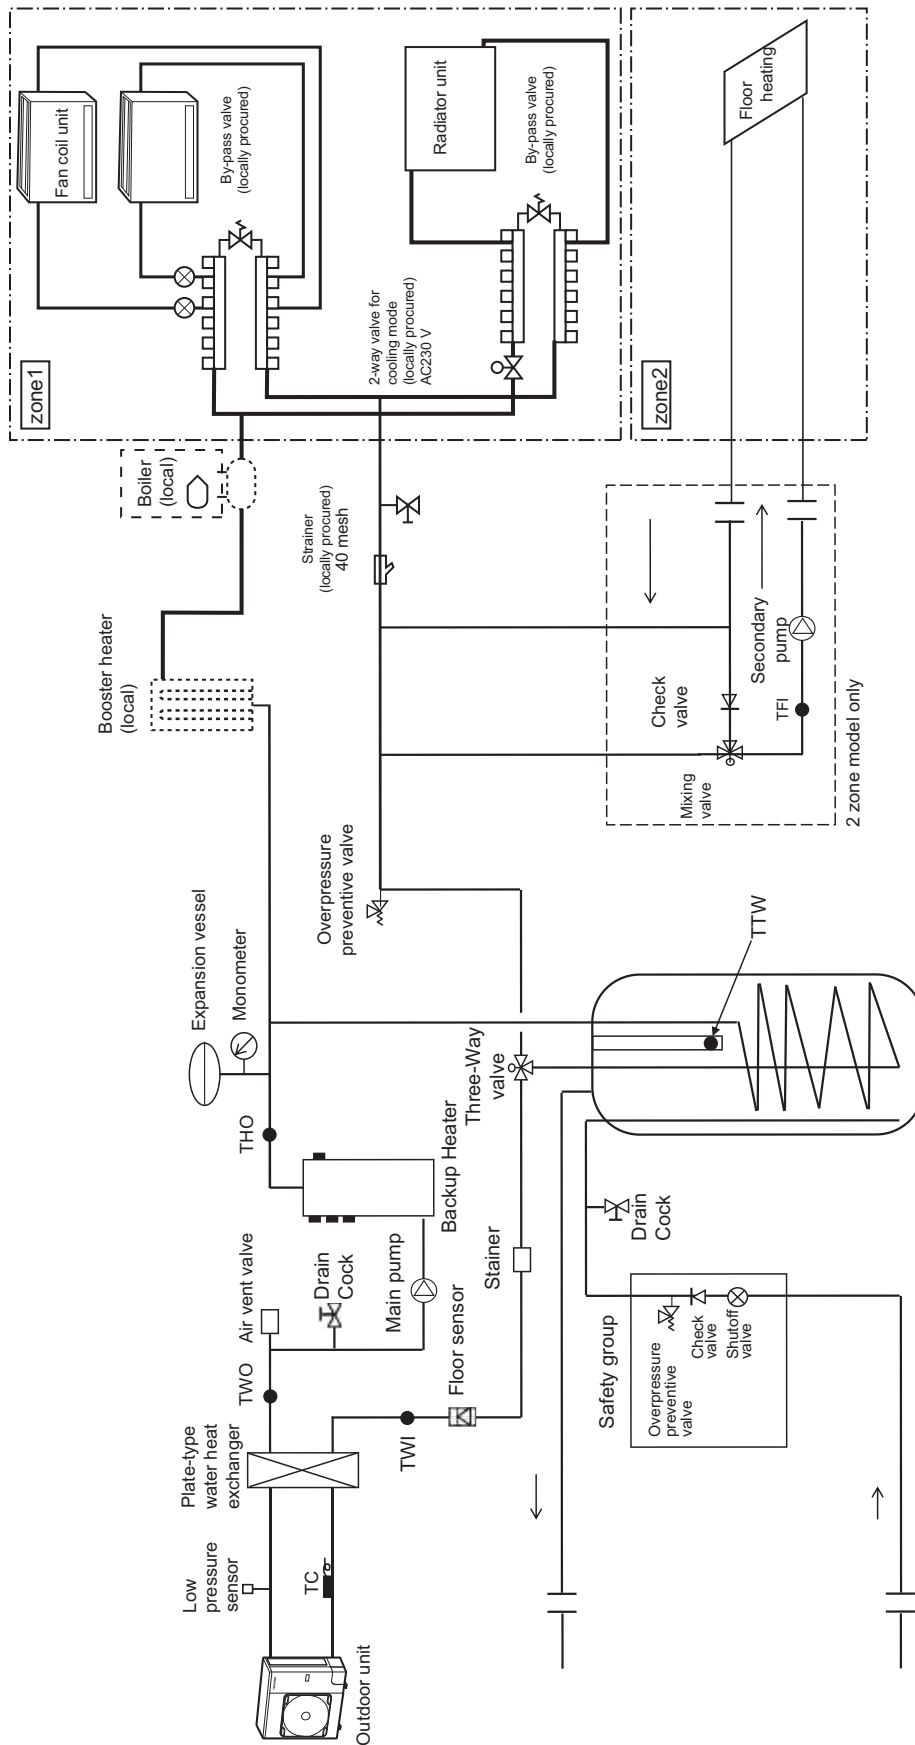

3-4. Wiring Diagram

3-4-1. Outdoor Unit (Single phase type)

HWT-401HW-E, HWT-601HW-E

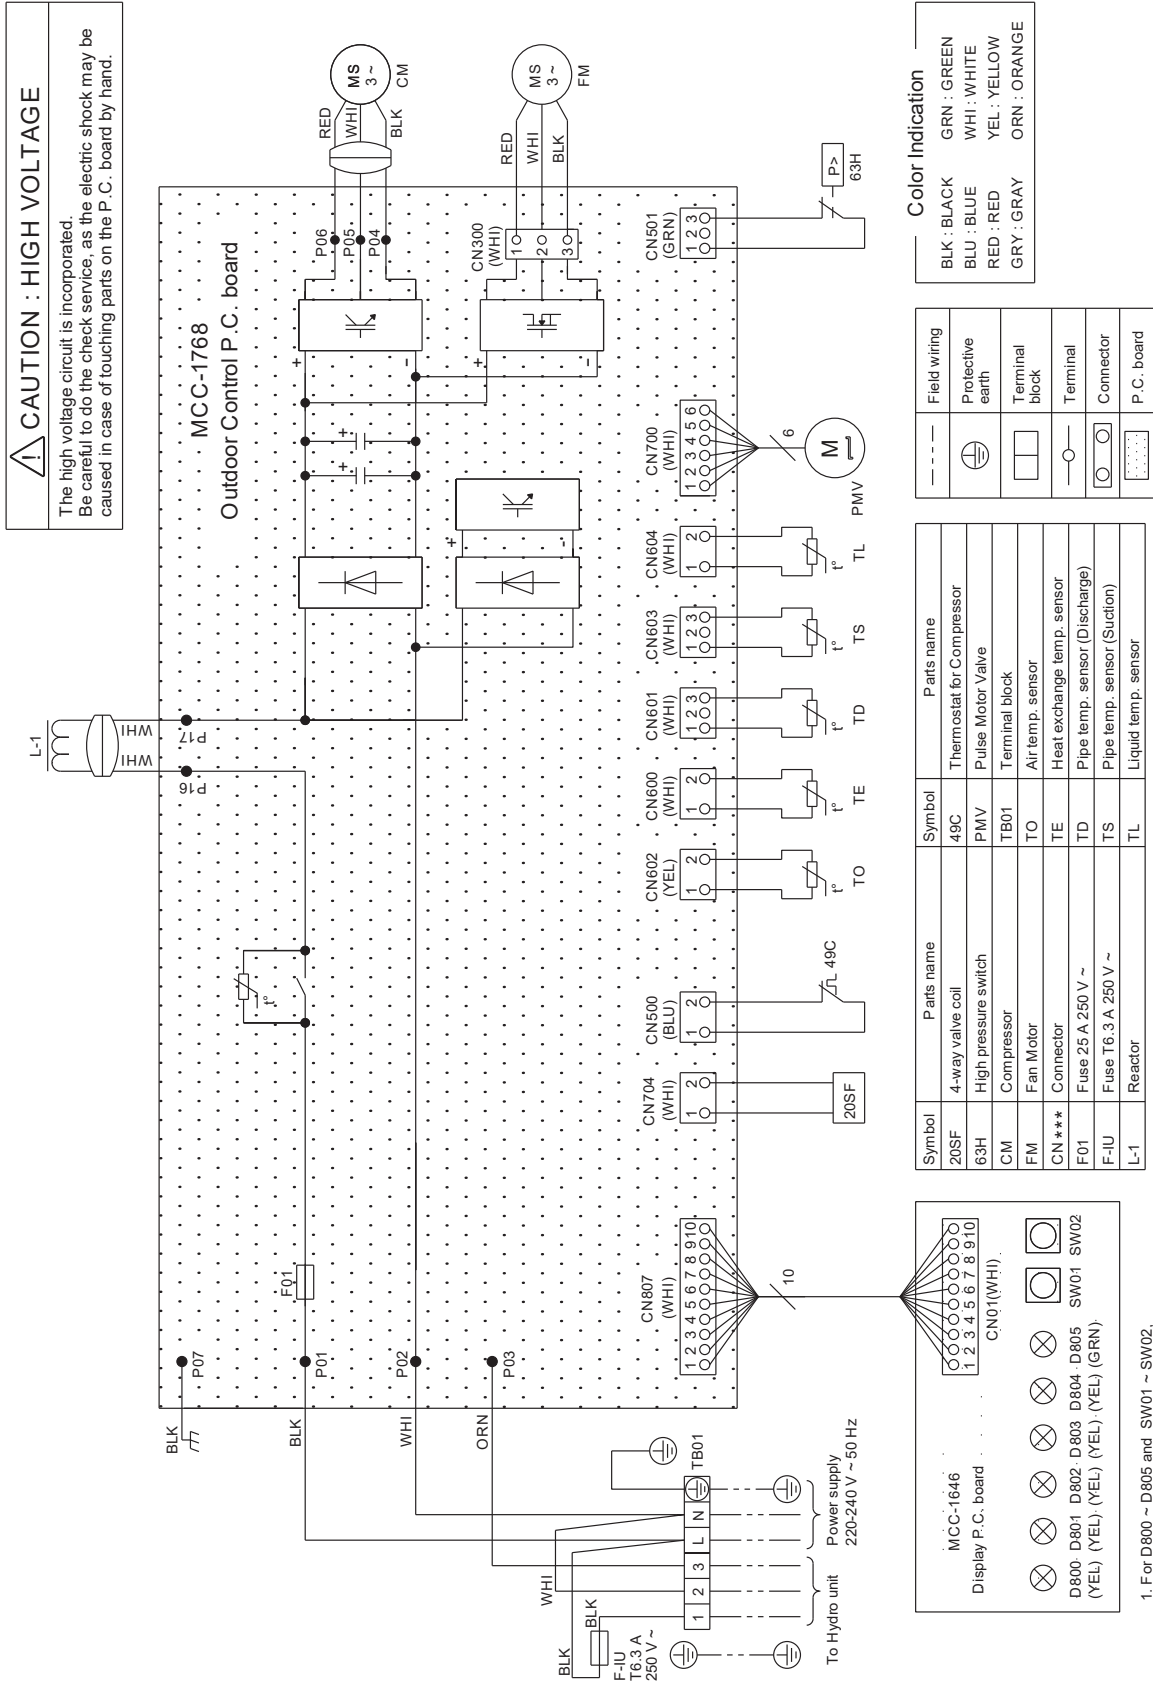

1. For D800 ~ D805 and SW01 ~ SW02, refer to the installation manual.


**HWT-801HW-E, HWT-801HRW-E
HWT-1101HW-E, HWT-1101HRW-E**

⚠ CAUTION : HIGH VOLTAGE
The high voltage circuit is incorporated. Be careful to do the check service, as the electric shock may be caused in case of touching parts on the P.C. board by hand.


Symbol	Part name
CM	Compressor
FM01	Fan motor
F01	Fuse 25 A 250 V ~
F03	Fuse 10 A 250 V ~
PMV1	Pulse motor valve 1
PMV2	Pulse motor valve 2
TB1	Terminal (Power supply)
TB2	Terminal (To hydro unit)
TD	Pipe temperature sensor (Discharge)
TE	Heat exchanger sensor 1
TL	Heat exchanger sensor 2
TO	Outside temperature sensor
TS	Pipe temperature sensor (Suction)
PD	High-pressure sensor
SV2	2-way valve coil
20SF	4-way valve coil
49C	Compressor case thermostat
63H	High-pressure switch

Color Indication
BLK : BLACK
BLU : BLUE
RED : RED
YEL : YELLOW
WHI : WHITE
GRY : GRAY
GRN : GREEN

---	Field wiring
⊕	Protective earth
□	Terminal block
○	Terminal
○	Connector
⋮	P.C. board

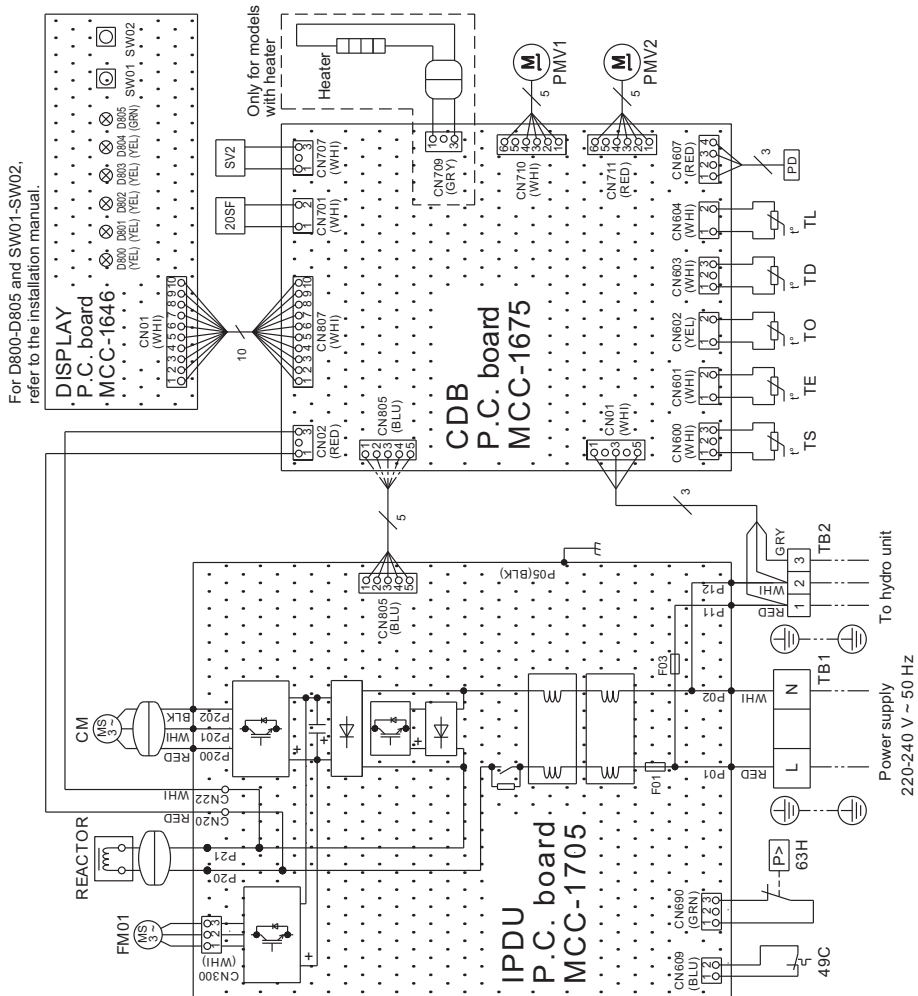

HWT-1401HW-E, HWT-1401HRW-E

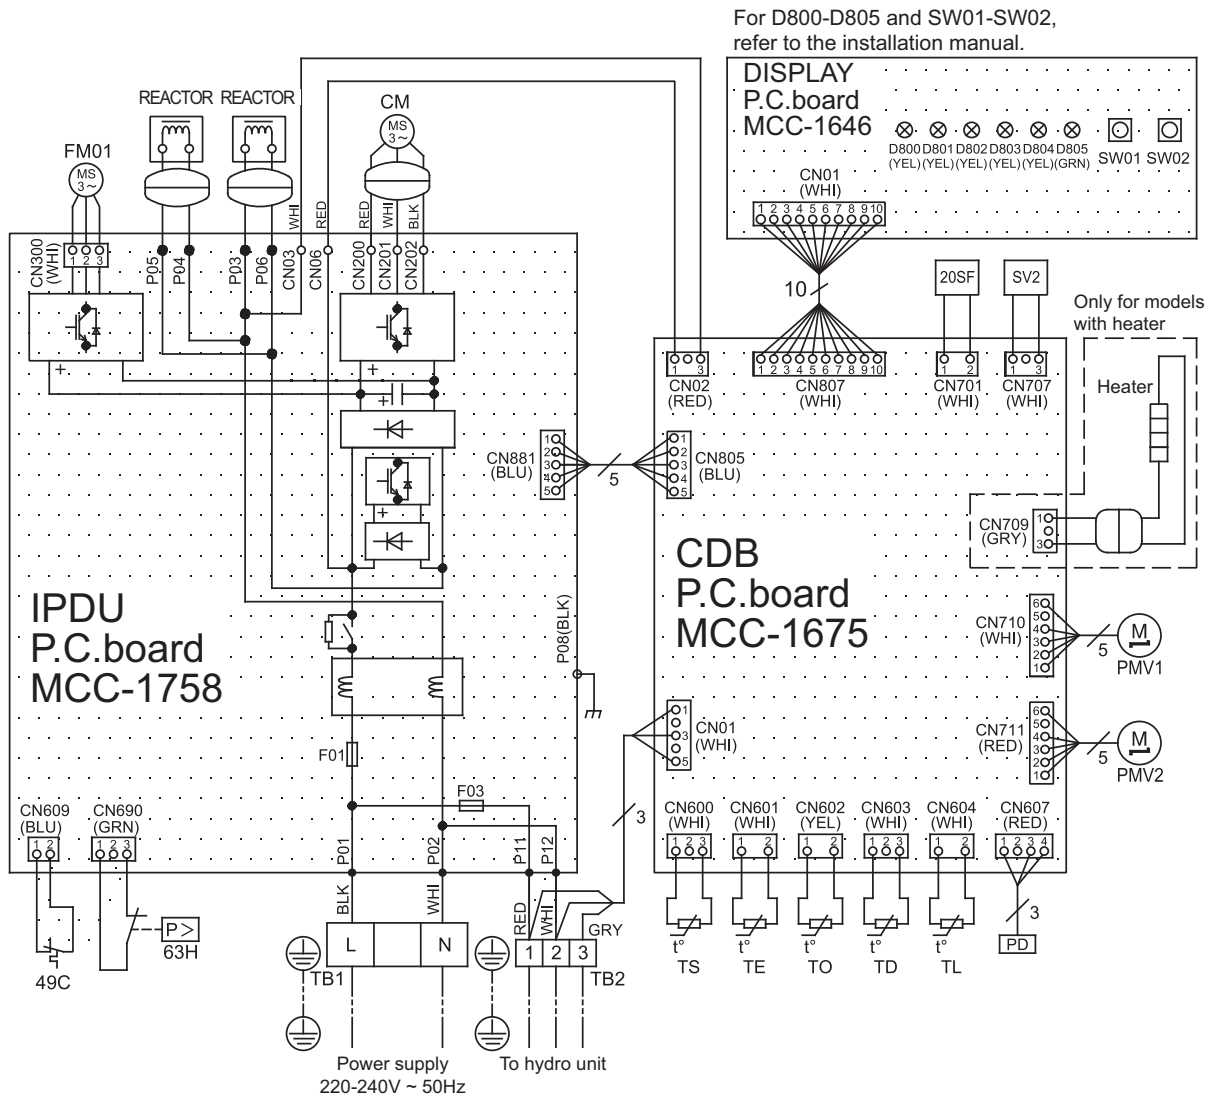

Symbol	Part name
CM	Compressor
FM01	Fan motor
F01	Fuse 25A 250V ~
F03	Fuse 10A 250V~
PMV1	Pulse motor valve 1
PMV2	Pulse motor valve 2
TB1	Terminal (Power supply)
TB2	Terminal (To hydro unit)
TD	Pipe temperature sensor(Discharge)
TE	Heat exchanger sensor 1
TL	Heat exchanger sensor 2
TO	Outside temperature sensor
TS	Pipe temperature sensor(Suction)
PD	High-pressure sensor
SV2	2-way valve coil
20SF	4-way valve coil
49C	Compressor case thermostat
63H	High-pressure switch

Color Indication


- BLK : BLACK
- BLU : BLUE
- RED : RED
- YEL : YELLOW
- WHI : WHITE
- GRY : GRAY
- BRW : BROWN

	Field wiring
	Protective earth
	Terminal block
	Terminal
	Connector
	P.C. board

⚠ CAUTION : HIGH VOLTAGE


The high voltage circuit is incorporated. Be careful to do the check service, as the electric shock may be caused in case of touching parts on the P.C. board by hand.

**HWT-801H8W-E, HWT-1101H8W-E, HWT-1401H8W-E
HWT-801H8RW-E, HWT-1101H8RW-E, HWT-1401H8RW-E**

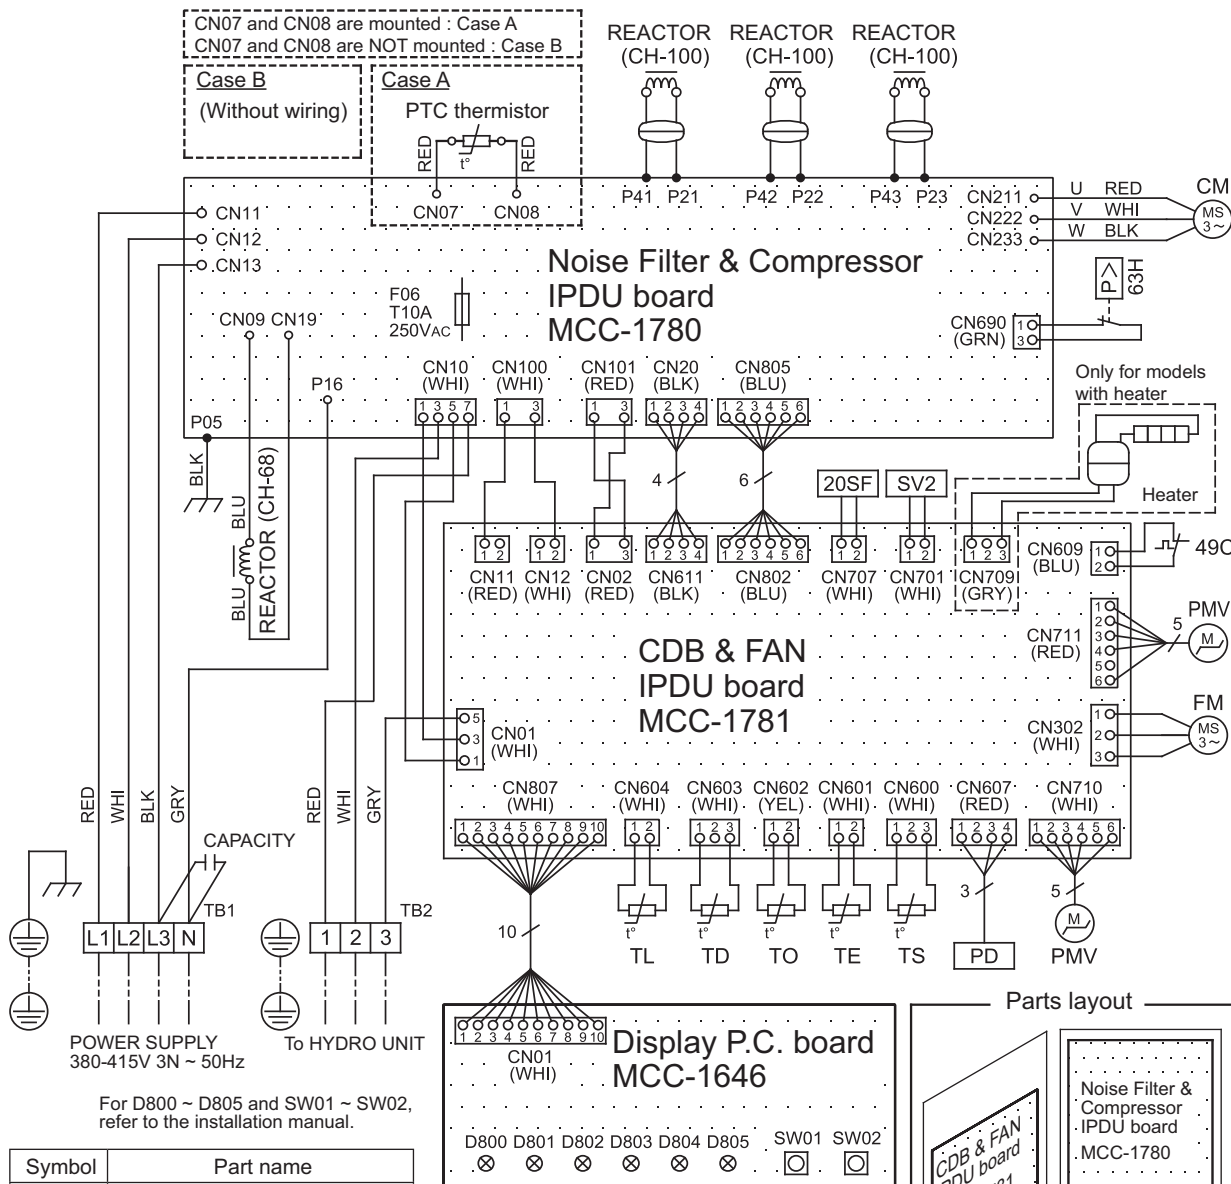


For D800 ~ D805 and SW01 ~ SW02, refer to the installation manual.

Symbol	Part name
CM	Compressor
FM	Fan motor
F06	Fuse 10A 250V AC
PD	High-pressure sensor
PMV	Pulse motor valve
SV2	2-way valve coil
TB1	Terminal (Power supply)
TB2	Terminal (To hydro unit)
TD	Pipe temperature sensor(Discharge)
TE	Heat exchanger sensor 1
TL	Heat exchanger sensor 2
TO	Outside temperature sensor
TS	Pipe temperature sensor(Suction)
20SF	4-way valve coil
49C	Compressor case thermostat
63H	High-pressure switch

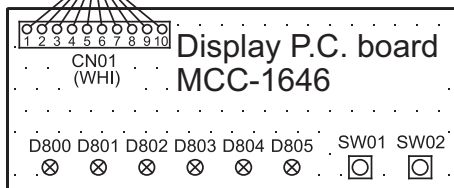

Color Indication	
BLK	: BLACK
BLU	: BLUE
RED	: RED
YEL	: YELLOW
WHI	: WHITE
GRY	: GRAY
BRW	: BROWN

---	Field wiring
⊕	Protective earth
□	Terminal block
○	Terminal
○ ○	Connector
⋯	P.C. board

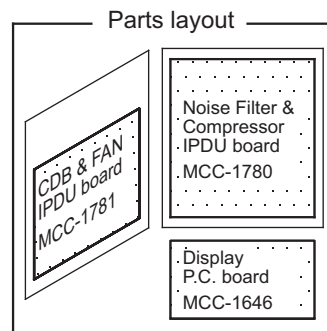


The 4-way valve coil will be energized only during the switching process.

⚠ CAUTION : HIGH VOLTAGE

The high voltage circuit is incorporated. Be careful to do the check service, as the electric shock may be caused in case of touching parts on the P.C. board by hand.


3-4-2. Power line

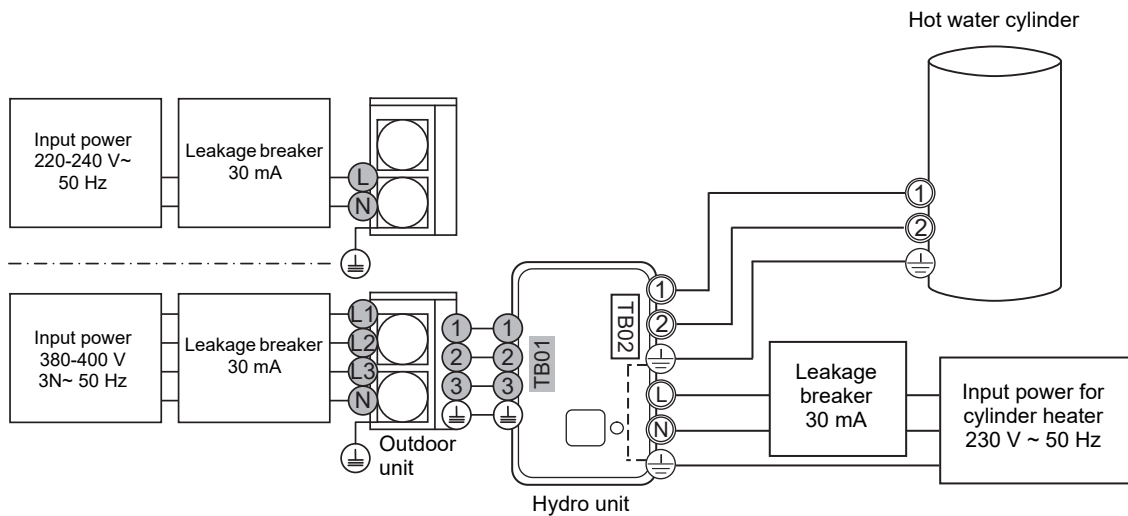

3-4-3. Wiring between Hydro Unit and Outdoor Unit

The dashed lines show on-site wiring.

Connect the system interconnection wires to the identical terminal numbers on the terminal block of each unit. Incorrect connection may cause a failure.

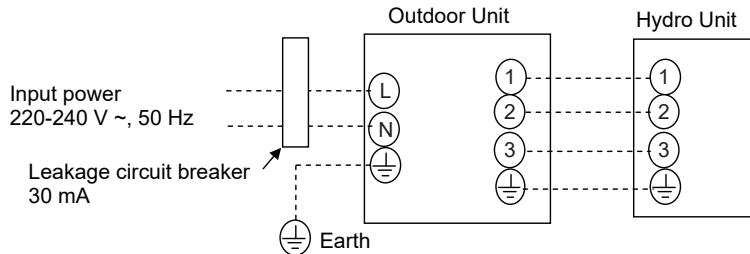

For the Air to Water Heat Pump, connect a power wire with the following specifications.

Model HWT-	401HW-E	601HW-E	801H(R)W-E	1101H(R)W-E	1401H(R)W-E
Power supply	1 phase 50 Hz 220-240 V				
Maximum running current	14.6 A		20.3 A		28.8 A
Recommended field fuse	16 A		25 A		32 A
Power supply wire*	2 × 2.5 mm ² or more (H07 RN-F or 60245 IEC 66)				2 × 4 mm ² or more (H07 RN-F or 60245 IEC 66)
Outdoor earth wire	1 × 2.5 mm ² or more				1 × 4 mm ² or more
Hydro / Outdoor connecting wires*	4 × 1.5 mm ² or more (H07 RN-F or 60245 IEC 66)				


* Number of wire × wire size


Model HWT-	801H8(R)W-E	1101H8(R)W-E	1401H8(R)W-E
Power supply	380-415 V 3N~ 50 Hz		
Maximum running current	13.0 A		
Recommended field fuse	16 A		
Power supply wire*	2 × 2.5 mm ² or more (H07 RN-F or 60245 IEC 66)		
Outdoor earth wire	1 × 2.5 mm ² or more		
Hydro / Outdoor connecting wires*	4 × 1.5 mm ² or more (H07 RN-F or 60245 IEC 66)		

* Number of wire × wire size

3-5. Operation Range

Item	Operation flow and applicable data, etc.
<p>Operation Mode and Control Method</p>	<p>1) Heat a pump operation range of hot water supply, heating and cooling The heat pump operation range of hot water supply, heating and cooling is shown on the figures below.</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;">Single phase 401, 601</div> <p style="text-align: center;">Heat pump operation range of hot water supply and heating. * With the exception of TO 25°C or higher for heating.</p> <p style="text-align: center;">Heat pump operation range of hot water supply and heating Freeze determination is executed only once.</p> <p style="text-align: right;">Heater operation</p> <p style="text-align: center;">Water temperature at inlet (TWI)</p>

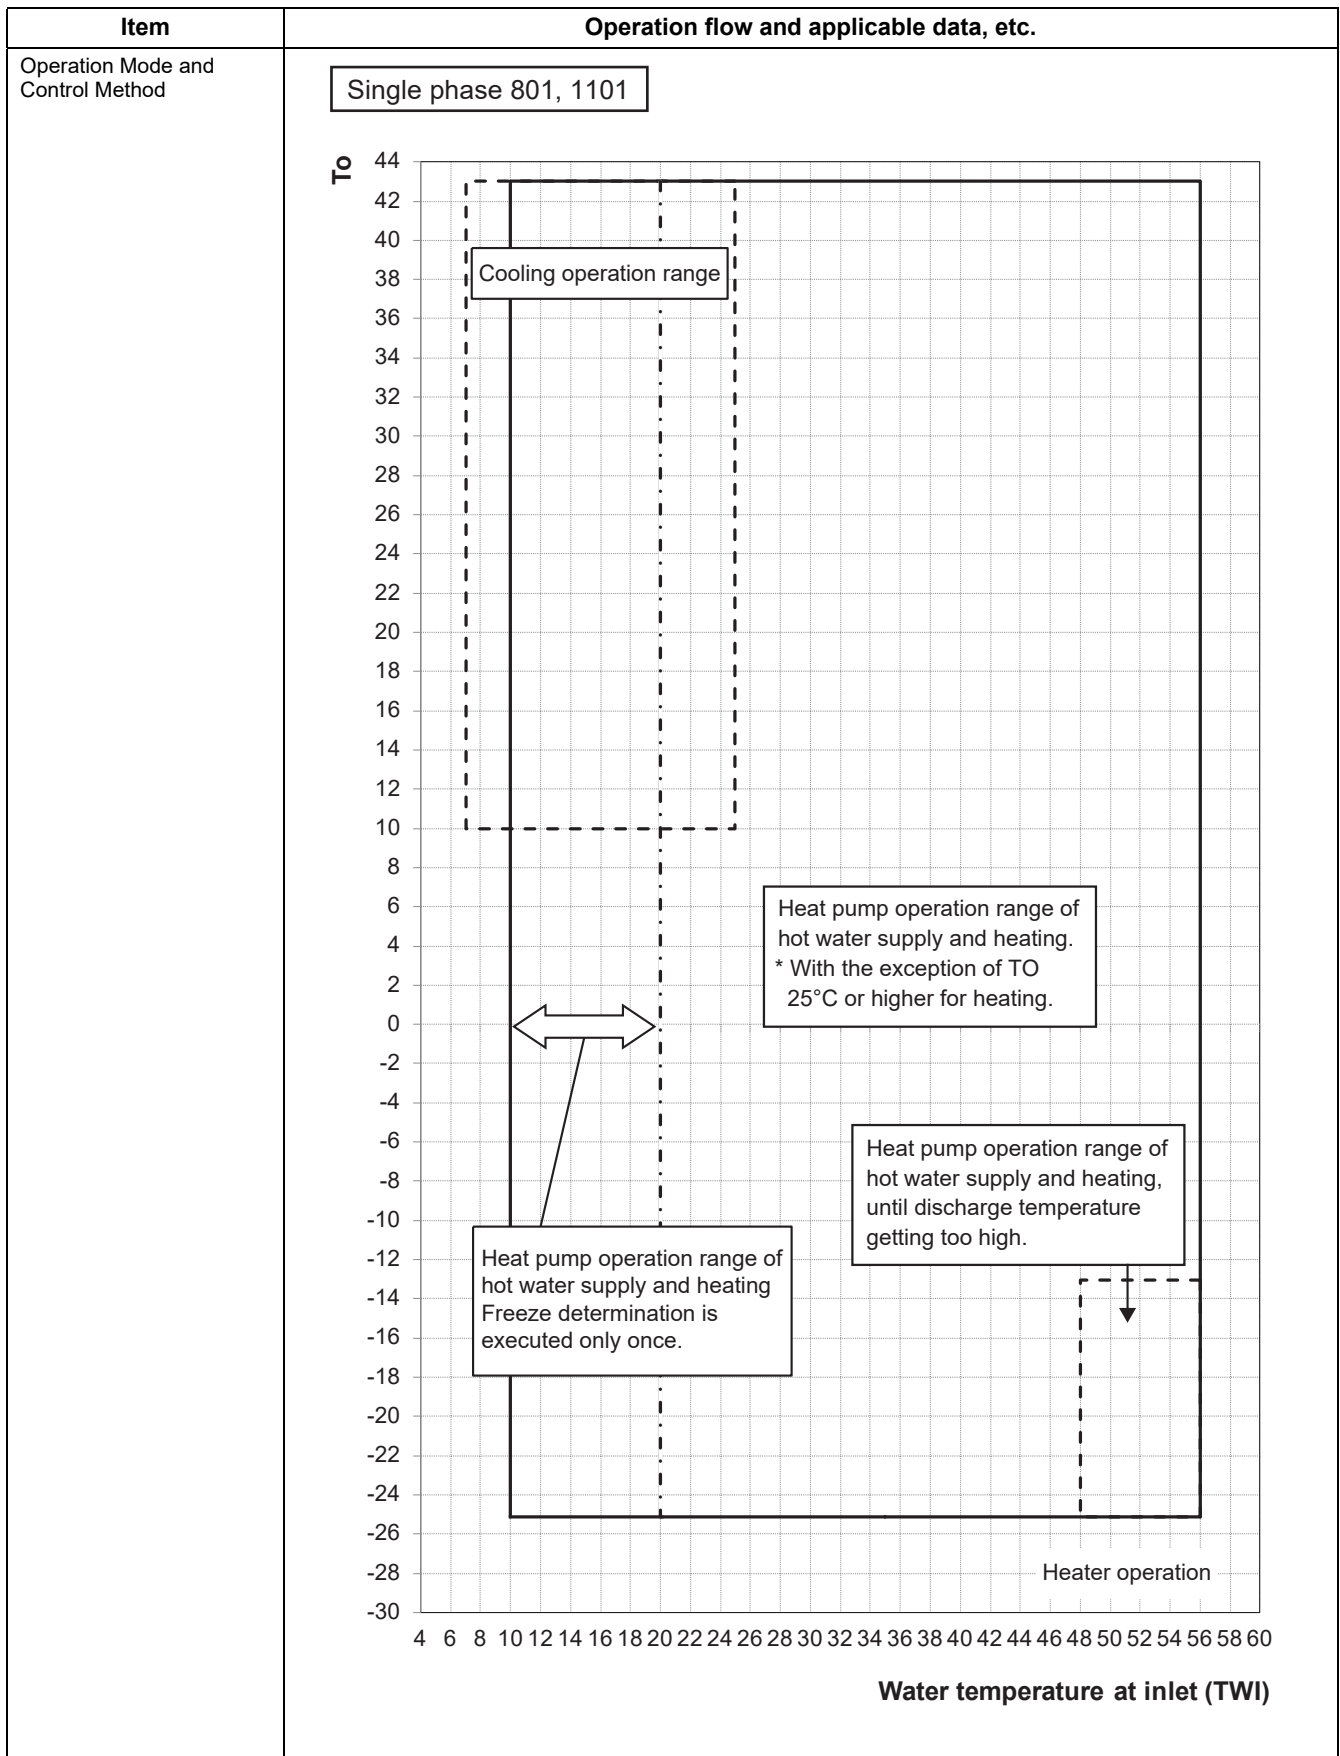

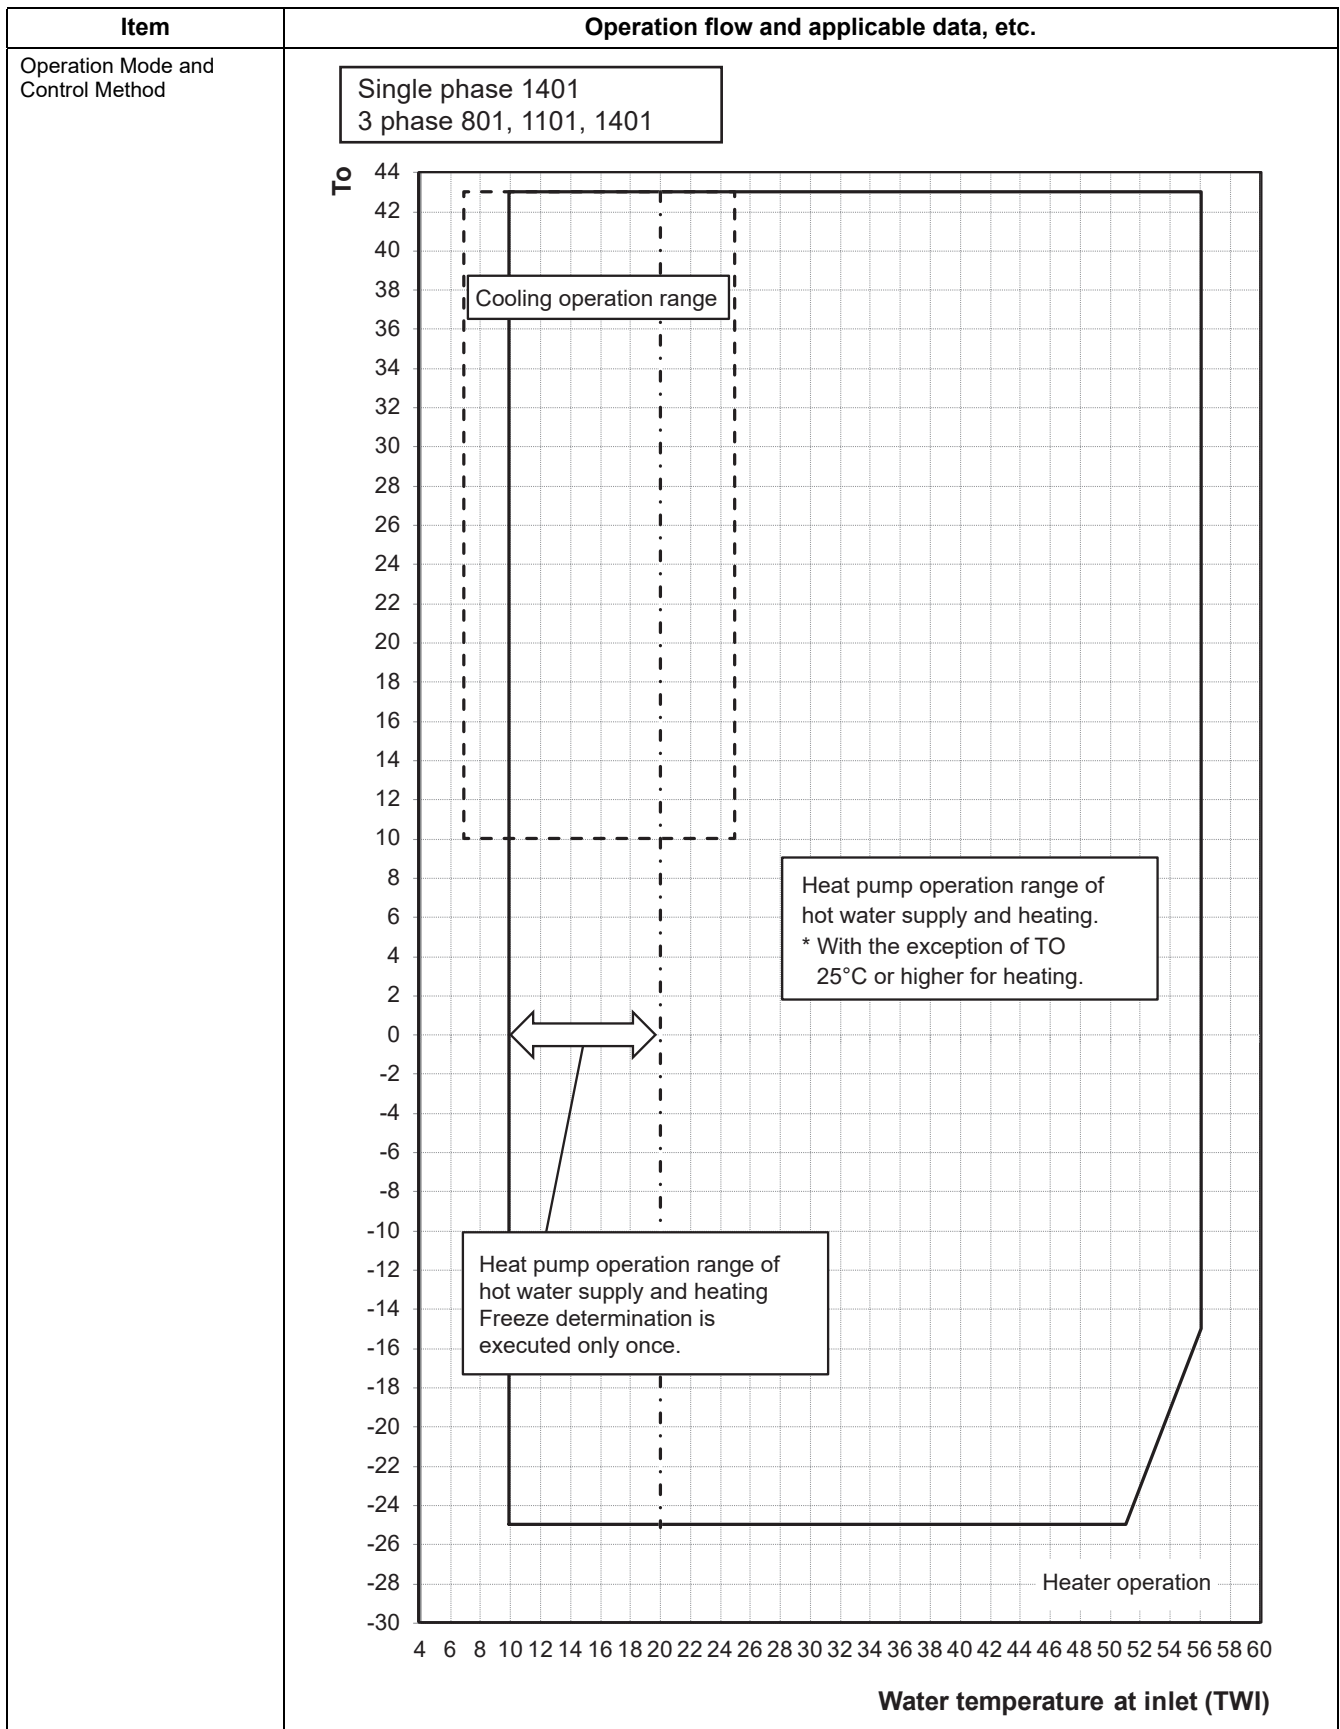

3-6. Sound Data


3-6-1. Sound Characteristics (NC Curve)

▼ HWT-401HW-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	49	52


△ Heating
○ Cooling

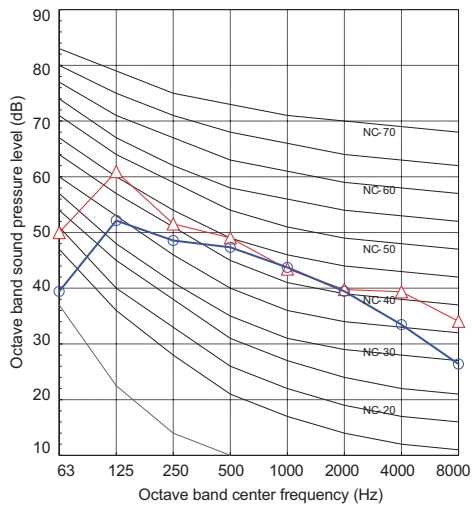

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	46	45


△ Heating
○ Cooling

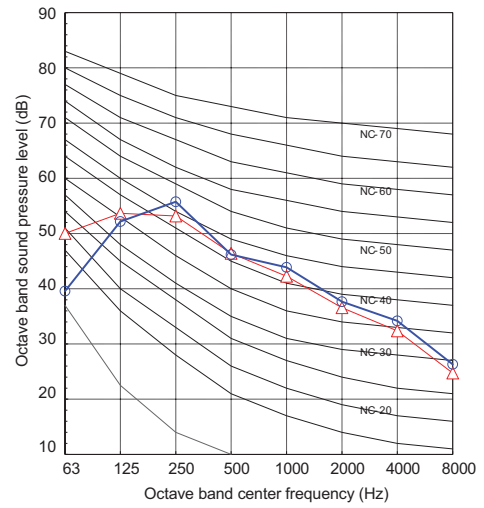

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	41	40

△ Heating
○ Cooling

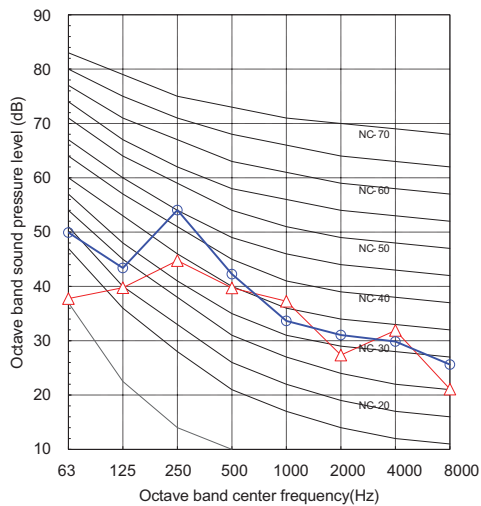


▼ HWT-601HW-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	49	53


△ Heating
○ Cooling

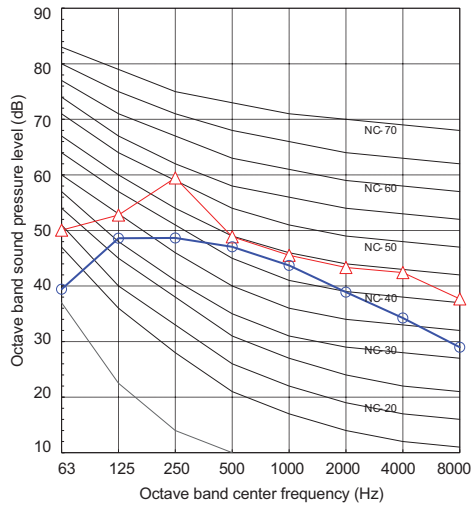

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	46	46


△ Heating
○ Cooling

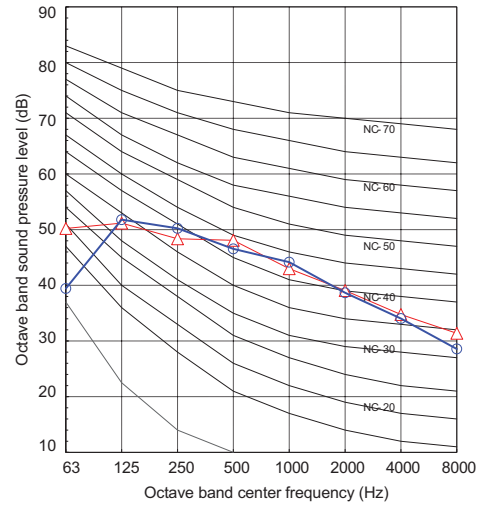

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	41	42

△ Heating
○ Cooling

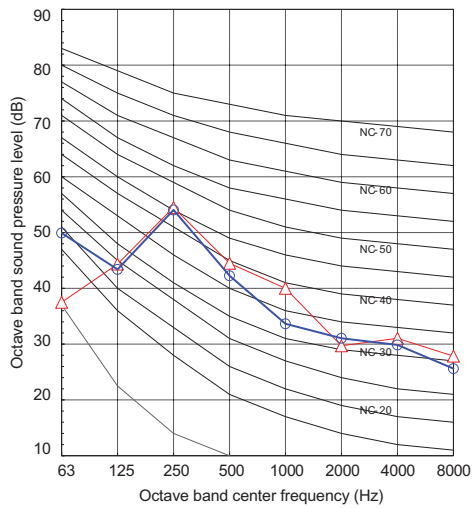


▼ HWT-801H(R)W-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	50	52


△ Heating
○ Cooling

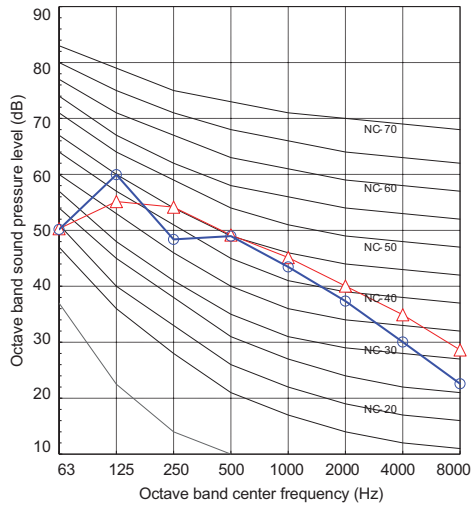

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	50	51


△ Heating
○ Cooling

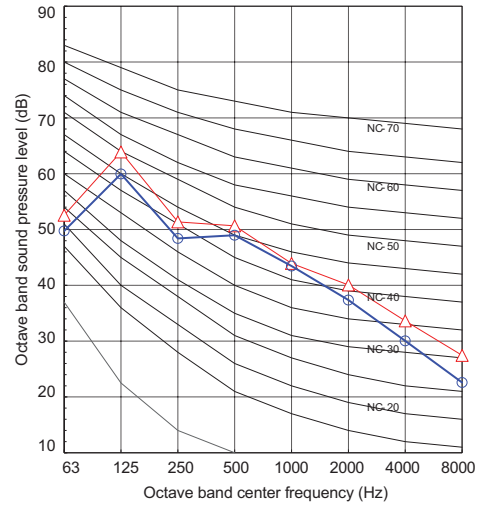

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	47	46

△ Heating
○ Cooling

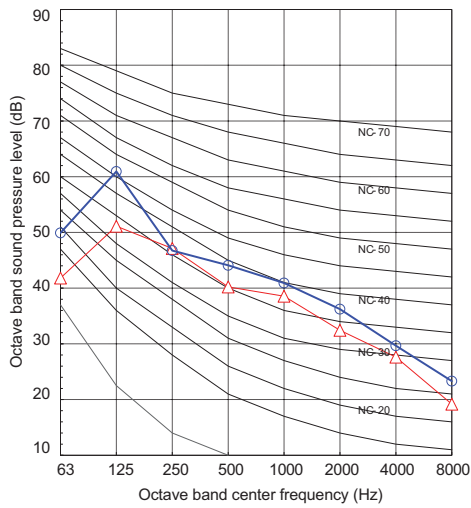


▼ HWT-1101H(R)W-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	51	53


△ Heating
○ Cooling

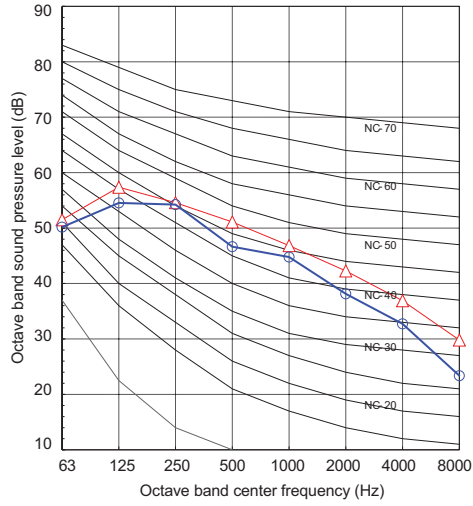

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	51	51


△ Heating
○ Cooling

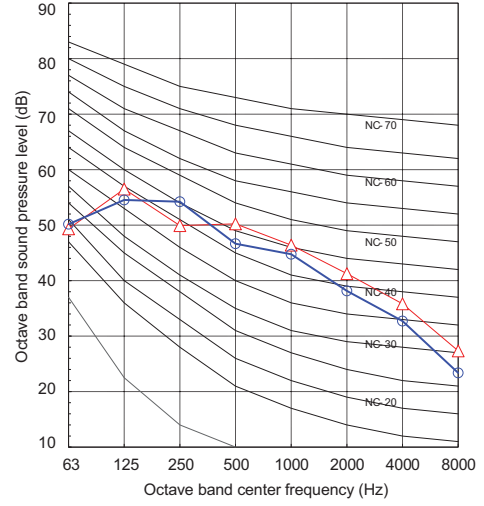

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	47	49

△ Heating
○ Cooling

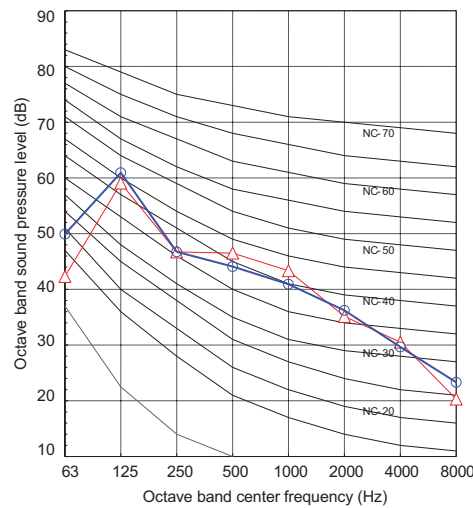


▼ HWT-1401H(R)W-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	59	60


△ Heating
○ Cooling

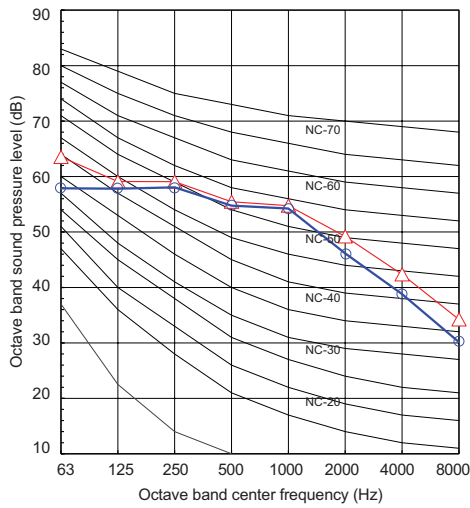

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	59	59


△ Heating
○ Cooling

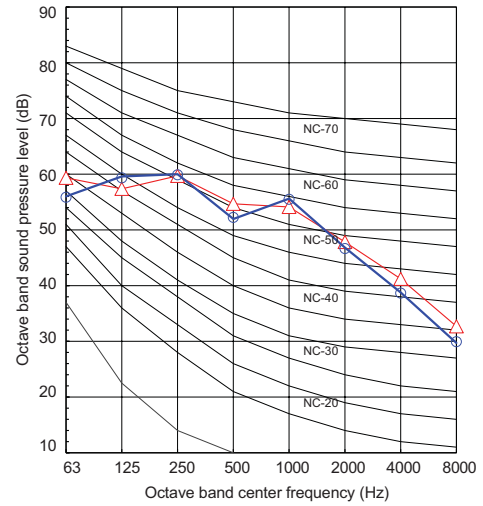

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	51	50

△ Heating
○ Cooling

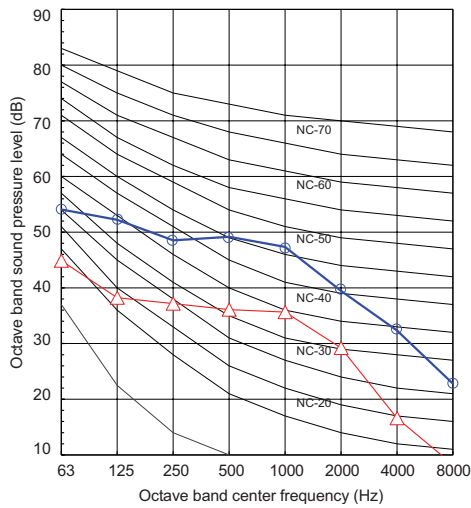


▼ HWT-801H8(R)W-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	53	59


△ Heating
○ Cooling

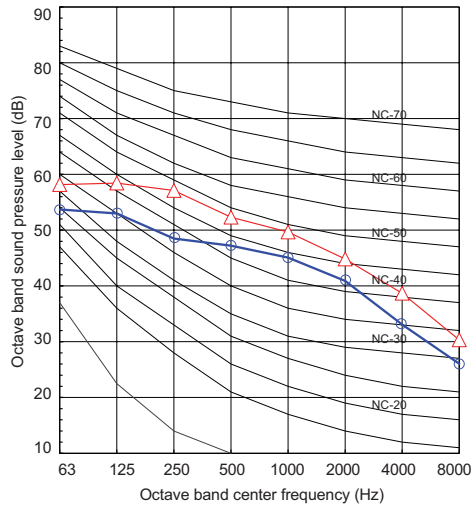

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	53	50


△ Heating
○ Cooling

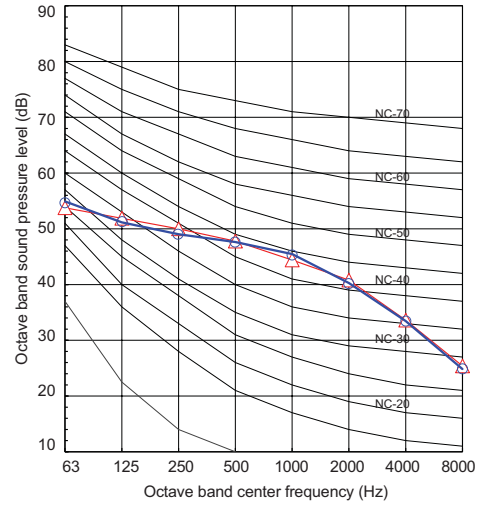

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	48	49

△ Heating
○ Cooling

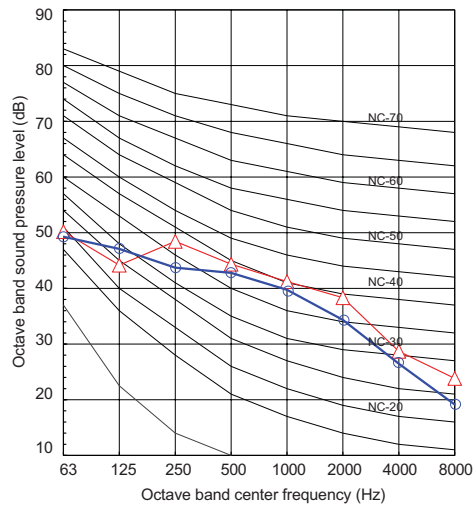


▼ HWT-1101H8(R)W-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	54	60


△ Heating
○ Cooling

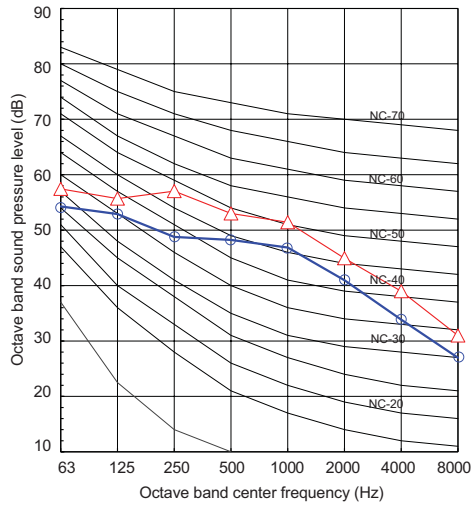

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	54	58


△ Heating
○ Cooling

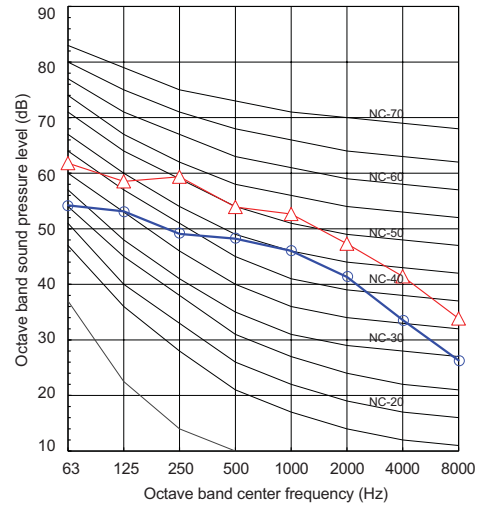

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	49	49

△ Heating
○ Cooling

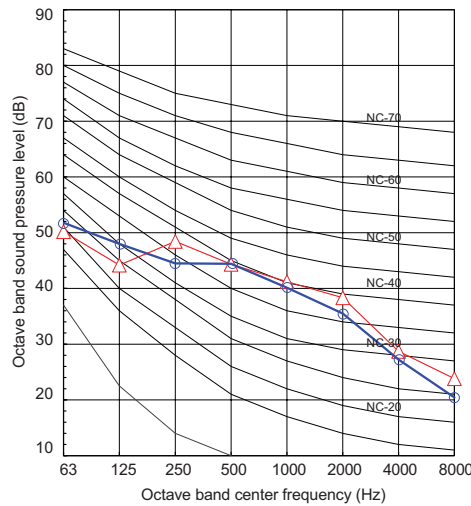


▼ HWT-1401H8(R)W-E

- Maximum operation

Sound pressure level (dB(A))	Cooling	Heating
	59	60


△ Heating
○ Cooling

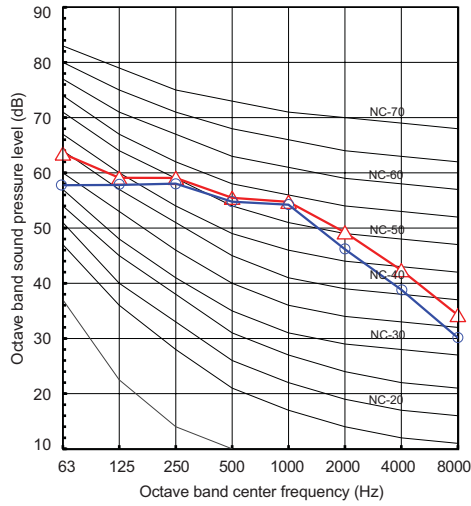

- Rated operation

Sound pressure level (dB(A))	Cooling	Heating
	59	59


△ Heating
○ Cooling

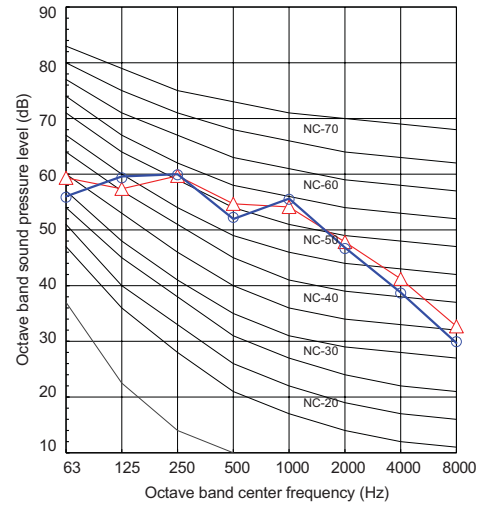

- Silent operation

Sound pressure level (dB(A))	Cooling	Heating
	51	50

△ Heating
○ Cooling

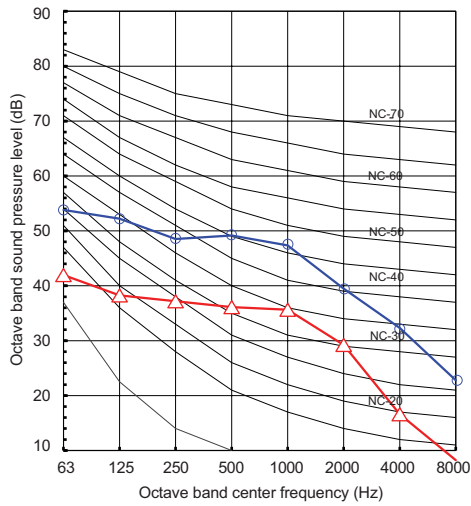



3-6-2. Sound Power

▼ HWT-401HW-E

- Maximum operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55



Sound power level (dB(A))	Cooling	Heating
	62	65

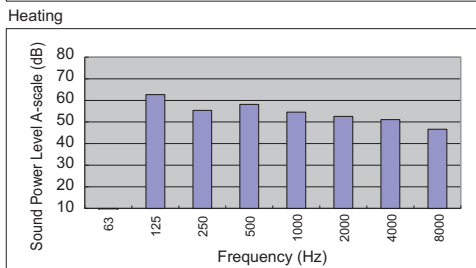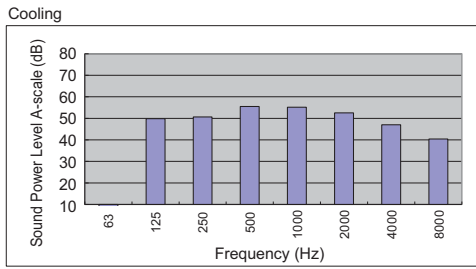

- Rated operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35



Sound power level (dB(A))	Cooling	Heating
	60	59

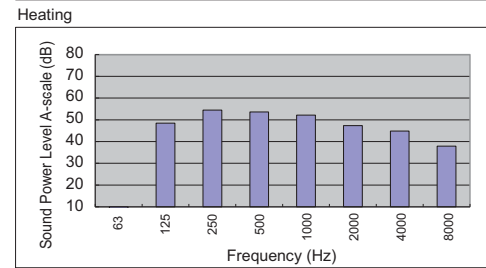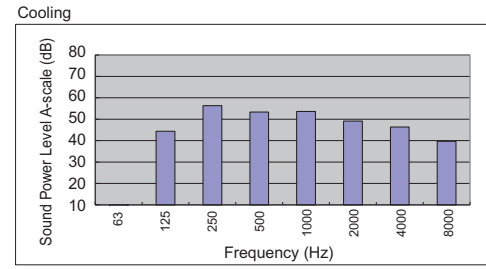

- Silent operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	55	54

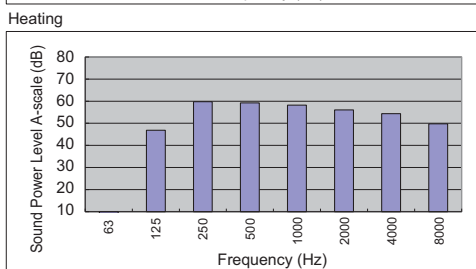
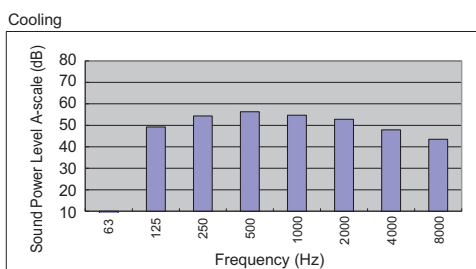


▼ HWT-601HW-E

- Maximum operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55



Sound power level (dB(A))	Cooling	Heating
	62	65

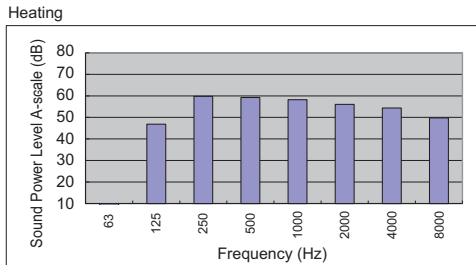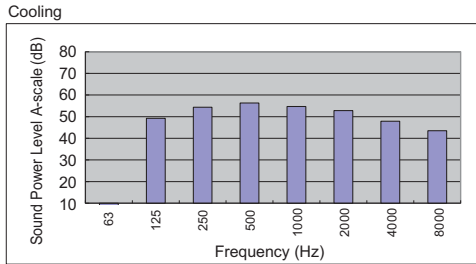

- Rated operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35



Sound power level (dB(A))	Cooling	Heating
	61	62

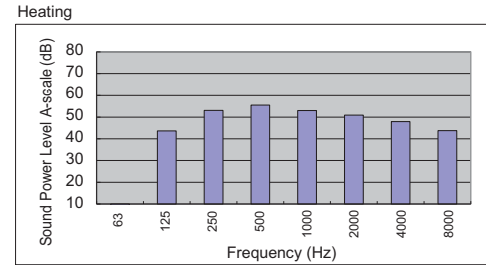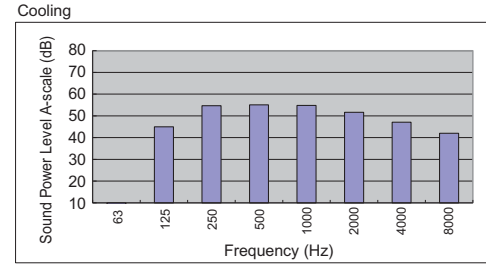

- Silent operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	57	58

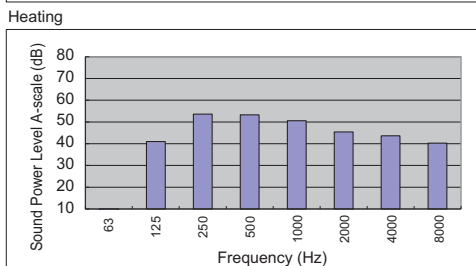
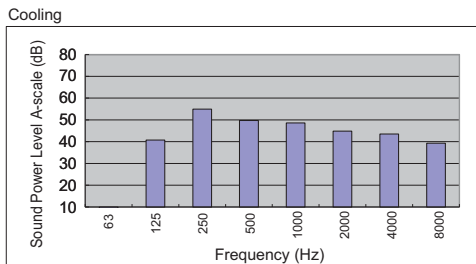


▼ HWT-801H(R)W-E

- Maximum operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55



Sound power level (dB(A))	Cooling	Heating
	63	65

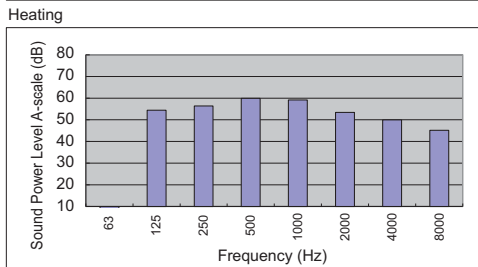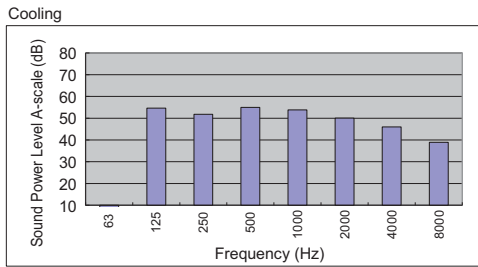

- Rated operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35



Sound power level (dB(A))	Cooling	Heating
	62	63

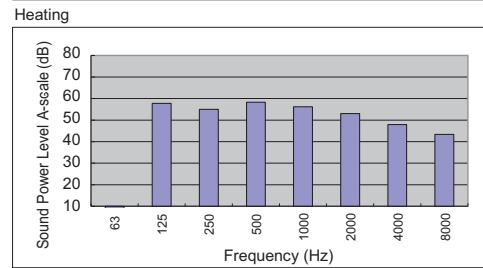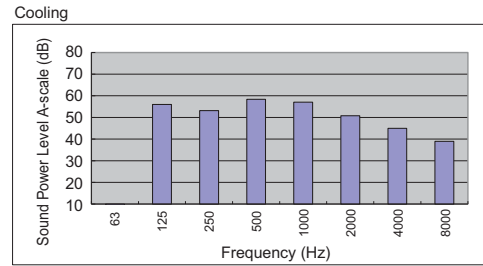

- Silent operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	59	58

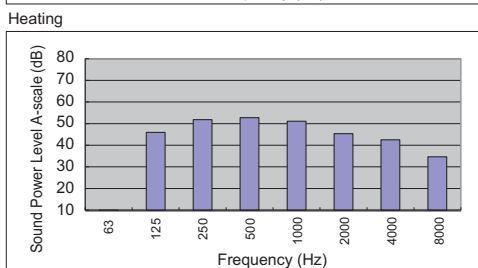
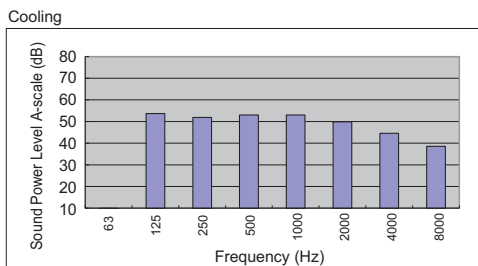


▼ HWT-1101H(R)W-E

- Maximum operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55



Sound power level (dB(A))	Cooling	Heating
	64	65

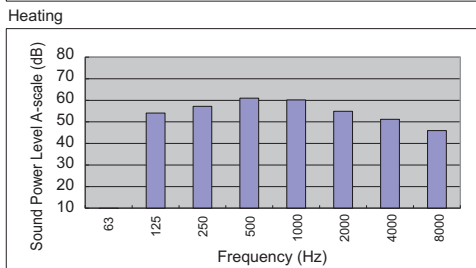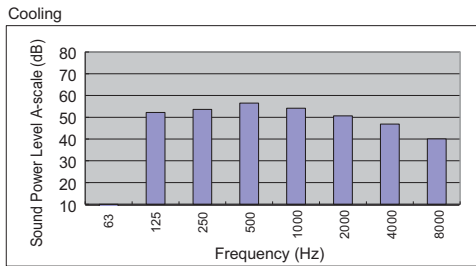

- Rated operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35



Sound power level (dB(A))	Cooling	Heating
	62	64

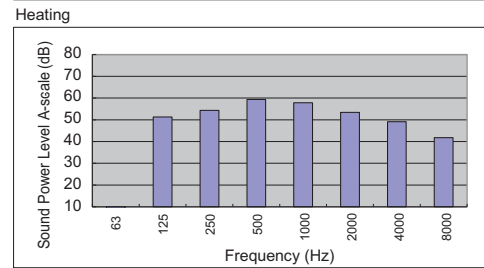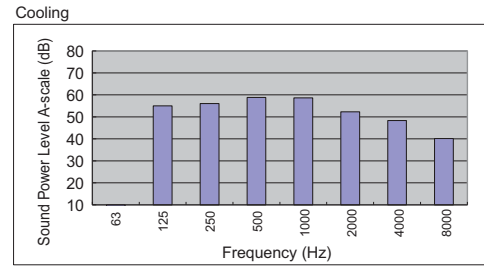

- Silent operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	60	62

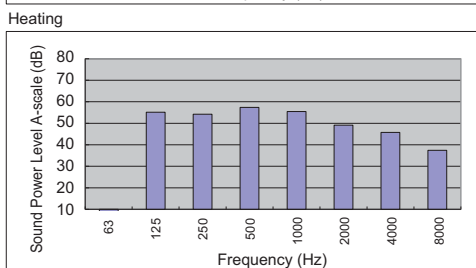
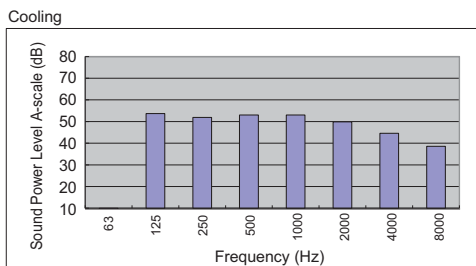


▼ HWT-1401H(R)W-E

- Maximum operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55



Sound power level (dB(A))	Cooling	Heating
	70	72

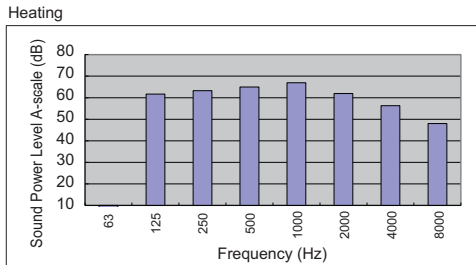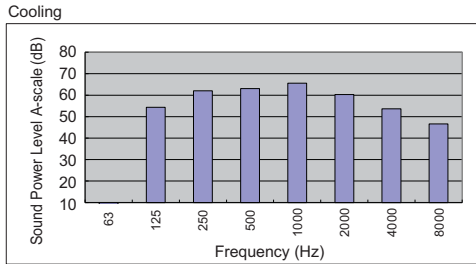

- Rated operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35



Sound power level (dB(A))	Cooling	Heating
	70	70

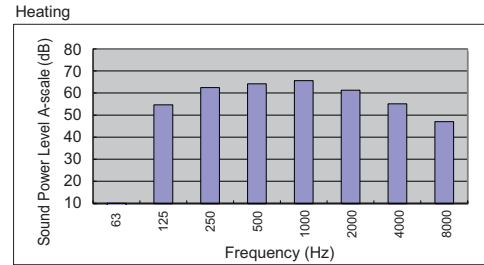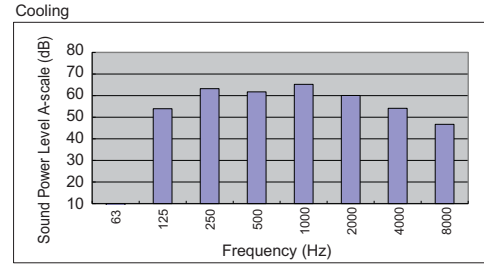

- Silent operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	63	62

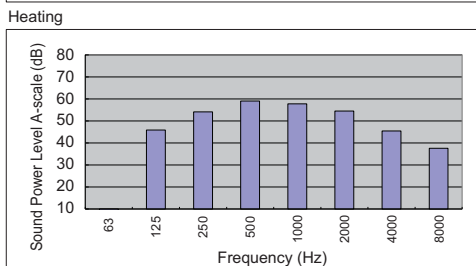
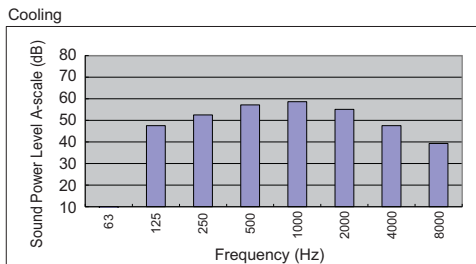


▼ HWT-801H8(R)W-E

- Maximum operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55



Sound power level (dB(A))	Cooling	Heating
	66	71

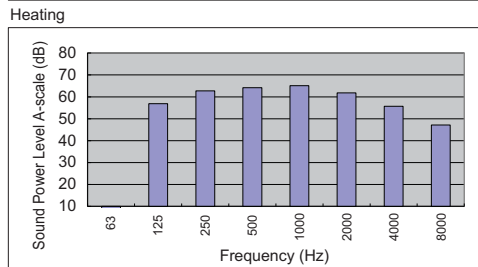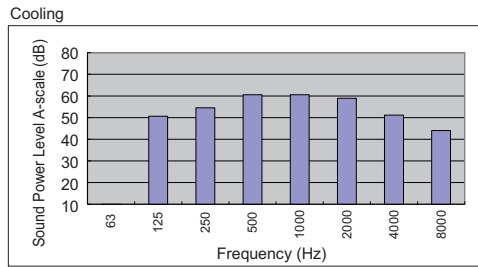

- Rated operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35



Sound power level (dB(A))	Cooling	Heating
	65	63

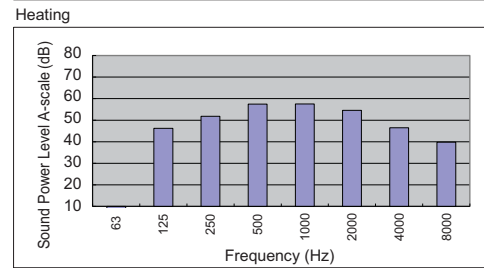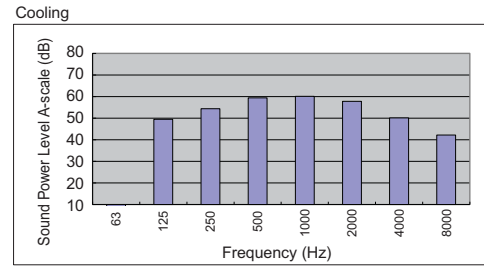

- Silent operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	61	61

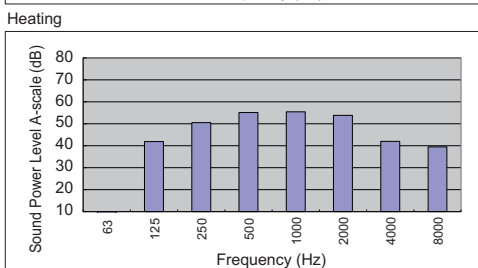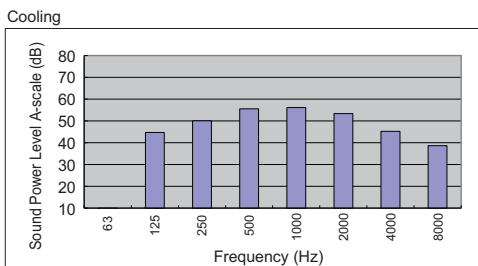


▼ HWT-1101H8(R)W-E

- Maximum operation


Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55

Sound power level (dB(A))	Cooling	Heating
	67	72

Cooling

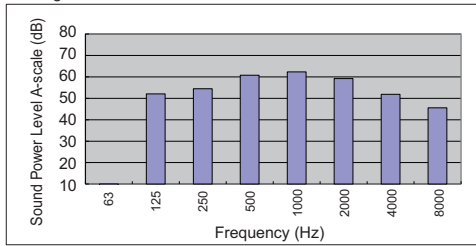

Heating

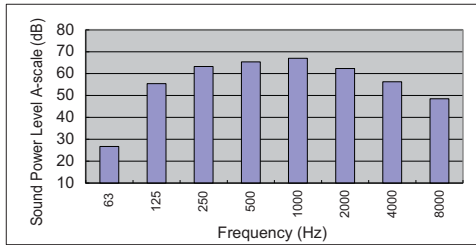


- Rated operation


Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	67	70

Cooling

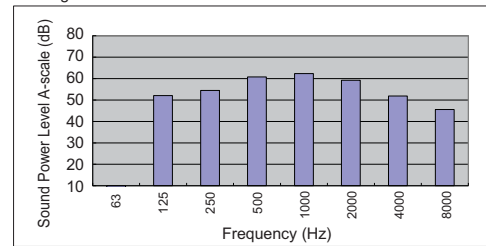

Heating

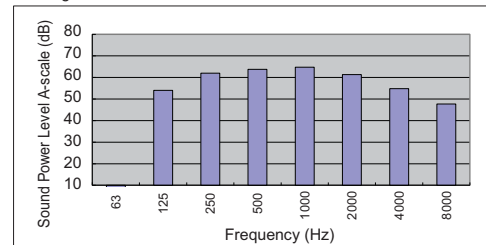


- Silent operation


Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	62	61

Cooling

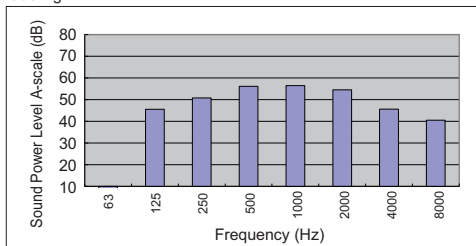

Heating


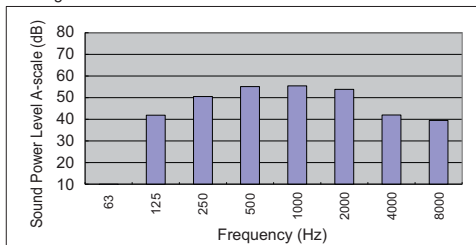


▼ HWT-1401H8(R)W-E

- Maximum operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W47/55



Sound power level (dB(A))	Cooling	Heating
	70	72

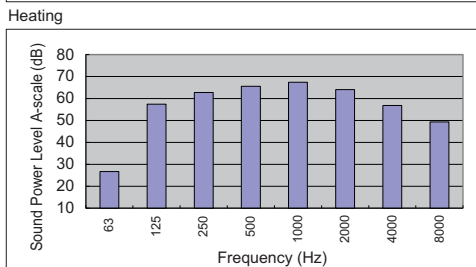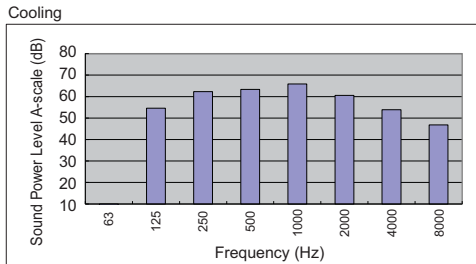

- Rated operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35



Sound power level (dB(A))	Cooling	Heating
	70	70

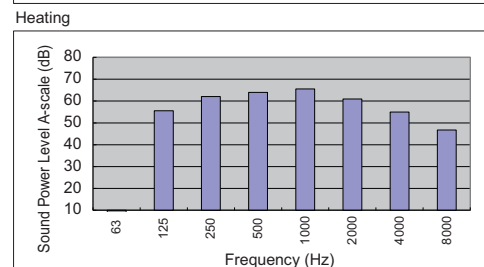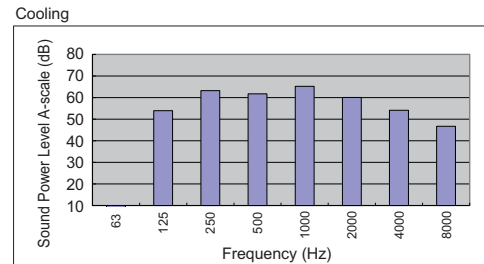

- Silent operation

Condition		
Cooling	A35/-	W12/7
Heating	A7/6	W30/35

Sound power level (dB(A))	Cooling	Heating
	63	62

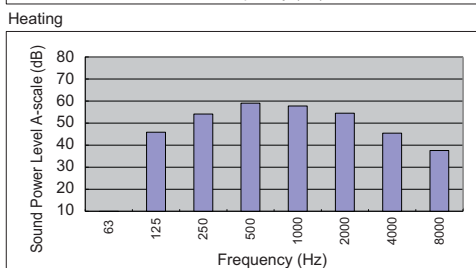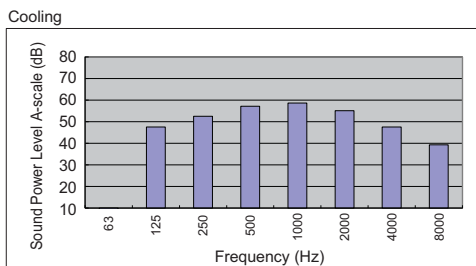

4. HOT WATER CYLINDER



4-1. Specifications

Hot water cylinder specifications

Hot water cylinder			HWS-1501 CSHM3-E	HWS-2101 CSHM3-E	HWS-3001 CSHM3-E
Water volume		litres	150	210	300
Appearance	Color		White		
	Material		Plastic coated steel		
Cylinder	Material		Stainless steel		
Insulation	Material		Flame retardant expanded polyurethane foam		
	Thickness	mm	50		
Heat exchanger	Material		Stainless steel tube		
Immersion heater	Type		Single straight, Alloy 825 sheathed		
	Capacity	kW	2.75		
Outer dimension	Height	mm	1,090	1,474	2,040
	Diameter	mm	550		
Unit weight		kg	31	41	59
Packing dimension	Height	mm	1,213	1,781	2,118
	Width	mm	576		
	Depth	mm	640		
Total weight	unit and packing	kg	37	44	59
Maximum water temperature		°C	75		
Maximum water pressure		bar	10		
Water pipe Hydro-cylinder	Inlet	mm	22		
	Outlet	mm	22		
Water pipe Domestic water- cylinder	Inlet	mm	22		
	Outlet	mm	22		
Standard accessories	Expansion Vessel	litres	Not included		
			Installation manual		
			Safety group NF7bar		
			Compression nuts and olives		
			Cylinder heater key spanner		

4-2. Dimension


General dimensions and performance

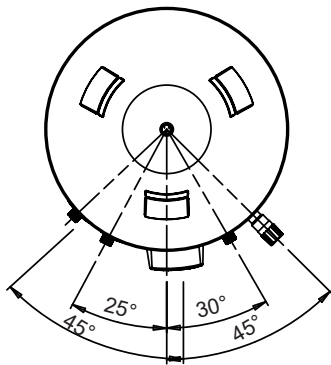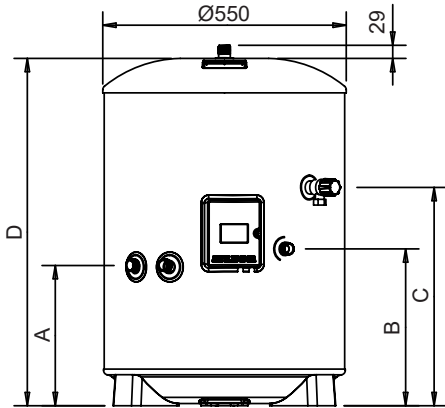


MODEL	HWS-1501CSHM3-E	HWS-2101CSHM3-E	HWS-3001CSHM3-E
NOMINAL CAPACITY (litres)	150	210	300
A (mm)	315	315	315
B (mm)	354	354	354
C (mm)	800	1184	1474
D (mm)	1090	1474	2040
SURFACE AREA (sq.m)	0.65	0.79	0.79
HOT WATER OUTPUT AT 60°C (litres)	102	163	254
MIXED HOT WATER OUTPUT AT 40°C (litres)	243	329.5	476
HEATLOSS (kWh/24h)	1.45	1.91	2.52
HEATING TIME 15°C TO 60°C - USING ELECTRIC CYLINDER HEATER ONLY (mins)	123	188	262
CAPACITY HEATED USING ELECTRIC CYLINDER HEATER ONLY (litres)	102	163	254

4-3. Piping Diagram

▼HWS-1501CSHM3-E, HWS-2101CSHM3-E, HWS-3001CSHM3-E

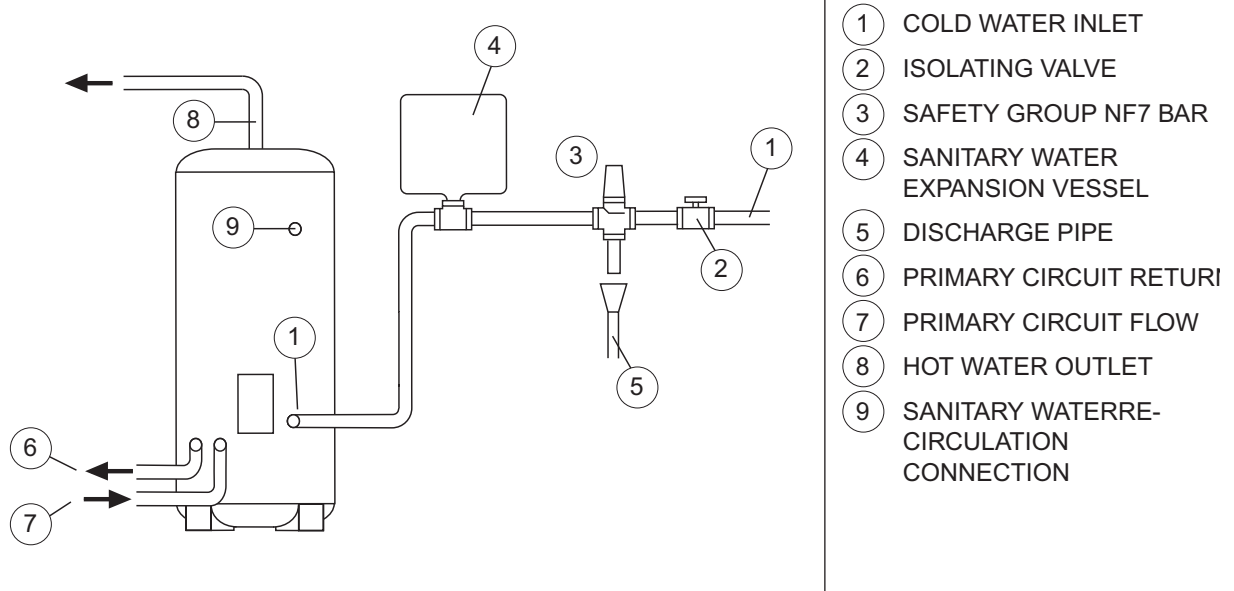


Typical discharge pipe arrangement
(extract from Building Regulation G3 Guidance section 3.9)

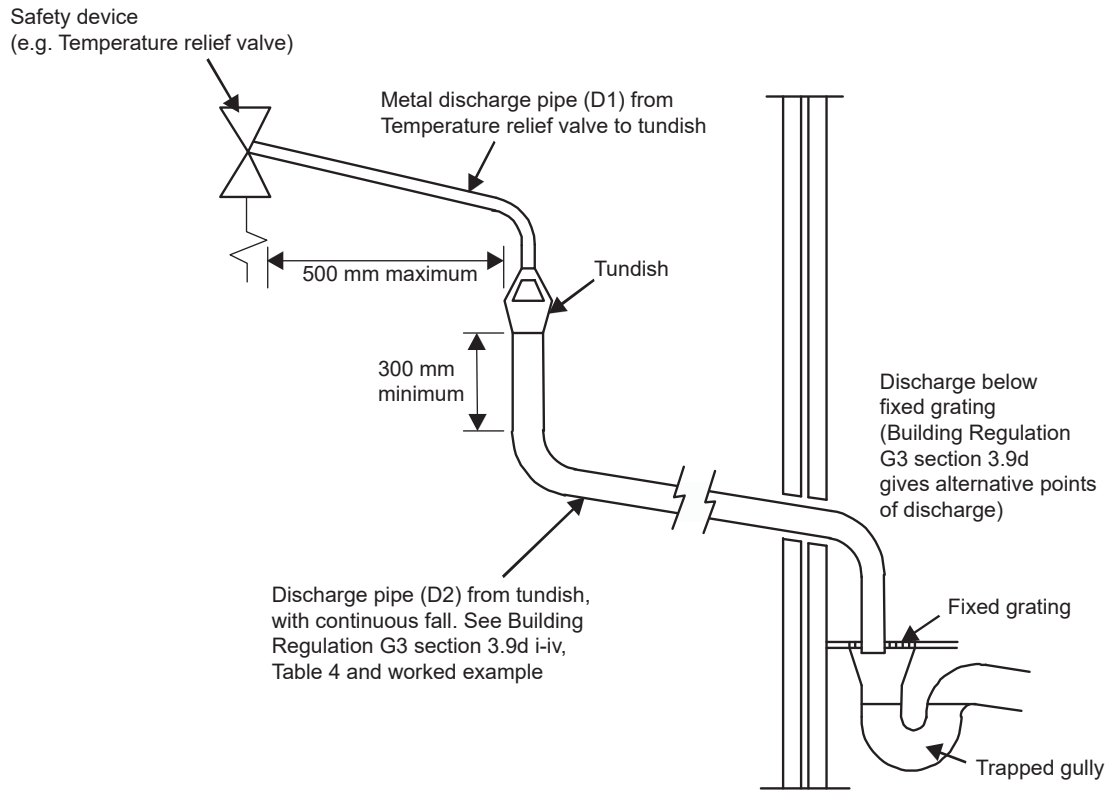


4-4. Wiring Diagram

▼HWS-1501CSHM3-E, HWS-2101CSH3-E, HWS-3001CSHM3-E Electrical Connections (Schematic)

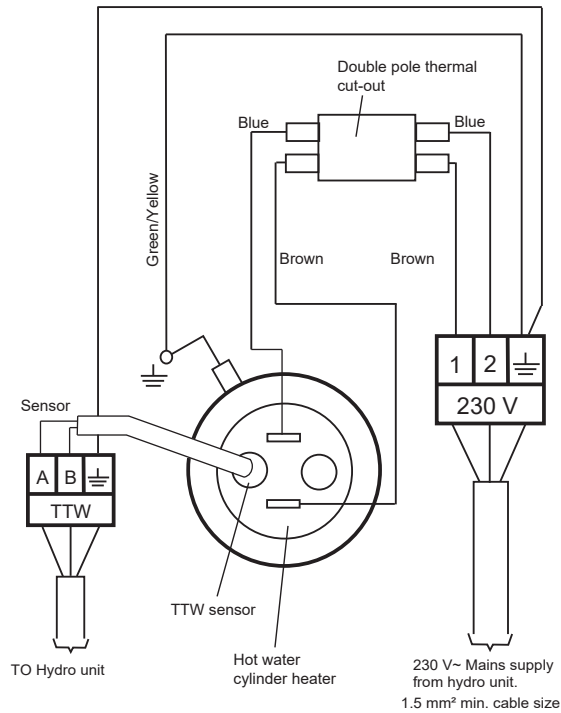

Thermal cut-out

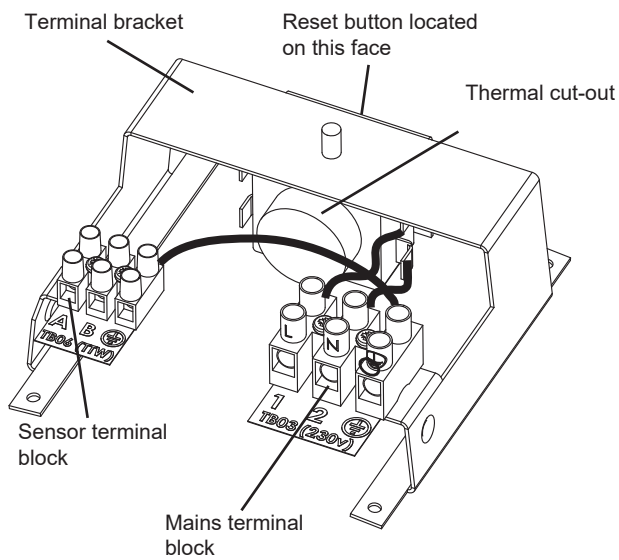

NOTE:

The cover and element assembly have been removed from this view for clarity

Air to Water Heat Pump Engineering Data Book

April, 2023

Model name:

Hydro Unit -Wall Mounted Type-	Hydro Unit -All In One Type-		Outdoor Unit	Hot Water Cylinder
HWT-601XWHM3W-E	HWT-602S21SM3W-E	HWT-1102S21ST9W-E	HWT-401HW-E	HWS-1501CSHM3-E
HWT-601XWHM6W-E	HWT-602S21SM6W-E	HWT-1102S21MT6W-E	HWT-601HW-E	HWS-2101CSHM3-E
HWT-601XWHT6W-E	HWT-602S21ST6W-E	HWT-1102S21MT9W-E	HWT-801HW-E	HWS-3001CSHM3-E
HWT-1101XWHM3W-E	HWT-602S21MM3W-E	HWT-1402S21SM3W-E	HWT-1101HW-E	
HWT-1101XWHM6W-E	HWT-602S21MM6W-E	HWT-1402S21MM3W-E	HWT-1401HW-E	
HWT-1101XWHT6W-E	HWT-602S21MT6W-E	HWT-1402S21SM6W-E	HWT-801HRW-E	
HWT-1101XWHT9W-E	HWT-1102S21SM3W-E	HWT-1402S21MM6W-E	HWT-1101HRW-E	
HWT-1401XWHM3W-E	HWT-1102S21SM6W-E	HWT-1402S21ST6W-E	HWT-1401HRW-E	
HWT-1401XWHM6W-E	HWT-1102S21MM3W-E	HWT-1402S21MT6W-E	HWT-801H8W-E	
HWT-1401XWHT6W-E	HWT-1102S21MM6W-E	HWT-1402S21ST9W-E	HWT-1101H8W-E	
HWT-1401XWHT9W-E	HWT-1102S21ST6W-E	HWT-1402S21MT9W-E	HWT-1401H8W-E	
			HWT-801H8RW-E	
			HWT-1101H8RW-E	
			HWT-1401H8RW-E	

Toshiba Carrier Corporation